



## CUTTING DATA TABLES

For fine- and rough boring heads of BIG KAISER

# BIG KAISER – the key to higher performance

Since 1948 BIG KAISER manufactures high performance tooling solutions for the metal cutting industry. The products are developed to meet the highest standards and are fully produced in Switzerland and Japan. As part of the family owned BIG DAISHOWA Group with more than 800 employees, BIG KAISER has corporate headquarters in Switzerland, Germany and the United States.



**BIG KAISER Germany**

Founded: 2010  
Employees: 15  
Location: Vöhringen, Germany

Founded: 1967  
Employees: 640  
Location: Osaka and Awaji, Japan  
Production hall: 6 (Tool holders & Cutting tools),  
Central stock Asia, TechCenter



**BIG Daishowa Japan**



**BIG KAISER USA**

Founded: 1990  
Employees: 45  
Location: Chicago, USA  
Central stock North America  
TechCenter



**BIG KAISER Switzerland**

Founded: 1948  
Employees: 110  
Location: Zurich, Switzerland  
Production hall: 2 (Boring tools)  
Central stock Europe, TechCenter

# BIG KAISER

## INNOVATION

Investment of 10% of sales in development and infrastructure

## PRODUCTIVITY

500 000 produced collets per year and 320t processed steel per year

## GLOBAL

BIG KAISER has more than 200 sales reps and partners

## KNOW-HOW

Founded in 1948

## QUALITY AND PRECISION

Accuracy of  $\varnothing$  1  $\mu$ m

## FLEXIBILITY

Batch size 1 – 10 000 as 20 000 standard products and 1 200 special tools

## PERFORMANCE

Production area size of 135 000m<sup>2</sup>

## SERVICE

Stock levels at 95%

# CONTENTS

## GENERAL INFORMATION

Cutting Data App / Insert Development	4
Important formulas	5
Taper standards	6
Rough boring with rough boring heads SW	7 - 8
Fine boring with fine boring heads EWN/EWE	9
Special applications with fine boring heads EWN/EWE	10

## CUTTING DATA

Drilling	11
DV/BT40, HSK-A63, Capto C6	12 - 35
DV/BT50, HSK-A100, Capto C8	36 - 61
EWN 04-7, EWN 04-15	62 - 67
EWN 04-22, EWN/EWE 2-32	68 - 105
EWN/EWE 2-152	106 - 141
Application data for CBN and PCD inserts	142

On the following pages, tables with recommended speeds and feeds are provided. The values in these tables are the result of practical experience and specific tests. They serve as guidelines to help operators use BIG KAISER boring tools efficiently.

For tools in the diameter range from 15 to 340 / 620 mm, there are different tables for the tool shank sizes DV40, BT40, HSK-A63, Capto C6 and DV50, BT50, HSK-A100, Capto C8. The tool shanks and the machines on which these tools are used, have a decisive influence on the rigidity and available drive power, which are especially important for heavy rough boring operations.

In the smaller diameter range from 0.4 – 50 mm, there are different tables for the different sizes of the fine boring heads, with their specific accessories, such as tool holders and boring cutters.

Every table has its specific colour. See table of contents.

## A Cutting Data App for Smart Phones and Tablets

BIG KAISER has developed a smartphone and tablet app to enhance the user-experience when assembling and running cutting tools while providing extremely precise cutting data. This app will help operators fine tune the optimal cutting parameters for their tool assemblies. They can save their tool adjustment history in the app for future reference; this is an essential "piece-of-the-puzzle" for shops joining the smart manufacturing movement. 61 BIG KAISER boring heads, covering diameters from Ø.01575" (Ø 0.4 mm) up to Ø24.41" (Ø 620 mm), are currently supported by this app. Cutting data for rough and fine boring tools is available in both metric and imperial units.

The key benefit that this app brings the user is that machine and tool data, parameters and settings are always available and can be monitored remotely in real-time. Comprehensive information is displayed on a large legible screen, providing greater comfort than the existing on-machine interface. More precise information should lead to improved decision-making, thereby contributing to the bottom line.



To the App

### Convenience at Your Fingertips!


- Cutting data calculator
- Calculator for adjusting tools
- Quick access to operating manuals
- Tool overview
- Application data
- Store favorites
- Tool Tips
- Metric and imperial units available

## Insert Development

The customer shall reach the best possible results in terms of performance, precision and cost efficiency for all boring operations with BIG KAISER twin cutter and precision boring tools. Therefore, not only outstanding boring tools are required, but also inserts, specially designed for boring, which fulfil the highest demands.

BIG KAISER invests continuously in development and tests of new inserts. New geometries will be defined, coatings tested and different substrates evaluated, often also in co-operation with carbide- and coolant manufacturers.

Criteria	Workpiece Material	Machining Process	Cutting Condition
To be considered	Material group Crystalline structure	Rough boring Fine boring Bore diameter Depth of cut (ap)	Interrupted cut Continuous cut Depth of cut Precision HSC Workpiece chucking Rigidity of tool
With effect on	Substrate of cutting material Coating	Shape of insert Size of insert	Cutting edge geometry Nose radius Rake and relief angle Chip breaker ground or sintered Circumference ground or sintered
Target	Indexable inserts for perfect chip control, maximum tool life and minimized costs		



«The selection of the indexable insert is decisive for the machining process and reduces production costs.»

Ralph Stadelmann,  
Head of Special Tooling & Testing BIG KAISER

The results of the developments and tests are shown in the BIG KAISER cutting data table. In their, you'll find the most suitable inserts for the variety of workpiece materials and machining processes in relation to the tool configuration. The table shows precise cutting data for all applications.



## Spindle speed

$$n = \frac{1000 \times V_c}{D_c \times \pi} \quad (\text{min}^{-1})$$

## Cutting speed

$$V_c = \frac{n \times D_c \times \pi}{1000} \quad (\text{m/min})$$

## Feed per min.

$$V_f = f_n \times n \quad (\text{mm/min})$$

## Feed per revolution

$$f_n = f_z \times Z \quad (\text{mm})$$

## Cross section of chip

$$A = a_p \times f_n \quad (\text{mm}^2)$$

## Material removal rate (Boring)

$$Q = A \times V_c \quad (\text{cm}^3/\text{min})$$

## Cutting performance (Boring)

$$P = \frac{a_p \times f_n \times V_c \times k_c}{1000 \times 60} \quad (\text{kW})$$

## Torque (Boring)

$$M_c = \frac{(D_c^2 - D_i^2) \times f_n \times k_c}{8000} \quad (\text{Nm})$$

## Specific cutting force

$$k_c = \frac{k_c 1.1}{h^{m_c}} \quad (\text{N/mm}^2)$$

## Thickness of chip

$$h = f_z \times \sin \kappa \quad (\text{mm})$$

With an entering angle of 90° the chip thickness is equal to the feed per tooth [f<sub>z</sub>].

## Material removal rate (Drilling)

$$Q = \frac{V_f \times \pi \times D_c^2}{4 \times 1000} \quad (\text{cm}^3/\text{min})$$

## Cutting performance (Drilling)



$$P = \frac{M_c \times 2 \times \pi \times n}{60 \times 1000} \quad (\text{kW})$$

## Feed force (Drilling)

$$F_f = \frac{0.63 \times f_n \times D_c \times k_c}{2} \quad (\text{N})$$

## Torque (Drilling)

$$M_c = \frac{D_c^2 \times k_c \times f_n}{8000} \quad (\text{Nm})$$

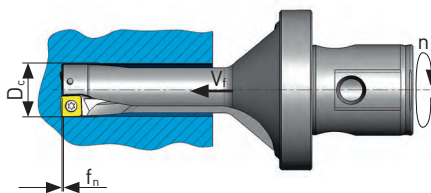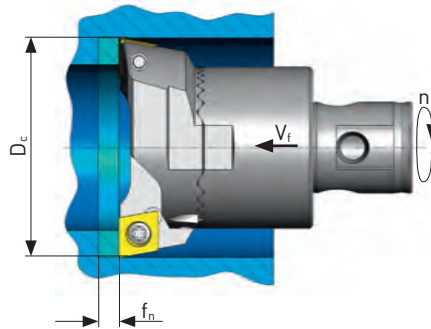

## Conversion table Metric/Inch

### Length dimensions

$$\text{mm to Inch} = \frac{\text{mm}}{25.4}$$

$$\text{m to feet} = \frac{\text{m}}{0.3048}$$

### Cutting speed

$$\text{m/min to SFM} = \text{m/min} \times 3.28$$

$$\text{RPM} = \frac{\text{SFM} \times 3.82}{D}$$

### Feed

$$\text{mm/rev to Inch/rev} = \frac{\text{mm/rev}}{25.4}$$

$$\text{IPM} = \text{RPM} \times \text{IPR}$$


Workpiece material	Workpiece material No.	k <sub>c</sub> 1.1 (N/mm <sup>2</sup> )	m <sub>c</sub>
St 37-2	1.0037	1780	0.17
St 50-2	1.0050	1990	0.26
CK 45	1.1191	2220	0.14
40CrMnMo S 8 6	1.2312	1800	0.27
X5CrNi 18 10	1.4301	2350	0.21
X5CrNiMo17 12 2	1.4401	2600	0.19
GG 20		1020	0.25
GGG 40		1005	0.25
GGG 80		1130	0.44
AL Wrought alloys	3.3535	780	0.23
AL Cast alloys	3.2581	830	0.23
TiAl 6V4	3.7164	1370	0.21

A	Cross section of chip	mm <sup>2</sup>
a <sub>p</sub>	Depth of cut	mm
D <sub>c</sub>	Cutting diameter	mm
D <sub>i</sub>	Diameter of starting bore	mm
F <sub>f</sub>	Feed force	N
f <sub>n</sub>	Feed per revolution	mm
f <sub>z</sub>	Feed per tooth	mm
h	Thickness of chip	mm
k <sub>c</sub>	Specific cutting force	N/mm <sup>2</sup>
k <sub>c</sub> 1.1	Specific cutting force for a chip cross section of 1mm <sup>2</sup> and chip thickness h = 1mm	N/mm <sup>2</sup>
m <sub>c</sub>	Increase of the k <sub>c</sub> curve	
M <sub>c</sub>	Torque	Nm
n	Spindle speed	min <sup>-1</sup>
P	Cutting performance	kW
Q	Material removal rate	cm <sup>3</sup> /min
V <sub>c</sub>	Cutting speed	m/min
V <sub>f</sub>	Feed per min.	mm/min
Z	Number of teeth	

# Taper standards


## Steep taper shanks DIN 69871 / DV

DV	30	40	45	50
ØD1	31.75	44.45	57.15	69.85
ØD2 max.	45	50	63	80
ØD3	50	63.55	82.55	97.5
L1	47.8	68.4	82.7	101.75
L2	19.1	19.1	19.1	19.1
L3 min.	35	35	35	35
L4	16.4	22.8	29.1	35.5
L5	19	25	31.3	37.7
b	16.1	16.1	19.3	25.7
M	M12	M16	M20	M24

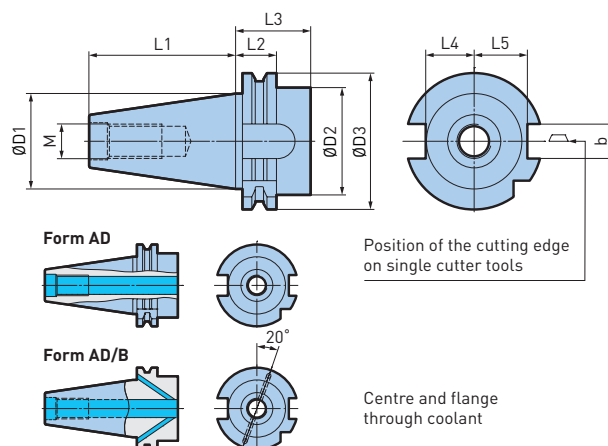


## Steep taper shanks JIS B6339/BT

BT	30	40	45	50
ØD1	31.75	44.45	57.15	69.85
ØD2	46	63	85	100
y	2	2	3	3
L1	48.4	65.4	82.8	101.8
L2	20	25	30	35
L3	16.3	22.6	29.1	35.4
b	16.1	16.1	19.3	25.7
M	M12	M16	M20	M24

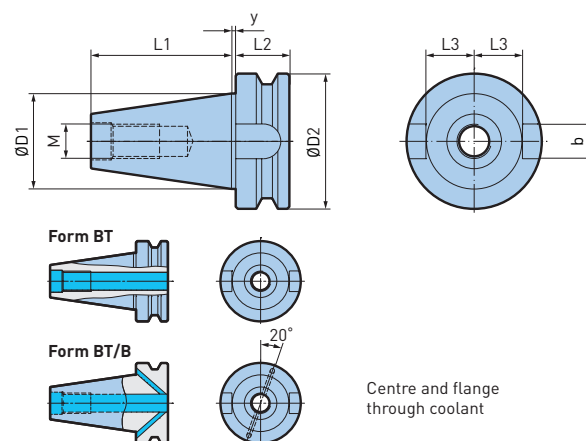


## Hollow taper interface DIN 69893, form A

HSK-A	32	40	50	63	80	100
ØD1	32	40	50	63	80	100
ØD2	24.007	30.007	38.009	48.010	60.012	75.013
ØD3 max.	26	34	42	53	68	88
L1	16	20	25	32	40	50
L2	20	20	26	26	26	29
L3 min.	35	35	42	42	42	45
b1	7.05	8.05	10.54	12.54	16.04	20.02
t1	5.4	5.2	5.1	5.0	4.9	4.9

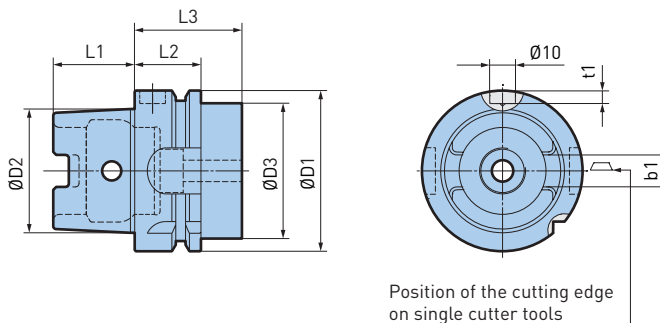


## Hollow taper interface DIN 69893, form E

HSK-E	25	32	40	50	63
ØD1	25	32	40	50	63
ØD2	19.006	24.007	30.007	38.009	48.010
ØD3 max.	20	26	34	42	53
L1	13	16	20	25	32
L2	10	20	20	26	26
L3 min.	20	35	35	42	42

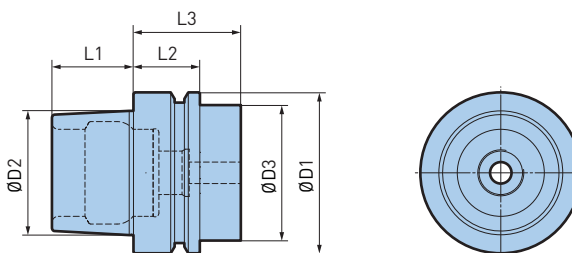

## BIG CAPTO (compatible with ISO 26623-1, polygonal hollow shank taper with face contact)


C	4	5	6	8
ØD1	40	50	63	80
L1	24	30	38	48
L2	20	20	22	30

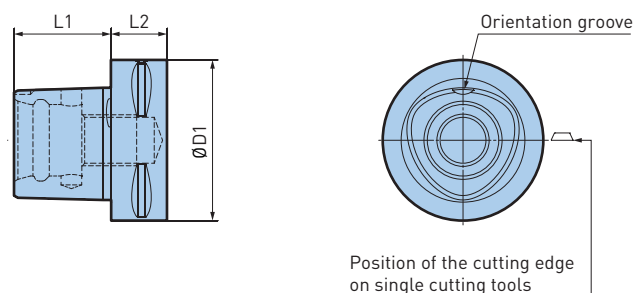

## Rough boring methods

### 1. RSS Rotationally symmetrical rough boring

The symmetrical cutter arrangement is the most used adjustment for twin cutter heads. Especially suitable for small to medium stock removal (up to 10% of the final bore diameter) with high feed rates.




#### Examples

(Insert holders type CC, SC, SD and WC)

Boring head	Ød	ØD
SW / 32	38	42
SW / 41	45	50
SW / 68	90	100

### 2. DVS Double offset rough boring

Diameter and height offset cutters allow the removal of twice the stock (20% of the final bore diameter), with half the feed rate and excellent chip control.

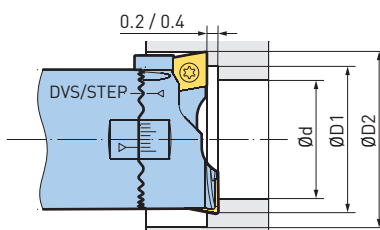


#### Examples (Insert holders type CC)

Boring head	Ød	ØD1	ØD2
SW 25	28	31.5	35
SW 53	60	67.5	75
SW 100	110	125	140

### 3. VPS Full profile rough boring

Heavily offset cutter arrangement in diameter for largest stock removal (up to 40 % of the final diameter), with surprisingly low power requirement. Due to the use of inserts type WC, the boring head functions like an adjustable insert drill for rough boring.






#### Examples (Insert holders type CC)

Boring head	Ød	ØD1	ØD2
SW / 41	38	52	62
SW / 53	45	63	75
SW / 68	67	90	110

## Adjustment instructions for rough boring heads SW




### Rotationally symmetrical rough boring

Both cutting edges are adjusted to the same length and to the same diameter. Mount the long insert holder "L" on the short support "B2" of the tool body and the short insert holder to the long support "B1". The reference line marking on both insert holders is aligned to the RSS markings on the tool body.



### Double offset rough boring

The cutting edges are displaced in length and diameter. The difference in length is achieved by mounting the insert holders in a 180° twisted position. The reference line marking on both insert holders is aligned to the DVS markings on the tool body. Adjust the cutting edge on insert holder "L" to half the stock allowance. (Pre-cutter)

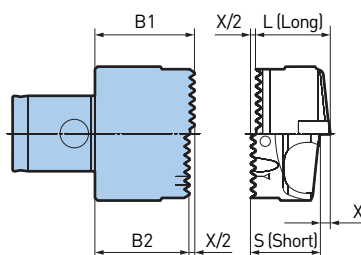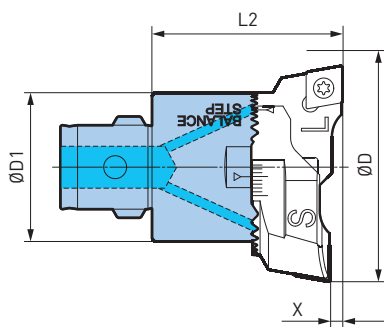

# Rough boring with rough boring heads SW



## Full profile rough boring – Application and adjustment instructions

Full profile rough boring permits rough boring with large stock allowances (30 mm and more in diameter) in a single operation, with relatively low drive consumption.

### Adjustment instructions for insert holders type WC:


- Mount the insert holders on mark "RSS".
- Set cutting edge 2 to the final bore diameter (D2).
- Set cutting edge 1 corresponding to the starting bore diameter, according to the table (column D1).
- Both cutting edges must be located at exactly the same height. Use coolant in large quantities.

Table for optimum cut sharing in full profile rough boring operations VPS

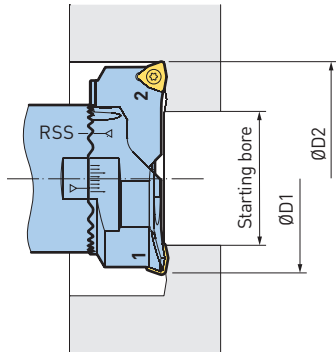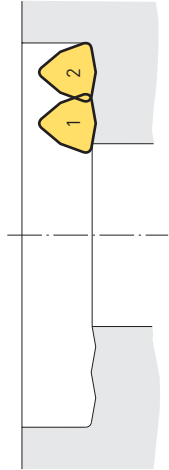

For Boring Head	Insert Holder Order No.	Starting Bore Ø	ØD1	ØD2
SW41	639.243	35 - 37.9	49	51 - 62
		38 - 41	52	54 - 62
SW53	639.253	41 - 44.9	59	61 - 76
		45 - 50	63	65 - 76
	639.257	51 - 54.9	69	76 - 86
SW68	639.263	55 - 60	73	81 - 86
		50 - 55.9	73	75 - 93
	639.267	56 - 61.9	79	81 - 93
		62 - 67	85	87 - 93
SW98	639.273	67 - 72.9	90	92 - 110
		73 - 78.9	96	98 - 110
		79 - 85	102	104 - 110
	639.277	84 - 89.9	107	109 - 129
		90 - 95.9	113	115 - 133
		96 - 102.9	119	121 - 133
		103 - 109	126	128 - 133
SW148	639.283	108 - 114.9	131	133 - 154
		115 - 121.9	138	140 - 159
		122 - 128.9	145	147 - 159
	639.287	129 - 135	152	154 - 159
		134 - 139.9	157	159 - 179
		140 - 145.9	163	165 - 183
		146 - 152.9	169	171 - 183
639.287	153 - 159	176	178 - 183	
	158 - 164.9	181	183 - 204	
	165 - 171.9	188	190 - 209	
639.287	172 - 178.9	195	197 - 209	
	179 - 185	202	204 - 209	

## Driving power

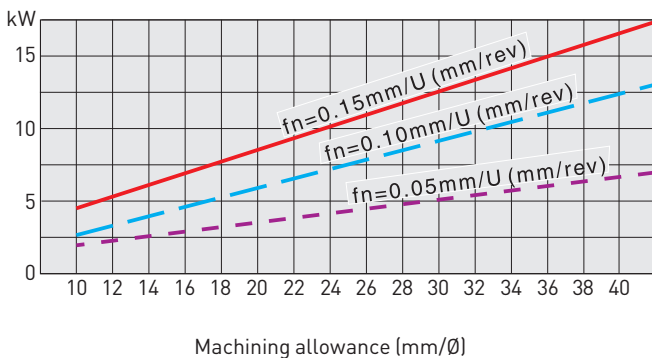

Vc = 100 m/min  
 Material: St 60, Kc1 = 2110 N/mm<sup>2</sup>  
 Efficiency η = 0.8

### Cutting data-guide values

Cutting speed: Vc = 100 - 200 m/min  
 Feed: fn = 0.05 - 0.15 mm/U



## Fine boring methods

There are two different methods of precision boring, machining with the fine boring cycle and machining with the reaming cycle. Both methods have advantages:

### Fine boring cycle (G 76)

boring – spindle stop – spindle orientation – displacement – retraction

This cycle is used for:

- deep bores with long tools
- low cutting speeds and low rpm
- large boring diameter > 200 mm Ø
- problems with tool life and surface quality

### Reaming cycle (G 85)

Forward – backward boring


This cycle is used for:

- short bores
- small diameters
- high cutting speeds and high rpm
- tight form and position tolerances

## Extension of the boring range

### Insert holder type E, with 87° approach angle


For each one of the fine boring heads EWN 20 - EWN 100 and EWE 41 - EWE 100 there are two additional insert holders (size 2 and size 3) available for the extension of the boring range and for back boring. The boring range from Ø20 - 153 mm is covered with insert holder size 1 of each boring head.

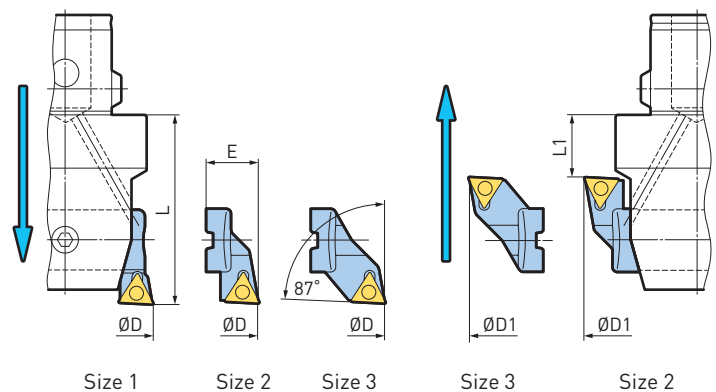

### Insert holder Type C, with 90° approach angle

For each of the fine boring heads EWN 25 - EWN 100 and EWE 41 - EWE 100, there are two insert holders with 90° approach angle available.

The cutting data given in the tables is valid for the insert holders type E and type C as well as for forward and back boring.

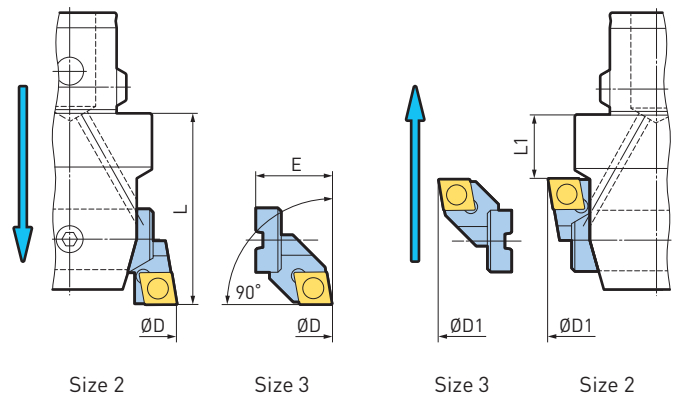


### Back boring

For back boring, it is required to enter into the bore off centre, with a tool adjusted to the back bore diameter. In this respect, the back bore diameter "ØD" as well as the diameters of the entry bore "C" and the tool body "A", are related to each other. These values can be calculated as follows:

#### Caution:

- Counter clockwise spindle rotation is required for back boring operations.
- The cutting edge is at a shorter length than the boring head. Consider total length of tool. Check the space at the back side of the workpiece.

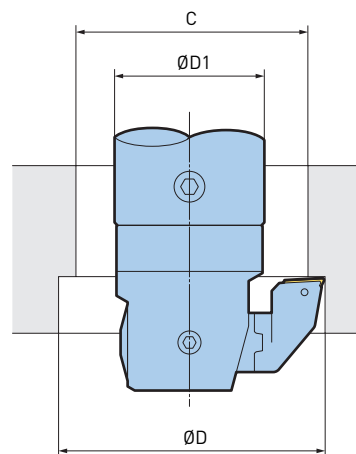

Min. entry bore diameter "C"

$$C = \frac{\text{ØD} + \text{ØD1}}{2}$$

Max. back bore diameter "ØD"

$$\text{ØD} = 2C - \text{ØD1}$$


Max. tool body diameter "A"

$$\text{ØD1} = 2C - \text{ØD}$$

# Special applications with fine boring heads EWN/EWE

## Chamfering and recessing


Special insert holders for chamfering 30° and 45° as well as for recessing in stepped bores.



## Face grooving Ø 14 - Ø 3040 mm


### Face grooving Ø 14 - 53 mm

With EWN/EWE 2-152, series 112 and special tool and insert holder, groove width 2 – 3 mm, groove depth max. 5 mm

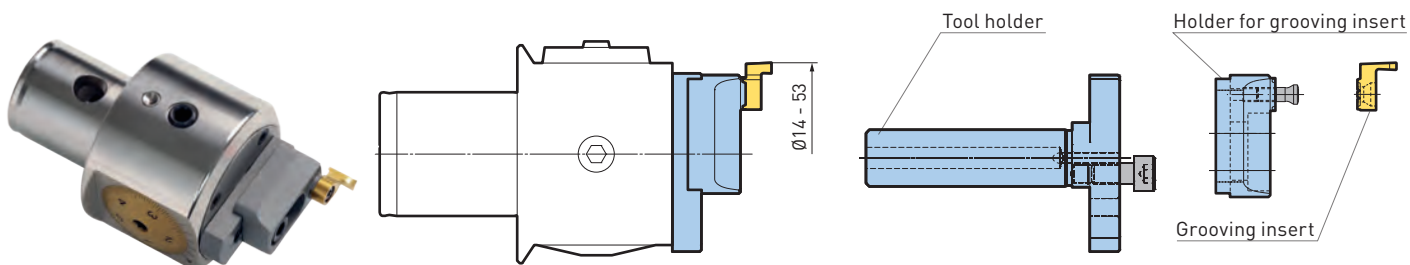


### Face grooving Ø 53 - 3040 mm

With EWN/EWE 53, 68, 100, series 310 and EWN/EWE 200, series 318 and with special insert holders, groove width 2.5 – 4 mm, groove depth 2.7 – 4.3 mm

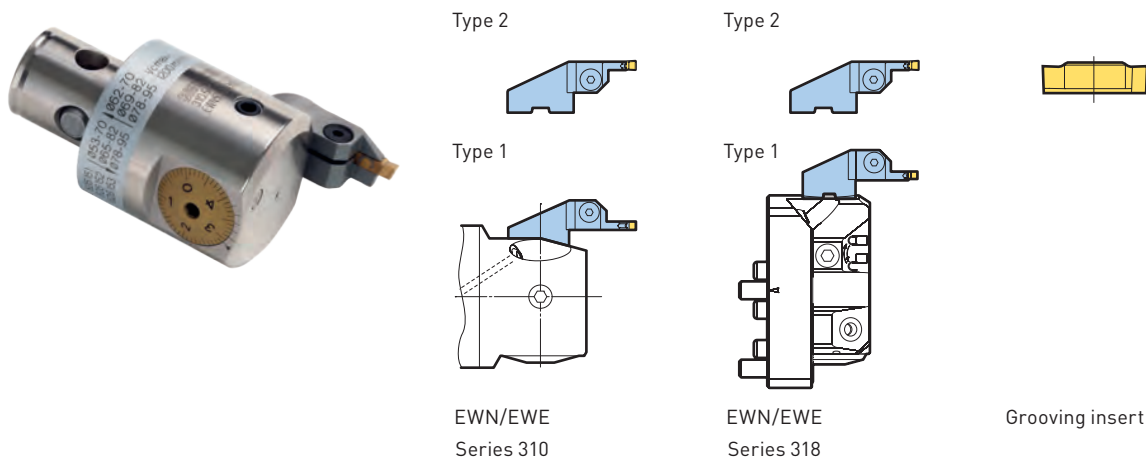

## Groove dimensions

Recommended groove dimensions for given cross section diameters of O-rings, for static sealing.



ØD	Groove Width b	Groove Depth t
1.78	2.5	1.3
2.0	2.5	1.6
2.5	3.3	1.9
2.62	3.5	2.05
3.0	4.0	2.4

## Cutting data

The given data are guide values and have to be adjusted according to the actual working conditions.

Workpiece Material	Vc m/min	fn mm/rev
Construction- heat treatable steels	120 - 200	0.01 - 0.03
Stainless steels	60 - 120	0.01 - 0.02
Cast iron	80 - 160	0.02 - 0.04
Aluminium	200 - 400	0.02 - 0.04
Non-ferrous metals		

### Cutting data for indexable insert drills serie 337 3xD and 4xD, Ø 16-30 mm



Designation	No.	Cutting speed Vc (m/min) <sup>1)</sup>			Feed fn (mm/U) Drill	
		Coolant			Ø 16-20	Ø 21-30
		from outside 3xD / 4xD	through the drill			
St 37	(1.0067)	160 - 200	240 - 280	200 - 240	0.08	0.10
St 60	(1.0062)	140 - 160	220 - 280	180 - 220	0.08	0.10
CK 45	(1.1191)	140 - 160	220 - 280	180 - 220	0.08	0.10
34CrMo4	(1.7220)	120 - 160	180 - 220	160 - 200	0.08	0.10
40CrMnMo7	(1.2311)	100 - 140	160 - 200	140 - 180	0.06	0.08
X210Cr12	(1.2080)	100 - 140	160 - 200	140 - 180	0.05	0.07
X100CrMo13	(1.4108)	100 - 140	160 - 200	140 - 180	0.05	0.07
GG 20 - GG 40		130 - 170	220 - 260	170 - 210	0.10	0.12
GG 60		130 - 170	220 - 260	170 - 210	0.10	0.12
GGG 42		120 - 160	180 - 220	160 - 210	0.08	0.10
Aluminum <sup>2)</sup>		200 - 300	250 - 500	250 - 500	0.06	0.08

<sup>1)</sup> The above cutting data are guide values and apply under normal working conditions when an ample supply of coolant is used.

<sup>2)</sup> Machining of aluminium: In case of unfavourable chipping, interrupt drilling cycle for chip removal.

**Max. drilling depth with flood coolant supply: 1xD**

### Cutting data for indexable insert drills serie 336 2xD and 3xD, Ø 31-74 mm



Designation	No.	Cutting speed Vc (m/min) <sup>1)</sup>		Feed fn (mm/U) Drill	
		Coolant		31.0 - 41.9	≥ 42
		from outside	through the drill		
St 37	(1.0067)	200 - 240	240 - 280	0.10	0.10
St 60	(1.0062)	180 - 220	220 - 280	0.12	0.15
CK 45	(1.1191)	180 - 220	220 - 280	0.12	0.15
34CrMo4	(1.7220)	140 - 180	180 - 220	0.12	0.15
40CrMnMo7	(1.2311)	120 - 160	160 - 200	0.12	0.15
X210Cr12	(1.2080)	120 - 160	160 - 200	0.12	0.15
X100CrMo13	(1.4108)	120 - 160	160 - 200	0.12	0.15
GG 20 - GG 40		150 - 220	220 - 260	0.22	0.25
GG 60		150 - 220	220 - 260	0.22	0.25
GGG 42		140 - 180	180 - 220	0.12	0.15
Aluminum		200 - 300	250 - 500	0.10	0.10

<sup>1)</sup> The above cutting data are guide values and apply under normal working conditions when an ample supply of coolant is used.

**Max. drilling depth with flood coolant supply: 1xD**







With the exception of the diameter range 15 - 22 mm (page 14/15), which is covered by the fine boring heads EW 15 and EW 18, there is cutting data of one specific diameter range on each double page, which corresponds to the size of the rough- and the fine boring head. For the diameter range bigger than 200 mm, the data is valid for light weight boring tools series 318.

The diameter ranges shown in the headline of each page will be reached for rough boring with a second pair of insert holders and for fine boring with additional insert holders size 2 and size 3.

The maximum values of the cutting data given in the tables require spindle speed of 12 500 rpm and spindle power of approx. 20 kW. In case of lower available speeds and spindle power, the cutting data has to be adapted accordingly.

The cutting data is valid for rough boring heads type SW, and for the fine boring heads type EWN, EWB/EBW-UP and EWE. The max. permissible cutting speeds to operate these heads are listed below and may not be exceeded at any time:


Rough boring heads SW:	1200 m/min
Fine boring heads EWN/EWE:	1200 m/min
Balanceable fine boring heads EWB/EBW-UP:	2000 m/min

**In the table the following terms and dimensions are used:**

Workpiece material:	Material no. according to DIN or generally used designation	
Boring depth X:	Projection length according to picture 1 and picture 2	
Insert:	Detailed information about the inserts is shown in the BIG KAISER main catalogue.	
R:	Nose radius	(mm)
Vc:	Cutting speed	(m/min)
Stock allow.:	Stock allowance per cut in Ø	(mm)
fn:	Feed per revolution	(mm/U)
Ra:	Surface roughness (Ra 1.6 µm for N7)	
RSS:	Rotationally symmetrical rough boring	page 7
DVS:	Double offset rough boring	page 7
VPS:	Full profile rough boring	page 8


**Diameter-length ratio**

For long tool assemblies with different boring bar diameters, the boring depth X may not be the decisive factor for the cutting data to be applied, but the total tool length. Should the diameter-length ratio in relation to taper gauge diameter be bigger than 1:6, the lowest cutting data (highest X-value) has to be applied.

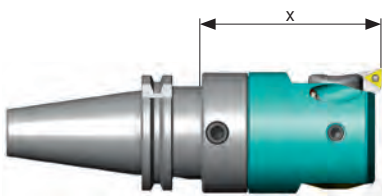


Picture 1

Boring depth X including the useable length of the tool shank and the boring head.

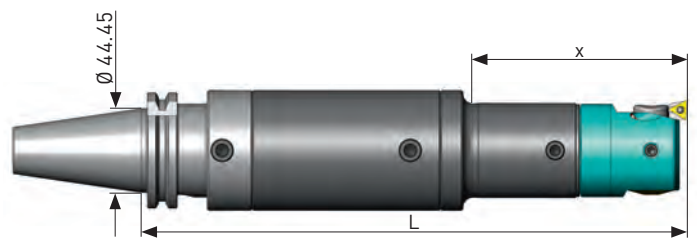


Picture 2

Boring depth X including the useable length of the reduction and the corresponding boring head.

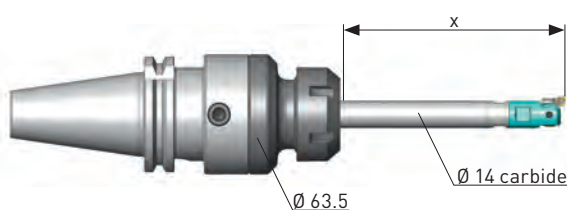

EW 15

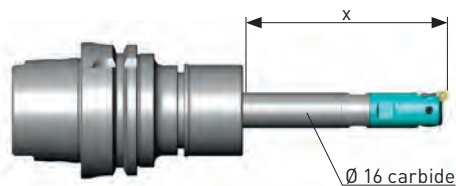


EW 18

Workpiece material	Boring depth X [mm]	Fine boring EW 15						Fine boring EW 18						
		Inserts		Vc	Allow.		Feed	Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
P Steel < 450 N/mm2 1.0037 1.0401 1.0715 Steel 450-850 N/mm2 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06	
	100	655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	180	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06	
	100	655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	180	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	50	655.602	0.2	320	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06	
	60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06	
	80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06	
	100	655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	200	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	150	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	50	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	260	0.2	0.5	0.06
100		655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	190	0.2	0.5	0.06	
120		655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	140	0.2	0.5	0.06	
140		655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
160								655.606	0.1	40	0.1	0.3	0.04	
50		655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	250	0.2	0.5	0.06	
60		655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	250	0.2	0.5	0.06	
80		655.602	0.2	225	0.2	0.5	0.06	655.602	0.2	225	0.2	0.5	0.06	
100		655.602	0.2	160	0.2	0.5	0.06	655.602	0.2	160	0.2	0.5	0.06	
120		655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	120	0.2	0.5	0.06	
140		655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
160								655.606	0.1	40	0.1	0.3	0.04	
K Gray cast iron GG 15 GG 20 GG 25 GG 30		50	655.603	0.2	350	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06
		60	655.603	0.2	310	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06
		80	655.603	0.2	240	0.2	0.5	0.06	655.603	0.2	310	0.2	0.5	0.06
		100	655.603	0.2	180	0.2	0.5	0.06	655.603	0.2	240	0.2	0.5	0.06
	120	655.605	0.1	90	0.1	0.3	0.04	655.603	0.2	180	0.2	0.5	0.06	
	140	655.605	0.1	40	0.1	0.3	0.04	655.605	0.1	100	0.1	0.3	0.04	
160							655.605	0.1	50	0.1	0.3	0.04		


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to mount a fine balanced tool shank.

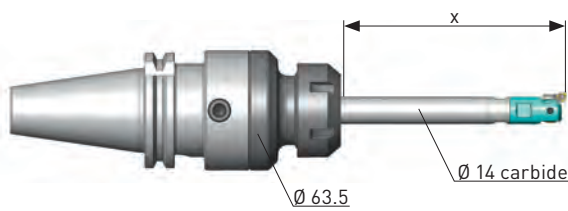

EW 15


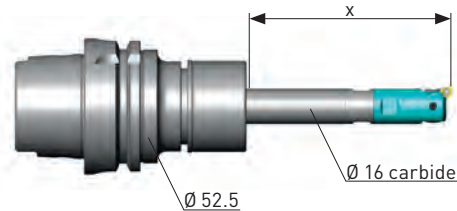


EW 18

Workpiece material	Boring depth X [mm]	Fine boring EW 15						Fine boring EW 18						
		Inserts		Vc	Allow.		Feed	Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	50	655.603	0.2	350	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	60	655.603	0.2	310	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	80	655.603	0.2	240	0.2	0.5	0.06	655.603	0.2	310	0.2	0.5	0.06	
	100	655.603	0.2	180	0.2	0.5	0.06	655.603	0.2	240	0.2	0.5	0.06	
	120	655.605	0.1	90	0.1	0.3	0.04	655.603	0.2	180	0.2	0.5	0.06	
	140	655.605	0.1	40	0.1	0.3	0.04	655.605	0.1	100	0.1	0.3	0.04	
	160							655.605	0.1	50	0.1	0.3	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	50	655.602	0.2	320	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06
		60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06
		80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		100	655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	200	0.2	0.5	0.06
		120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	150	0.2	0.5	0.06
		140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04
		160							655.606	0.1	40	0.1	0.3	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	50	655.601	0.2	550	0.2	0.5	0.06	655.601	0.2	700	0.2	0.5	0.06	
	60	655.601	0.2	550	0.2	0.5	0.06	655.601	0.2	700	0.2	0.5	0.06	
	80	655.601	0.2	400	0.2	0.5	0.06	655.601	0.2	650	0.2	0.5	0.06	
	100	655.601	0.2	300	0.2	0.5	0.06	655.601	0.2	500	0.2	0.5	0.06	
	120	655.601	0.2	150	0.2	0.3	0.06	655.601	0.2	300	0.2	0.5	0.06	
	140	655.604	0.1	70	0.1	0.3	0.04	655.604	0.1	150	0.1	0.3	0.04	
	160							655.604	0.1	70	0.1	0.3	0.04	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06
		60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06
		80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06
		100	655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06
		120	655.602	0.2	100	0.2	0.3	0.06	655.602	0.2	180	0.2	0.5	0.06
		140	655.606	0.1	50	0.1	0.3	0.04	655.606	0.1	100	0.1	0.3	0.04
		160							655.606	0.1	50	0.1	0.3	0.04
S Titanium 3.7164	50	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	60	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	80	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	100	655.602	0.2	80	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	120	655.606	0.1	60	0.1	0.3	0.04	655.602	0.2	80	0.2	0.4	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	60	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	Ni-basic-, Co-basic-, Alloys	50	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		60	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		80	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		100	655.602	0.2	40	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		120	655.606	0.1	30	0.1	0.2	0.04	655.606	0.1	40	0.1	0.2	0.04
		140							655.606	0.1	30	0.1	0.2	0.04
		160												

**Remark:**

The boring heads EW 15 and EW 18 will be screwed on carbide shanks 615.233 / 615.221 and 615.268 / 615.227 / 615.269 / 615.229. For chucking the carbide shanks, we recommend BIG MEGA Chuck collet holders.

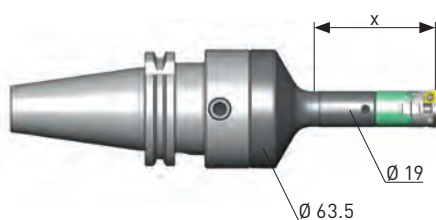



Workpiece material	Boring depth X [mm]	Rough boring SW 20							Fine boring EWN 20						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	65	654.850A	0.4	220	3.00	0.35	5.0	0.18	651.713	0.4	400	0.2	1.0	0.10	
	85	654.850A	0.4	125	2.00	0.30	4.0	0.15	651.738	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	60	1.50	0.25	3.0	0.12	651.838	0.2	100	0.2	0.7	0.06	
	115	654.850A	0.4	220	3.00	0.35	5.0	0.18	651.738	0.3	260	0.2	1.0	0.08	
	150	654.840A	0.2	125	2.00	0.30	4.0	0.15	651.838	0.2	130	0.2	1.0	0.06	
	175	654.840A	0.2	60	1.50	0.25	3.0	0.12	651.824	0.1	60	0.1	0.5	0.04	
	200	654.840A	0.2	25	1.00	0.25	2.0	0.12	651.824	0.1	25	0.1	0.5	0.04	
	65	654.850A	0.4	220	3.00	0.30	5.0	0.15	651.713	0.4	400	0.2	1.0	0.10	
	85	654.850A	0.4	125	2.00	0.25	4.0	0.12	651.738	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	60	1.50	0.25	3.0	0.12	651.838	0.2	100	0.2	0.7	0.06	
	115	654.850A	0.4	220	3.00	0.30	5.0	0.15	651.738	0.3	260	0.2	1.0	0.08	
	150	654.840A	0.2	125	2.00	0.25	4.0	0.12	651.838	0.2	130	0.2	1.0	0.06	
	175	654.840A	0.2	60	1.50	0.25	3.0	0.12	651.824	0.1	60	0.1	0.5	0.04	
	200	654.840A	0.2	25	1.00	0.25	2.0	0.12	651.824	0.1	25	0.1	0.5	0.04	
	65	654.856	0.4	180	2.50	0.25	4.0	0.15	651.734	0.4	320	0.2	0.8	0.10	
	85	654.856	0.4	100	2.00	0.20	3.5	0.12	651.737	0.3	250	0.2	0.6	0.08	
	100	654.846	0.2	60	1.50	0.20	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06	
	115	654.856	0.4	180	2.50	0.25	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08	
	150	654.846	0.2	120	2.00	0.20	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06	
	175	654.846	0.2	60	1.50	0.20	2.5	0.12	651.824	0.1	60	0.1	0.3	0.04	
	200	654.846	0.2	25	1.00	0.20	2.0	0.12	651.824	0.1	25	0.1	0.3	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	65	654.856	0.4	180	2.50	0.30	4.0	0.15	651.737	0.3	320	0.2	0.8	0.08
		85	654.856	0.4	100	2.00	0.25	3.5	0.12	651.837	0.2	250	0.2	0.6	0.06
		100	654.846	0.2	60	1.50	0.25	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06
115		654.856	0.4	180	2.50	0.30	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08	
150		654.846	0.2	120	2.00	0.25	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06	
175		654.846	0.2	60	1.50	0.25	2.5	0.12	651.824	0.1	60	0.1	0.3	0.04	
200		654.846	0.2	25	1.00	0.25	2.0	0.12	651.824	0.1	25	0.1	0.3	0.04	
65		654.856	0.4	150	2.50	0.30	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08	
85		654.856	0.4	90	2.00	0.25	3.5	0.12	651.837	0.2	200	0.2	0.6	0.06	
100		654.846	0.2	60	1.50	0.25	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06	
115		654.856	0.4	150	2.50	0.30	4.0	0.15	651.737	0.3	230	0.2	0.8	0.08	
150		654.846	0.2	100	2.00	0.25	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06	
175	654.846	0.2	60	1.50	0.25	2.5	0.12	651.824	0.1	60	0.1	0.3	0.04		
200	654.846	0.2	25	1.00	0.25	2.0	0.12	651.824	0.1	25	0.1	0.3	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	65	654.852	0.4	220	4.00	0.30	7.0	0.15	651.734	0.4	350	0.2	1.2	0.10	
	85	654.852	0.4	140	3.50	0.30	6.0	0.15	651.735	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	60	3.00	0.25	5.0	0.12	651.834	0.2	100	0.2	0.7	0.06	
	115	654.852	0.4	220	4.00	0.30	7.0	0.15	651.734	0.4	280	0.2	1.0	0.10	
	150	654.840A	0.2	140	3.50	0.30	6.0	0.15	651.834	0.2	150	0.2	0.8	0.06	
	175	654.840A	0.2	60	3.00	0.25	4.0	0.12	651.824	0.1	60	0.1	0.7	0.04	
	200	654.840A	0.2	25	2.00	0.25	3.0	0.12	651.824	0.1	25	0.1	0.6	0.04	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to mount a fine balanced tool shank with index "F", e.g. 324.312F.



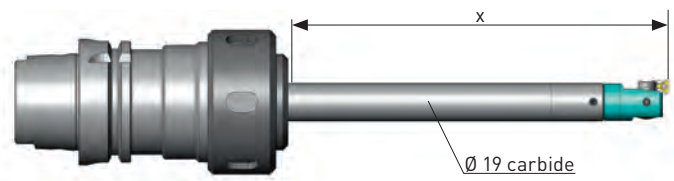

Workpiece material	Boring depth X [mm]	Rough boring SW 20							Fine boring EWN 20						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
K GGG < 500 N/mm2 GGG 40 GGG 50	65	654.852	0.4	220	3.50	0.30	6.0	0.15	651.734	0.4	350	0.2	1.00	0.10	
	85	654.852	0.4	140	3.00	0.30	5.0	0.15	651.735	0.3	260	0.2	0.80	0.08	
	100	654.840A	0.2	60	2.50	0.25	4.0	0.12	651.834	0.2	100	0.2	0.70	0.06	
	115	654.852	0.4	220	3.50	0.30	6.0	0.15	651.734	0.4	280	0.2	1.00	0.10	
	150	654.840A	0.2	140	3.00	0.30	5.0	0.15	651.834	0.2	150	0.2	1.00	0.06	
	175	654.840A	0.2	60	2.50	0.25	4.0	0.12	651.824	0.1	60	0.1	0.50	0.04	
	200	654.840A	0.2	25	2.00	0.25	3.0	0.12	651.824	0.1	25	0.1	0.50	0.04	
	GGG < 800 N/mm2 GGG 60 GGG 70 GGG 80	65	654.856	0.4	180	2.50	0.25	4.0	0.15	651.734	0.4	320	0.2	0.80	0.10
		85	654.856	0.4	100	2.00	0.20	3.5	0.12	651.737	0.3	250	0.2	0.60	0.08
		100	654.846	0.2	60	1.50	0.20	2.5	0.12	651.837	0.2	100	0.2	0.50	0.06
		115	654.856	0.4	180	2.50	0.25	4.0	0.15	651.737	0.3	250	0.2	0.80	0.08
		150	654.846	0.2	120	2.00	0.20	3.5	0.12	651.837	0.2	130	0.2	0.60	0.06
		175	654.846	0.2	60	1.50	0.20	2.5	0.12	651.824	0.1	60	0.1	0.30	0.04
	N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	65	654.888	0.4	350	3.00	0.30	6.0	0.15	651.723	0.3	650	0.2	1.20	0.08
85		654.888	0.4	200	3.00	0.30	5.0	0.15	651.723	0.3	350	0.2	1.00	0.08	
100		654.877	0.2	100	2.00	0.25	4.0	0.12	651.825	0.2	120	0.2	0.70	0.06	
115		654.888	0.4	350	3.00	0.30	6.0	0.15	651.723	0.3	450	0.2	1.20	0.08	
150		654.888	0.4	220	3.00	0.30	5.0	0.15	651.723	0.3	240	0.2	1.00	0.08	
175		654.877	0.2	100	2.00	0.25	4.0	0.12	651.823	0.1	150	0.1	0.90	0.04	
200		654.877	0.2	50	2.00	0.25	3.0	0.12	651.823	0.1	60	0.1	0.80	0.04	
Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg		65	654.889	0.4	250	3.00	0.30	6.0	0.15	651.737	0.3	650	0.2	1.20	0.08
		85	654.889	0.4	200	3.00	0.30	5.0	0.15	651.737	0.3	350	0.2	1.00	0.08
		100	654.879	0.2	100	2.00	0.25	4.0	0.12	651.837	0.2	120	0.2	0.70	0.06
		115	654.889	0.4	250	3.00	0.30	6.0	0.15	651.737	0.3	450	0.2	1.20	0.08
		150	654.889	0.4	220	3.00	0.30	5.0	0.15	651.737	0.3	240	0.2	1.00	0.08
		175	654.879	0.2	100	2.00	0.25	4.0	0.12	651.824	0.1	150	0.1	0.90	0.04
S Titanium 3.7164		65	654.847	0.4	120	3.00	0.25	5.0	0.12	651.737	0.3	120	0.2	1.00	0.08
	85	654.847	0.4	80	2.00	0.20	3.5	0.10	651.837	0.2	80	0.2	0.80	0.06	
	115	654.847	0.4	120	3.00	0.25	5.0	0.12	651.737	0.3	120	0.2	1.00	0.08	
	150	654.847	0.4	120	2.00	0.20	3.5	0.10	651.837	0.2	70	0.2	0.80	0.06	
	175	654.837	0.2	80	2.00	0.20	3.0	0.10	651.824	0.1	40	0.1	0.50	0.04	
	Ni-basic-, Co-basic-, Alloys	65	654.847	0.4	50	3.00	0.20	4.0	0.10	651.839	0.2	50	0.1	0.50	0.06
		85	654.837	0.2	30	2.00	0.15	3.0	0.10	651.839	0.2	30	0.1	0.50	0.06
		115	654.847	0.4	50	3.00	0.20	4.0	0.10	651.839	0.2	40	0.1	0.50	0.06
		150	654.837	0.2	30	2.00	0.15	3.0	0.10	651.839	0.2	25	0.1	0.50	0.06



**Remark:**

For a cost effective high volume production with boring depth X of 115 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.417 for the range Ø 25 - 31 mm.
- Fine Boring: Insert holder size 2, 626.112 for the range Ø 25 - 31 mm, insert holder size 3, 626.113 for the range Ø 30 - 36 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 15%, and by 30% when using insert holder size 3.

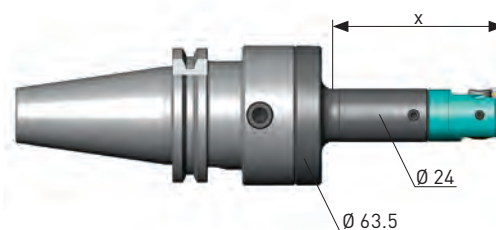
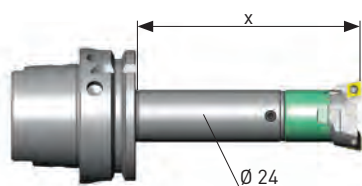


Workpiece material	Boring depth X [mm]	Rough boring SW 25							Fine boring EWN/EWB 25							
		Inserts		Vc	RSS		DVS		Inserts	Vc	Allow.		Feed			
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U			Std. val.	Max.		Ra 1.6 µm		
P	Steel < 450 N/mm <sup>2</sup>	80	654.850A	0.4	220	3.5	0.35	6.0	0.18	651.713	0.4	400	0.2	1.2	0.10	
		100	654.850A	0.4	125	2.5	0.30	5.0	0.15	651.738	0.3	140	0.2	1.0	0.08	
		125	654.840A	0.2	60	2.0	0.25	4.0	0.12	651.838	0.2	100	0.2	0.8	0.06	
		1.0037	130	654.850A	0.4	200	3.5	0.35	5.0	0.18	651.713	0.4	260	0.2	1.2	0.10
		1.0401	175	654.840A	0.2	100	2.5	0.30	4.0	0.15	651.838	0.2	130	0.2	1.0	0.06
		1.0715	200	654.840A	0.2	60	2.0	0.25	3.0	0.12	651.838	0.2	60	0.1	0.8	0.06
		250	654.840A	0.2	25	1.5	0.25	2.0	0.12	651.824	0.1	25	0.1	0.7	0.04	
		Steel 450-850 N/mm <sup>2</sup>	80	654.850A	0.4	220	3.5	0.30	6.0	0.15	651.713	0.4	400	0.2	1.2	0.10
	100		654.850A	0.4	125	2.5	0.25	5.0	0.12	651.738	0.3	140	0.2	1.0	0.08	
	1.0050		125	654.840A	0.2	60	2.0	0.25	4.0	0.12	651.838	0.2	100	0.2	0.8	0.06
	1.0503		130	654.850A	0.4	200	3.5	0.30	5.0	0.15	651.713	0.4	260	0.2	1.2	0.10
	1.1141		175	654.840A	0.2	100	2.5	0.25	4.0	0.12	651.838	0.2	130	0.2	1.0	0.06
	1.1191		200	654.840A	0.2	60	2.0	0.25	3.0	0.12	651.838	0.2	60	0.1	0.8	0.06
	1.5752		250	654.840A	0.2	25	1.5	0.25	2.0	0.12	651.824	0.1	25	0.1	0.7	0.04
	Steel 850-1200 N/mm <sup>2</sup>		80	654.856	0.4	180	3.0	0.30	5.0	0.15	651.734	0.4	320	0.2	1.0	0.10
		100	654.856	0.4	100	2.5	0.25	4.0	0.12	651.737	0.3	140	0.2	0.8	0.08	
		1.2083	125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06
		1.2294	130	654.856	0.4	160	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08
		1.2312	175	654.846	0.2	90	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06
		1.2344	200	654.846	0.2	60	2.0	0.25	3.0	0.12	651.824	0.1	60	0.1	0.6	0.04
		1.2764	250	654.846	0.2	25	1.5	0.25	2.0	0.12	651.824	0.1	25	0.1	0.5	0.04
		M	Stainless steels, ferritic, martensitic	80	654.856	0.4	180	3.0	0.30	5.0	0.15	651.737	0.3	320	0.2	1.0
	100			654.856	0.4	100	2.5	0.25	4.0	0.12	651.837	0.2	140	0.2	0.8	0.06
	1.4016			125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6
1.4024	130			654.856	0.4	160	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08
1.4034	175			654.846	0.2	90	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06
1.4762	200			654.846	0.2	60	2.0	0.25	3.0	0.12	651.824	0.1	60	0.1	0.6	0.04
Stainless steels, austenitic	80		654.856	0.4	150	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08	
	100		654.856	0.4	100	2.5	0.25	4.0	0.12	651.837	0.2	140	0.2	0.8	0.06	
	1.4301		125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06
	1.4311		130	654.856	0.4	150	3.0	0.30	5.0	0.15	651.737	0.3	230	0.2	1.0	0.08
	1.4401		175	654.846	0.2	90	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06
	1.4435		200	654.846	0.2	60	2.0	0.25	3.0	0.12	651.824	0.1	60	0.1	0.6	0.04
K	Gray cast iron	80	654.852	0.4	220	5.0	0.30	8.0	0.15	651.734	0.4	350	0.2	1.2	0.10	
		100	654.852	0.4	140	4.0	0.30	7.0	0.15	651.632	0.3	140	0.2	1.0	0.08	
	GG 15	125	654.840A	0.2	60	3.0	0.25	6.0	0.12	651.834	0.2	100	0.2	0.8	0.06	
	GG 20	130	654.852	0.4	220	5.0	0.30	8.0	0.15	651.735	0.3	280	0.2	1.2	0.08	
	GG 25	175	654.840A	0.2	100	4.0	0.30	7.0	0.15	651.834	0.2	150	0.2	1.0	0.06	
	GG 30	200	654.840A	0.2	60	3.0	0.25	5.0	0.12	651.824	0.1	70	0.1	0.8	0.04	
	250	654.840A	0.2	25	2.0	0.25	4.0	0.12	651.824	0.1	25	0.1	0.7	0.04		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 309.201 and 324.322F.

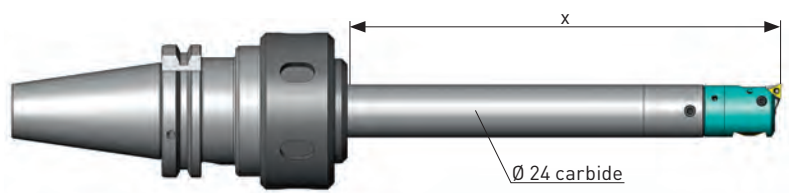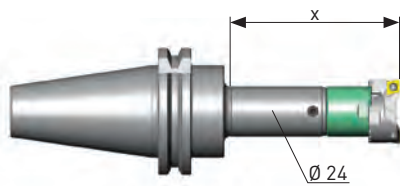

Workpiece material	Boring depth X [mm]	Rough boring SW 25							Fine boring EWN/EWB 25					
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U	
K GGG < 500 N/mm2 GGG 40 GGG 50	80	654.852	0.4	220	4.00	0.30	7.0	0.15	651.734	0.4	350	0.2	1.2	0.10
	100	654.852	0.4	140	3.50	0.30	6.0	0.15	651.735	0.3	140	0.2	1.0	0.08
	125	654.840A	0.2	60	3.00	0.25	5.0	0.12	651.834	0.2	100	0.2	0.8	0.06
	130	654.852	0.4	220	4.00	0.30	7.0	0.15	651.735	0.3	280	0.2	1.2	0.08
	175	654.840A	0.2	100	3.50	0.30	6.0	0.15	651.834	0.2	150	0.2	1.0	0.06
	200	654.840A	0.2	60	3.00	0.25	5.0	0.12	651.824	0.1	70	0.1	0.8	0.04
	250	654.840A	0.2	25	2.00	0.25	4.0	0.12	651.824	0.1	25	0.1	0.7	0.04
	80	654.856	0.4	180	3.00	0.30	5.0	0.15	651.734	0.4	320	0.2	1.0	0.10
	100	654.856	0.4	100	2.50	0.25	4.0	0.12	651.737	0.3	140	0.2	0.8	0.08
	125	654.846	0.2	60	2.00	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06
	130	654.856	0.4	160	3.00	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08
	175	654.846	0.2	90	2.50	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06
	200	654.846	0.2	60	2.00	0.25	3.0	0.12	651.824	0.1	60	0.1	0.6	0.04
	250	654.846	0.2	25	1.50	0.25	2.0	0.12	651.824	0.1	25	0.1	0.5	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.888	0.4	420	4.00	0.30	7.0	0.15	651.723	0.3	750	0.2	1.2	0.08
	100	654.888	0.4	200	3.00	0.30	6.0	0.15	651.723	0.3	200	0.2	1.2	0.08
	125	654.877	0.2	90	2.00	0.25	4.0	0.12	651.825	0.2	120	0.2	1.0	0.06
	130	654.888	0.4	420	4.00	0.30	7.0	0.15	651.723	0.3	450	0.2	1.2	0.08
	175	654.888	0.4	200	3.00	0.30	6.0	0.15	651.723	0.3	240	0.2	1.2	0.08
	200	654.877	0.2	100	2.00	0.25	4.0	0.12	651.825	0.2	150	0.2	1.0	0.06
	250	654.877	0.2	50	2.00	0.25	4.0	0.12	651.823	0.1	60	0.1	0.8	0.04
	80	654.889	0.4	320	4.00	0.30	7.0	0.15	651.737	0.3	650	0.2	1.2	0.08
	100	654.889	0.4	200	3.00	0.30	6.0	0.15	651.737	0.3	200	0.2	1.2	0.08
	125	654.879	0.2	90	2.00	0.25	4.0	0.12	651.837	0.2	120	0.2	1.0	0.06
S Titanium 3.7164	130	654.889	0.4	320	4.00	0.30	7.0	0.15	651.737	0.3	450	0.2	1.2	0.08
	175	654.889	0.4	200	3.00	0.30	6.0	0.15	651.737	0.3	240	0.2	1.2	0.08
	200	654.879	0.2	100	2.00	0.25	4.0	0.12	651.837	0.2	150	0.2	1.0	0.06
	250	654.879	0.2	50	2.00	0.25	4.0	0.12	651.824	0.1	60	0.1	0.8	0.04
	80	654.847	0.4	120	3.50	0.25	5.5	0.12	651.737	0.3	120	0.2	1.2	0.08
	100	654.847	0.4	80	2.50	0.20	4.0	0.10	651.837	0.2	80	0.2	1.0	0.06
S Ni-basic-, Co-basic-, Alloys	130	654.847	0.4	120	3.50	0.25	5.5	0.12	651.737	0.3	120	0.2	1.2	0.08
	175	654.847	0.4	120	2.50	0.20	4.0	0.10	651.837	0.2	70	0.1	1.0	0.06
	200	654.837	0.2	80	2.00	0.20	3.0	0.10	651.824	0.1	40	0.1	0.8	0.04
	80	654.847	0.4	50	3.00	0.20	4.0	0.10	651.839	0.2	50	0.2	0.8	0.06
	100	654.837	0.2	30	2.00	0.15	3.0	0.10	651.839	0.2	30	0.1	0.8	0.06
130	654.847	0.4	50	3.00	0.20	4.0	0.10	651.839	0.2	40	0.1	0.6	0.06	
175	654.837	0.2	30	2.00	0.15	3.0	0.10	651.839	0.2	25	0.1	0.6	0.06	



**Remark:**

For a cost effective high volume production with boring depth X of 130 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.427 for the range Ø 32 - 40 mm
- Fine Boring: Insert holder size 2, 626.122 for the range Ø 32 - 40 mm, insert holder size 3, 626.123 for the range Ø 39 - 47 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 15%, and by 30% when using insert holder size 3.

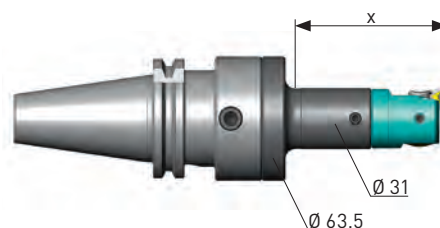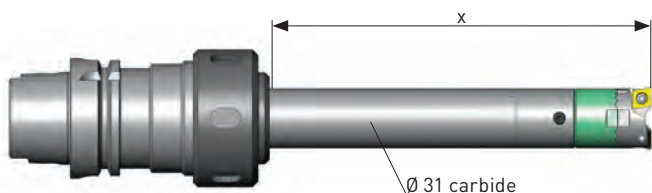



Workpiece material	Boring depth X [mm]	Rough boring SW 32							Fine boring EWN/EWB 32						
		Inserts		Vc	RSS		DVS		Inserts	Vc	Allow.		Feed		
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U			Std. val. mm/Ø	Max. mm/Ø		Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	80	654.950	0.8	240	4.50	0.40	8.00	0.20	655.385	0.4	400	0.2	1.2	0.10	
	110	654.940A	0.4	240	4.50	0.35	7.50	0.20	655.385	0.4	260	0.2	1.2	0.10	
	130	654.940A	0.4	160	4.00	0.30	7.00	0.17	655.375	0.2	160	0.2	1.0	0.06	
	160	654.930A	0.2	80	3.50	0.30	5.50	0.15	655.375	0.2	80	0.2	0.8	0.06	
	190	654.940A	0.4	120	3.00	0.30	4.50	0.15	655.375	0.2	150	0.2	1.2	0.06	
	230	654.930A	0.2	70	2.00	0.25	3.50	0.12	655.363	0.1	80	0.1	0.9	0.04	
	275	654.930A	0.2	25	1.50	0.25	3.00	0.12	655.363	0.1	25	0.1	0.7	0.04	
	80	654.950	0.8	220	4.50	0.35	8.00	0.17	655.385	0.4	400	0.2	1.2	0.10	
	110	654.940A	0.4	220	4.50	0.30	7.50	0.17	655.385	0.4	260	0.2	1.2	0.10	
	130	654.940A	0.4	160	4.00	0.30	7.00	0.15	655.375	0.2	160	0.2	1.0	0.06	
	160	654.930A	0.2	80	3.50	0.30	5.50	0.12	655.375	0.2	80	0.2	0.8	0.06	
	190	654.940A	0.4	120	3.00	0.25	4.50	0.15	655.375	0.2	150	0.2	1.2	0.06	
	230	654.930A	0.2	70	2.00	0.25	3.50	0.12	655.363	0.1	80	0.1	0.9	0.04	
	275	654.930A	0.2	25	1.50	0.25	3.00	0.12	655.363	0.1	25	0.1	0.7	0.04	
	80	654.955	0.8	200	4.00	0.35	7.50	0.17	655.318	0.4	320	0.2	1.0	0.10	
	110	654.945	0.4	180	4.00	0.30	7.00	0.17	655.318	0.4	240	0.2	1.0	0.10	
	130	654.945	0.4	140	3.50	0.30	6.00	0.15	655.319	0.2	150	0.2	0.8	0.06	
	160	654.935	0.2	80	3.00	0.30	5.00	0.15	655.319	0.2	70	0.2	0.6	0.06	
	190	654.945	0.4	100	2.50	0.25	4.00	0.12	655.319	0.2	140	0.2	1.0	0.06	
	230	654.935	0.2	70	2.00	0.25	3.50	0.12	655.369	0.1	70	0.1	0.7	0.04	
	275	654.935	0.2	25	1.50	0.25	3.00	0.12	655.369	0.1	25	0.1	0.6	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	80	654.955	0.8	200	4.00	0.35	7.50	0.17	655.318	0.4	320	0.2	1.0	0.10
		110	654.945	0.4	180	4.00	0.30	7.00	0.17	655.318	0.4	240	0.2	1.0	0.10
		130	654.945	0.4	140	3.50	0.30	6.00	0.15	655.319	0.2	150	0.2	0.8	0.06
160		654.935	0.2	80	3.00	0.30	5.00	0.15	655.319	0.2	70	0.2	0.6	0.06	
190		654.945	0.4	100	2.50	0.25	4.00	0.12	655.319	0.2	140	0.2	1.0	0.06	
230		654.935	0.2	70	2.00	0.25	3.50	0.12	655.369	0.1	70	0.1	0.7	0.04	
275		654.935	0.2	25	1.50	0.25	3.00	0.12	655.369	0.1	25	0.1	0.6	0.04	
80		654.955	0.8	160	4.00	0.35	7.00	0.17	655.318	0.4	280	0.2	1.0	0.10	
110		654.945	0.4	140	4.00	0.30	6.50	0.17	655.318	0.4	220	0.2	1.0	0.10	
130		654.945	0.4	110	3.50	0.30	6.00	0.15	655.319	0.2	150	0.2	0.8	0.06	
160		654.935	0.2	70	3.00	0.30	5.00	0.15	655.319	0.2	70	0.2	0.6	0.06	
190		654.945	0.4	90	2.50	0.25	4.00	0.12	655.319	0.2	140	0.2	1.0	0.06	
230	654.935	0.2	60	2.00	0.25	3.50	0.12	655.369	0.1	70	0.1	0.7	0.04		
275	654.935	0.2	25	1.50	0.25	3.00	0.12	655.369	0.1	25	0.1	0.6	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	80	654.952	0.8	240	7.00	0.40	10.00	0.20	655.393	0.8	350	0.2	1.3	0.14	
	110	654.942	0.4	240	6.00	0.35	9.00	0.18	655.383	0.4	300	0.2	1.3	0.10	
	130	654.942	0.4	160	5.50	0.30	8.00	0.15	655.383	0.4	160	0.2	1.1	0.10	
	160	654.935	0.2	80	5.00	0.25	7.00	0.12	655.373	0.2	70	0.2	0.8	0.06	
	190	654.942	0.4	130	4.50	0.25	6.00	0.12	655.383	0.4	150	0.2	1.2	0.10	
	230	654.935	0.2	70	3.50	0.25	5.00	0.12	655.373	0.2	70	0.1	1.0	0.06	
275	654.935	0.2	25	2.50	0.25	4.00	0.12	655.363	0.1	25	0.1	0.7	0.04		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 309.301 and 324.331F.





Workpiece material	Boring depth X [mm]	Rough boring SW 32							Fine boring EWN/EWB 32						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm2 GGG 40 GGG 50	80	654.952	0.8	220	7.00	0.40	10.00	0.20	655.393	0.8	350	0.2	1.2	0.14	
	110	654.942	0.4	220	6.00	0.35	9.00	0.18	655.383	0.4	300	0.2	1.2	0.10	
	130	654.942	0.4	150	5.50	0.30	8.00	0.15	655.383	0.4	160	0.2	1.0	0.10	
	160	654.935	0.2	80	5.00	0.25	7.00	0.12	655.373	0.2	70	0.2	0.7	0.06	
	190	654.942	0.4	120	4.50	0.25	6.00	0.12	655.383	0.4	150	0.2	1.2	0.10	
	230	654.935	0.2	70	3.50	0.25	5.00	0.12	655.373	0.2	70	0.1	0.9	0.06	
	275	654.935	0.2	25	2.50	0.25	4.00	0.12	655.363	0.1	25	0.1	0.7	0.04	
	GGG < 800 N/mm2 GGG 60 GGG 70 GGG 80	80	654.955	0.8	200	4.50	0.35	8.00	0.17	655.318	0.4	320	0.2	1.0	0.10
		110	654.945	0.4	180	4.50	0.30	7.00	0.17	655.318	0.4	240	0.2	1.0	0.10
		130	654.945	0.4	140	4.00	0.30	6.00	0.15	655.319	0.2	150	0.2	0.8	0.06
		160	654.935	0.2	80	3.50	0.30	5.00	0.15	655.319	0.2	70	0.2	0.6	0.06
		190	654.945	0.4	100	3.00	0.25	4.00	0.12	655.319	0.2	140	0.2	1.0	0.06
		230	654.935	0.2	70	2.00	0.25	3.50	0.12	655.369	0.1	70	0.1	0.7	0.04
		275	654.935	0.2	25	1.50	0.25	3.00	0.12	655.369	0.1	25	0.1	0.6	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.987	0.8	750	6.00	0.40	9.00	0.20	655.398	0.8	850	0.2	1.5	0.14	
	110	654.987	0.8	400	5.50	0.40	8.00	0.20	655.398	0.8	400	0.2	1.5	0.14	
	130	654.987	0.8	260	5.00	0.40	7.00	0.20	655.388	0.4	280	0.2	1.2	0.10	
	160	654.977	0.4	120	4.00	0.30	7.00	0.17	655.378	0.2	140	0.2	1.0	0.06	
	190	654.987	0.8	180	4.00	0.30	6.00	0.17	655.388	0.4	220	0.2	1.2	0.10	
	230	654.977	0.4	60	3.00	0.25	5.00	0.12	655.378	0.2	80	0.1	1.0	0.06	
	275	654.977	0.4	25	2.00	0.25	4.00	0.12	655.378	0.2	50	0.1	0.8	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	80	654.959	0.8	550	6.00	0.40	9.00	0.20	655.320	0.8	650	0.2	1.5	0.14
		110	654.959	0.8	380	5.50	0.40	8.00	0.20	655.320	0.8	400	0.2	1.5	0.14
		130	654.959	0.8	260	5.00	0.40	7.00	0.20	655.318	0.4	280	0.2	1.2	0.10
		160	654.949	0.4	120	4.00	0.30	7.00	0.17	655.319	0.2	140	0.2	1.0	0.06
		190	654.959	0.8	180	4.00	0.30	6.00	0.17	655.318	0.4	220	0.2	1.2	0.10
		230	654.949	0.4	60	3.00	0.25	5.00	0.12	655.319	0.2	80	0.1	1.0	0.06
		275	654.949	0.4	25	2.00	0.25	4.00	0.12	655.369	0.1	50	0.1	0.8	0.04
S Titanium 3.7164	80	654.957	0.8	120	4.00	0.35	7.00	0.17	655.318	0.4	120	0.2	1.2	0.10	
	110	654.957	0.8	120	4.00	0.35	7.00	0.17	655.318	0.4	120	0.2	1.2	0.10	
	130	654.947	0.4	90	3.50	0.30	6.00	0.15	655.319	0.2	120	0.2	1.0	0.06	
	160	654.947	0.4	60	3.00	0.25	5.00	0.12	655.319	0.2	80	0.2	0.8	0.06	
	190	654.947	0.4	90	3.00	0.25	5.00	0.12	655.319	0.2	120	0.2	1.2	0.06	
	230	654.947	0.4	60	2.50	0.25	4.00	0.12	655.369	0.1	70	0.1	0.9	0.04	
	275	654.937	0.2	25	2.00	0.20	3.00	0.12	655.369	0.1	40	0.1	0.7	0.04	
	Ni-basic-, Co-basic-, Alloys	80	654.957	0.8	50	3.50	0.30	6.00	0.15	655.326	0.4	50	0.2	0.8	0.10
		110	654.947	0.4	35	3.00	0.30	5.00	0.15	655.326	0.4	50	0.2	0.8	0.10
		130	654.947	0.4	35	2.50	0.25	4.50	0.12	655.316	0.2	40	0.1	0.8	0.06
		160	654.937	0.2	30	2.00	0.20	4.00	0.10	655.316	0.2	30	0.1	0.6	0.06
		190	654.947	0.4	30	2.00	0.20	4.00	0.10	655.316	0.2	40	0.1	0.6	0.06
		230	654.937	0.2	30	2.00	0.20	3.00	0.10	655.316	0.2	25	0.1	0.6	0.06
		275													



**Remark:**

For a cost effective high volume production with boring depth X of 190 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.437 for the range Ø 41 - 51 mm
- Fine Boring: Insert holder size 2, 626.132 for the range Ø 41 - 51mm, insert holder size 3, 626.133 for the range Ø 50 - 60 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 10%, and by 20% when using insert holder size 3.

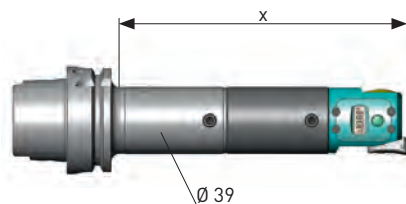



Workpiece material	Boring depth X [mm]	Rough boring SW 41							Fine boring EWN/EWE/EWB 41						
		Inserts		Vc	RSS		DVS		Inserts	Vc	Allow.		Feed		
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U			Std. val.	Max.		Ra 1.6 µm	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	80	654.950	0.8	240	6.00	0.50	10.00	0.25	655.334	0.8	450	0.2	2.5	0.14	
	115	654.940A	0.4	240	5.50	0.45	9.00	0.25	655.324	0.4	280	0.2	2.0	0.10	
	140	654.940A	0.4	170	5.00	0.45	8.50	0.25	655.324	0.4	180	0.2	2.0	0.10	
	160	654.940A	0.4	125	4.50	0.40	8.00	0.20	655.375	0.2	125	0.2	1.5	0.06	
	175	654.940A	0.4	90	4.00	0.30	7.50	0.15	655.375	0.2	100	0.2	1.5	0.06	
	200	654.930A	0.2	60	3.50	0.30	7.00	0.15	655.375	0.2	55	0.1	0.9	0.06	
	260	654.930A	0.2	150	3.50	0.30	6.00	0.15	655.324	0.4	200	0.2	0.9	0.10	
	80	654.950	0.8	220	6.00	0.45	10.00	0.22	655.334	0.8	450	0.2	2.5	0.14	
	115	654.940A	0.4	220	5.50	0.40	9.00	0.20	655.324	0.4	280	0.2	2.0	0.10	
	140	654.940A	0.4	170	5.00	0.40	8.50	0.20	655.324	0.4	180	0.2	2.0	0.10	
	160	654.940A	0.4	125	4.50	0.35	8.00	0.17	655.375	0.2	125	0.2	1.5	0.06	
	175	654.940A	0.4	90	4.00	0.25	7.50	0.15	655.375	0.2	100	0.2	1.5	0.06	
	200	654.930A	0.2	60	3.50	0.25	7.00	0.15	655.375	0.2	55	0.1	0.9	0.06	
	260	654.930A	0.2	150	3.50	0.25	6.00	0.15	655.324	0.4	200	0.2	0.9	0.10	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	80	654.955	0.8	200	5.50	0.45	9.00	0.22	655.320	0.8	350	0.2	2.2	0.14
		115	654.945	0.4	180	5.00	0.40	8.50	0.20	655.318	0.4	260	0.2	1.8	0.10
		140	654.945	0.4	150	4.50	0.40	8.00	0.20	655.318	0.4	170	0.2	1.8	0.10
		160	654.945	0.4	120	4.00	0.35	7.50	0.17	655.319	0.2	125	0.2	1.2	0.06
		175	654.945	0.4	90	3.50	0.25	7.00	0.15	655.319	0.2	100	0.2	1.2	0.06
		200	654.935	0.2	60	3.00	0.25	6.00	0.15	655.319	0.2	55	0.1	0.7	0.06
		260	654.935	0.2	150	3.00	0.25	6.00	0.15	655.318	0.4	150	0.2	0.7	0.10
		80	654.955	0.8	160	5.50	0.45	9.00	0.22	655.320	0.8	280	0.2	2.2	0.14
		115	654.945	0.4	140	5.00	0.40	8.50	0.20	655.318	0.4	250	0.2	1.8	0.10
		140	654.945	0.4	140	4.50	0.40	8.00	0.20	655.318	0.4	160	0.2	1.8	0.10
160		654.945	0.4	110	4.00	0.35	7.50	0.17	655.319	0.2	125	0.2	1.2	0.06	
175		654.945	0.4	90	3.50	0.25	7.00	0.15	655.319	0.2	100	0.2	1.2	0.06	
200	654.935	0.2	60	3.00	0.25	6.00	0.15	655.319	0.2	55	0.1	0.7	0.06		
260	654.935	0.2	150	3.00	0.25	6.00	0.15	655.318	0.4	170	0.2	0.7	0.10		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	80	654.952	0.8	240	9.00	0.50	15.00	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	115	654.952	0.8	240	9.00	0.50	15.00	0.25	655.303A	0.8	300	0.2	2.5	0.14	
	140	654.942	0.4	170	8.50	0.40	14.00	0.2	655.302A	0.4	180	0.2	2.0	0.10	
	160	654.942	0.4	125	8.00	0.40	12.00	0.2	655.302A	0.4	125	0.2	2.0	0.10	
	175	654.942	0.4	90	7.00	0.30	10.00	0.15	655.301A	0.2	100	0.2	1.5	0.06	
	200	654.935	0.2	60	6.00	0.30	9.00	0.15	655.301A	0.2	55	0.1	0.9	0.06	
260	654.935	0.2	150	5.00	0.30	8.00	0.15	655.302A	0.4	180	0.2	0.9	0.10		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 309.401 and 324.341F.

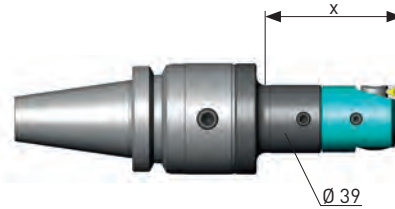

Workpiece material	Boring depth X [mm]	Rough boring SW 41							Fine boring EWN/EWE/EWB 41						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm2 GGG 40 GGG 50	80	654.952	0.8	220	9.00	0.50	15.00	0.25	655.390	0.8	350	0.2	2.5	0.14	
	115	654.942	0.4	220	9.00	0.50	15.00	0.25	655.390	0.8	300	0.2	2.0	0.14	
	140	654.942	0.4	170	8.50	0.40	14.00	0.20	655.380	0.4	180	0.2	2.0	0.10	
	160	654.942	0.4	125	8.00	0.40	12.00	0.20	655.380	0.4	125	0.2	1.5	0.10	
	175	654.942	0.4	90	7.00	0.30	11.00	0.15	655.370	0.2	100	0.2	1.5	0.06	
	200	654.935	0.2	60	6.00	0.30	9.00	0.15	655.370	0.2	55	0.1	0.9	0.06	
	260	654.935	0.2	150	5.00	0.30	8.00	0.15	655.380	0.4	180	0.2	0.9	0.10	
	GGG < 800 N/mm2 GGG 60 GGG 70 GGG 80	80	654.955	0.8	200	6.00	0.45	10.00	0.22	655.320	0.8	320	0.2	2.2	0.14
	115	654.945	0.4	180	5.50	0.40	9.00	0.20	655.318	0.4	260	0.2	1.8	0.10	
	140	654.945	0.4	150	5.00	0.40	8.50	0.20	655.318	0.4	170	0.2	1.8	0.10	
	160	654.945	0.4	120	4.50	0.35	8.00	0.17	655.319	0.2	125	0.2	1.2	0.06	
	175	654.945	0.4	90	4.00	0.25	7.50	0.15	655.319	0.2	100	0.2	1.2	0.06	
	200	654.935	0.2	60	3.50	0.25	7.00	0.15	655.319	0.2	55	0.1	0.7	0.06	
	260	654.935	0.2	150	3.50	0.25	6.00	0.15	655.318	0.4	170	0.2	0.7	0.10	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.987	0.8	850	7.00	0.50	11.00	0.25	655.398	0.8	1000	0.2	2.5	0.14	
	115	654.987	0.8	500	7.00	0.50	11.00	0.25	655.398	0.8	600	0.2	2.5	0.14	
	140	654.987	0.8	300	6.50	0.45	10.00	0.22	655.398	0.8	280	0.2	2.5	0.14	
	160	654.987	0.8	220	6.00	0.45	10.00	0.22	655.388	0.4	210	0.2	2.0	0.10	
	175	654.987	0.8	160	5.50	0.35	8.00	0.17	655.388	0.4	150	0.2	2.0	0.10	
	200	654.977	0.4	100	5.00	0.30	8.00	0.15	655.378	0.2	100	0.2	1.0	0.06	
	260	654.977	0.4	250	5.00	0.30	8.00	0.15	655.388	0.4	210	0.2	1.0	0.10	
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	80	654.959	0.8	650	7.00	0.50	11.00	0.25	655.320	0.8	650	0.2	2.5	0.14
	115	654.959	0.8	450	7.00	0.50	11.00	0.25	655.320	0.8	500	0.2	2.5	0.14	
	140	654.959	0.8	300	6.50	0.45	10.00	0.22	655.320	0.8	280	0.2	2.5	0.14	
	160	654.949	0.4	220	6.00	0.45	10.00	0.22	655.318	0.4	210	0.2	2.0	0.10	
	175	654.949	0.4	160	5.50	0.35	8.00	0.17	655.318	0.4	150	0.2	2.0	0.10	
	200	654.949	0.4	100	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	1.0	0.06	
	260	654.949	0.4	250	5.00	0.30	8.00	0.15	655.318	0.4	210	0.2	1.0	0.10	
S Titanium 3.7164	80	654.957	0.8	120	5.50	0.45	9.00	0.22	655.320	0.8	120	0.2	2.5	0.14	
	115	654.957	0.8	120	5.00	0.40	8.50	0.20	655.320	0.8	120	0.2	2.0	0.14	
	140	654.947	0.4	100	4.50	0.40	8.00	0.20	655.318	0.4	100	0.2	2.0	0.10	
	160	654.947	0.4	100	4.00	0.35	7.50	0.17	655.318	0.4	80	0.2	1.5	0.10	
	175	654.947	0.4	80	3.50	0.25	7.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	200	654.947	0.4	60	3.00	0.25	6.00	0.15	655.319	0.2	60	0.1	0.9	0.06	
	260	654.937	0.2	100	3.00	0.25	6.00	0.15	655.318	0.4	100	0.1	0.9	0.10	
	Ni-basic-, Co-basic-, Alloys	80	654.957	0.8	50	4.50	0.40	8.00	0.20	655.326	0.4	50	0.2	1.0	0.10
	115	654.947	0.4	50	4.00	0.35	7.00	0.17	655.326	0.4	50	0.2	1.0	0.10	
	140	654.947	0.4	40	4.00	0.30	7.00	0.15	655.326	0.4	40	0.2	1.0	0.10	
	160	654.937	0.2	40	3.50	0.30	6.00	0.15	655.316	0.2	30	0.1	0.8	0.06	
	175	654.937	0.4	30	3.00	0.20	5.00	0.10	655.316	0.2	30	0.1	0.8	0.06	
	200	654.937	0.2	40	3.00	0.20	5.00	0.10	655.316	0.2	30	0.1	0.6	0.06	
	260	654.937	0.2	40	3.00	0.20	5.00	0.10	655.326	0.4	40	0.1	0.6	0.10	



**Remark:**

For the boring depth X = 260 mm, the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.447 for the range Ø 53 - 66 mm
- Fine Boring: Insert holder size 2, 626.142 for the range Ø 50 - 63 mm, Insert holder size 3, 626.143 for the range Ø 61 - 74 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 10%, and 20% when using insert holder size 3.

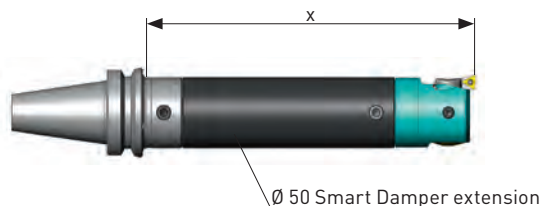
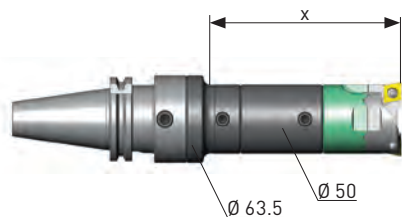


Workpiece material	Boring depth X [mm]	Rough boring SW 53							Fine boring EWN/EWE/EWB 53						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	80	654.990A	0.8	240	8.00	0.55	15.00	0.3	655.334	0.8	450	0.2	2.5	0.14	
	115	654.990A	0.8	240	8.00	0.55	14.00	0.3	655.334	0.8	380	0.2	2.5	0.14	
	145	654.993A	0.4	220	7.50	0.35	13.00	0.2	655.324	0.4	250	0.2	2.5	0.10	
	175	654.993A	0.4	150	6.00	0.35	10.00	0.2	655.324	0.4	150	0.2	2.0	0.10	
	205	654.993A	0.4	100	5.00	0.35	9.00	0.2	655.375	0.2	100	0.2	1.5	0.06	
	220	654.993A	0.4	60	4.50	0.35	8.00	0.2	655.375	0.2	80	0.1	1.0	0.06	
	310	654.993A	0.4	100	4.00	0.35	8.00	0.2	655.324	0.4	200	0.2	0.9	0.10	
	80	654.990A	0.8	220	8.00	0.50	15.00	0.25	655.334	0.8	450	0.2	2.5	0.14	
	115	654.990A	0.8	220	8.00	0.50	14.00	0.25	655.334	0.8	380	0.2	2.5	0.14	
	145	654.993A	0.4	200	7.50	0.30	13.00	0.15	655.324	0.4	250	0.2	2.5	0.10	
	175	654.993A	0.4	140	6.00	0.30	10.00	0.15	655.324	0.4	150	0.2	2.0	0.10	
	205	654.993A	0.4	100	5.00	0.30	9.00	0.15	655.375	0.2	100	0.2	1.5	0.06	
	220	654.993A	0.4	60	4.50	0.30	8.00	0.15	655.375	0.2	80	0.1	1.0	0.06	
	310	654.993A	0.4	100	4.00	0.30	8.00	0.15	655.324	0.4	200	0.2	0.9	0.10	
	80	654.965	0.8	200	7.50	0.50	14.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	115	654.965	0.8	200	7.00	0.50	13.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
	145	654.964	0.4	180	6.50	0.30	12.00	0.15	655.318	0.4	240	0.2	2.0	0.10	
	175	654.964	0.4	140	5.00	0.30	9.00	0.15	655.318	0.4	140	0.2	1.3	0.10	
	205	654.964	0.4	100	4.50	0.30	8.00	0.15	655.319	0.2	100	0.2	1.3	0.06	
	220	654.964	0.4	60	4.00	0.30	7.00	0.15	655.319	0.2	70	0.1	0.8	0.06	
	310	654.964	0.4	100	4.00	0.30	7.00	0.15	655.318	0.4	150	0.2	0.7	0.10	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	80	654.965	0.8	200	7.50	0.50	14.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		115	654.965	0.8	200	7.00	0.50	13.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		145	654.964	0.4	180	6.50	0.30	12.00	0.15	655.318	0.4	240	0.2	2.0	0.10
175		654.964	0.4	140	5.00	0.30	9.00	0.15	655.318	0.4	140	0.2	1.3	0.10	
205		654.964	0.4	100	4.50	0.30	8.00	0.15	655.319	0.2	100	0.2	1.3	0.06	
220		654.964	0.4	60	4.00	0.30	7.00	0.15	655.319	0.2	70	0.1	0.8	0.06	
310		654.964	0.4	100	4.00	0.30	7.00	0.15	655.318	0.4	170	0.2	0.7	0.10	
80		654.965	0.8	160	7.50	0.50	14.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
115		654.965	0.8	160	7.00	0.50	13.00	0.25	655.320	0.8	280	0.2	2.0	0.10	
145		654.964	0.4	160	6.50	0.30	12.00	0.15	655.318	0.4	220	0.2	2.0	0.10	
175		654.964	0.4	130	5.00	0.30	9.00	0.15	655.318	0.4	140	0.2	1.3	0.06	
205		654.964	0.4	100	4.50	0.30	8.00	0.15	655.319	0.2	100	0.2	1.3	0.06	
220	654.964	0.4	60	4.00	0.30	7.00	0.15	655.319	0.2	70	0.1	0.8	0.06		
310	654.964	0.4	100	4.00	0.30	7.00	0.15	655.318	0.4	170	0.2	0.7	0.10		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	80	654.991	0.8	240	11.00	0.55	20.00	0.3	655.303A	0.8	350	0.2	2.5	0.14	
	115	654.991	0.8	240	10.50	0.55	18.00	0.3	655.303A	0.8	350	0.2	2.5	0.14	
	145	654.991	0.8	220	10.00	0.55	16.00	0.3	655.303A	0.8	240	0.2	2.5	0.10	
	175	654.989	0.4	160	8.00	0.35	12.00	0.2	655.302A	0.4	150	0.2	2.0	0.10	
	205	654.989	0.4	100	7.00	0.35	10.00	0.2	655.302A	0.4	100	0.2	1.5	0.10	
	220	654.989	0.4	60	6.00	0.35	9.00	0.2	655.301A	0.2	70	0.1	1.0	0.06	
310	654.989	0.4	100	6.00	0.35	9.00	0.2	655.302A	0.4	180	0.2	0.9	0.10		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 309.501 and 324.352F.





Workpiece material	Boring depth X [mm]	Rough boring SW 53							Fine boring EWN/EWE/EWB 53						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	80	654.991	0.8	220	11.00	0.55	20.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	115	654.991	0.8	220	10.50	0.55	18.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	145	654.989	0.4	200	10.00	0.35	16.00	0.30	655.380	0.4	240	0.2	2.5	0.10	
	175	654.989	0.4	160	8.00	0.35	13.00	0.20	655.380	0.4	150	0.2	2.0	0.10	
	205	654.989	0.4	100	7.00	0.35	10.00	0.20	655.370	0.2	100	0.2	1.5	0.06	
	220	654.989	0.4	60	6.00	0.35	9.00	0.20	655.370	0.2	70	0.1	1.0	0.06	
	310	654.989	0.4	100	6.00	0.35	9.00	0.20	655.380	0.4	180	0.2	0.9	0.10	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	80	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		115	654.965	0.8	200	8.50	0.50	15.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		145	654.964	0.4	180	8.00	0.30	13.00	0.15	655.318	0.4	240	0.2	2.0	0.10
		175	654.964	0.4	140	6.00	0.30	9.00	0.15	655.318	0.4	140	0.2	1.3	0.10
		205	654.964	0.4	100	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	1.3	0.06
		220	654.964	0.4	60	4.00	0.30	7.00	0.15	655.319	0.2	70	0.1	0.8	0.06
		310	654.964	0.4	140	4.00	0.30	7.00	0.15	655.318	0.4	170	0.2	0.7	0.10
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.992	0.8	550	10.00	0.55	18.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	115	654.992	0.8	550	9.00	0.55	16.00	0.30	655.398	0.8	750	0.2	2.5	0.14	
	145	654.992	0.8	400	8.00	0.55	14.00	0.30	655.398	0.8	400	0.2	2.5	0.14	
	175	654.995	0.4	230	7.00	0.35	12.00	0.20	655.388	0.4	250	0.2	2.5	0.10	
	205	654.995	0.4	165	6.00	0.35	10.00	0.20	655.388	0.4	170	0.2	2.0	0.10	
	220	654.995	0.4	100	5.00	0.35	10.00	0.20	655.378	0.2	100	0.2	1.5	0.06	
	310	654.995	0.4	230	5.00	0.35	10.00	0.20	655.388	0.4	210	0.2	1.5	0.10	
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	80	654.979	0.8	550	10.00	0.55	18.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		115	654.979	0.8	550	9.00	0.55	16.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		145	654.979	0.8	400	8.00	0.55	14.00	0.30	655.320	0.8	400	0.2	2.5	0.14
		175	654.978	0.4	230	7.00	0.35	12.00	0.20	655.318	0.4	250	0.2	2.5	0.10
		205	654.978	0.4	165	6.00	0.35	10.00	0.20	655.318	0.4	170	0.2	2.0	0.10
		220	654.978	0.4	100	5.00	0.35	10.00	0.20	655.319	0.2	100	0.2	1.5	0.06
		310	654.978	0.4	230	5.00	0.35	10.00	0.20	655.318	0.4	210	0.2	1.5	0.10
S Titanium 3.7164	80	654.969	0.8	120	7.50	0.50	14.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	115	654.969	0.8	120	7.00	0.50	13.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	145	654.968	0.4	120	6.50	0.30	12.00	0.15	655.318	0.4	100	0.2	2.5	0.10	
	175	654.968	0.4	100	5.00	0.30	9.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	205	654.968	0.4	80	4.50	0.30	8.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	220	654.968	0.4	60	4.00	0.30	7.00	0.15	655.319	0.2	60	0.1	1.0	0.06	
	310	654.968	0.4	100	4.00	0.30	7.00	0.15	655.318	0.4	100	0.1	0.9	0.10	
	Ni-basic-, Co-basic-, Alloys	80	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.0	0.10
		115	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.0	0.10
		145	654.968	0.4	40	5.00	0.25	8.00	0.12	655.326	0.4	40	0.2	1.0	0.10
		175	654.968	0.4	40	4.00	0.25	7.00	0.12	655.316	0.2	30	0.1	0.8	0.06
		205	654.968	0.4	30	3.00	0.25	5.00	0.12	655.316	0.2	30	0.1	0.8	0.06
		220	654.968	0.4	30	3.00	0.25	5.00	0.12	655.316	0.2	30	0.1	0.6	0.06
		310	654.968	0.4	40	3.00	0.25	5.00	0.12	655.326	0.4	40	0.1	0.6	0.10

**Remark:**

For the boring depth X = 310 mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.457 for the range Ø 69 - 86 mm
- Fine Boring: Insert holder size 2, 626.152, for the range Ø 65 - 82 mm, insert holder size 3, 626.153, for the range Ø 78 - 95 mm

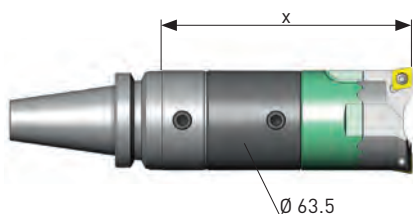

Workpiece material	Boring depth X [mm]	Rough boring SW 68							Fine boring EWN/EWE/EWB 68							
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed		
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	mm/Ø	mm/Ø	mm/U		
P	Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	90	654.990A	0.8	240	10.00	0.55	18.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
		110	654.990A	0.8	240	10.00	0.55	18.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
		140	654.990A	0.8	220	9.00	0.55	16.0	0.30	655.334	0.8	350	0.2	2.5	0.14	
		170	654.993A	0.4	200	8.00	0.35	14.0	0.20	655.324	0.4	250	0.2	2.0	0.10	
		200	654.993A	0.4	130	7.00	0.35	12.0	0.20	655.324	0.4	150	0.2	1.5	0.10	
		230	654.993A	0.4	80	6.00	0.35	9.0	0.20	655.375	0.2	80	0.2	1.0	0.06	
		340	654.993A	0.4	100	6.00	0.35	9.0	0.20	655.324	0.4	200	0.2	1.0	0.10	
		Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	90	654.990A	0.8	220	10.00	0.50	18.0	0.25	655.334	0.8	450	0.2	2.5	0.14
	110		654.990A	0.8	220	10.00	0.50	18.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
	140		654.990A	0.8	200	9.00	0.50	16.0	0.25	655.334	0.8	350	0.2	2.5	0.14	
	170		654.993A	0.4	180	8.00	0.30	14.0	0.15	655.324	0.4	250	0.2	2.0	0.10	
	200		654.993A	0.4	130	7.00	0.30	12.0	0.15	655.324	0.4	150	0.2	1.5	0.10	
	230		654.993A	0.4	80	6.00	0.30	9.0	0.15	655.375	0.2	80	0.2	1.0	0.06	
	340		654.993A	0.4	100	6.00	0.30	9.0	0.15	655.324	0.4	200	0.2	1.0	0.10	
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764		90	654.965	0.8	200	9.00	0.50	16.0	0.25	655.320	0.8	350	0.2	2.0	0.14
		110	654.965	0.8	200	9.00	0.50	16.0	0.25	655.320	0.8	350	0.2	2.0	0.14	
		140	654.965	0.8	180	8.00	0.50	15.0	0.25	655.318	0.4	300	0.2	2.0	0.10	
		170	654.964	0.4	160	7.00	0.30	13.0	0.15	655.318	0.4	240	0.2	1.8	0.10	
		200	654.964	0.4	130	6.00	0.30	11.0	0.15	655.318	0.4	140	0.2	1.3	0.10	
		230	654.964	0.4	70	5.00	0.30	8.0	0.15	655.319	0.2	70	0.2	0.8	0.06	
		340	654.964	0.4	100	5.00	0.30	8.0	0.15	655.318	0.4	150	0.2	0.8	0.10	
		M	Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	90	654.965	0.8	200	9.00	0.50	16.0	0.25	655.320	0.8	350	0.2	2.0
	110			654.965	0.8	200	9.00	0.50	16.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	140			654.965	0.8	180	8.00	0.50	15.0	0.25	655.318	0.4	300	0.2	2.0	0.10
170	654.964			0.4	160	7.00	0.30	13.0	0.15	655.318	0.4	240	0.2	1.8	0.10	
200	654.964			0.4	130	6.00	0.30	11.0	0.15	655.319	0.2	140	0.2	1.3	0.06	
230	654.964			0.4	70	5.00	0.30	8.0	0.15	655.319	0.2	70	0.2	0.8	0.06	
Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	90		654.965	0.8	160	9.00	0.50	16.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	110		654.965	0.8	160	9.00	0.50	16.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	140		654.965	0.8	140	8.00	0.50	15.0	0.25	655.318	0.4	280	0.2	2.0	0.10	
	170		654.964	0.4	140	7.00	0.30	13.0	0.15	655.318	0.4	220	0.2	2.0	0.10	
	200		654.964	0.4	120	6.00	0.30	11.0	0.15	655.319	0.2	120	0.2	1.3	0.06	
	230		654.964	0.4	70	5.00	0.30	8.0	0.15	655.319	0.2	70	0.2	0.8	0.06	
K	Gray cast iron GG 15 GG 20 GG 25 GG 30	90	654.991	0.8	240	15.00	0.55	22.0	0.30	655.303A	0.8	350	0.2	2.5	0.14	
		110	654.991	0.8	240	15.00	0.55	22.0	0.30	655.303A	0.8	350	0.2	2.5	0.14	
		140	654.991	0.8	220	13.00	0.55	20.0	0.30	655.303A	0.8	300	0.2	2.5	0.14	
		170	654.991	0.8	200	12.00	0.55	18.0	0.30	655.302A	0.4	250	0.2	2.0	0.10	
		200	654.989	0.4	140	11.00	0.35	16.0	0.20	655.302A	0.4	140	0.2	1.5	0.10	
		230	654.989	0.4	80	9.00	0.35	13.0	0.20	655.301A	0.2	80	0.2	1.0	0.06	
		340	654.989	0.4	100	9.00	0.35	13.0	0.20	655.302A	0.4	180	0.2	1.0	0.10	



**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 309.601 and 324.361F.

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.



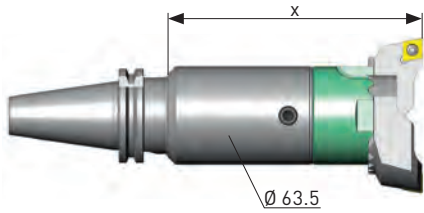



Workpiece material	Boring depth X [mm]	Rough boring SW 68							Fine boring EWN/EWE/EWB 68						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	mm/U	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	90	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	110	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	140	654.991	0.8	200	13.00	0.55	20.00	0.30	655.390	0.8	300	0.2	2.5	0.14	
	170	654.989	0.4	180	12.00	0.35	18.00	0.20	655.380	0.4	250	0.2	2.0	0.10	
	200	654.989	0.4	130	11.00	0.35	16.00	0.20	655.380	0.4	140	0.2	1.5	0.10	
	230	654.989	0.4	80	9.00	0.35	13.00	0.20	655.370	0.2	80	0.2	1.0	0.06	
	340	654.989	0.4	100	9.00	0.35	13.00	0.20	655.380	0.4	180	0.2	1.0	0.10	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	90	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		110	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		140	654.965	0.8	180	10.00	0.50	18.00	0.25	655.318	0.4	300	0.2	2.0	0.10
		170	654.964	0.4	160	9.00	0.30	16.00	0.15	655.318	0.4	240	0.2	1.8	0.10
		200	654.964	0.4	130	8.00	0.30	14.00	0.15	655.319	0.2	140	0.2	1.3	0.06
		230	654.964	0.4	70	7.00	0.30	11.00	0.15	655.319	0.2	70	0.2	0.8	0.06
		340	654.964	0.4	140	7.00	0.30	11.00	0.15	655.318	0.4	170	0.2	0.8	0.10
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	90	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	110	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	140	654.992	0.8	400	11.00	0.55	18.00	0.30	655.398	0.8	750	0.2	2.5	0.14	
	170	654.992	0.8	350	10.00	0.55	16.00	0.30	655.398	0.8	400	0.2	2.5	0.14	
	200	654.992	0.8	220	9.00	0.55	14.00	0.30	655.388	0.4	240	0.2	2.0	0.10	
	230	654.995	0.4	120	8.00	0.35	11.00	0.20	655.378	0.2	120	0.2	1.5	0.06	
	340	654.995	0.4	230	8.00	0.35	11.00	0.20	655.388	0.4	210	0.2	1.5	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	90	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		110	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		140	654.979	0.8	400	11.00	0.55	18.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		170	654.979	0.8	350	10.00	0.55	16.00	0.30	655.320	0.8	400	0.2	2.5	0.14
		200	654.978	0.4	220	9.00	0.35	14.00	0.20	655.318	0.4	240	0.2	2.0	0.10
		230	654.978	0.4	120	8.00	0.35	11.00	0.20	655.319	0.2	120	0.2	1.5	0.06
		340	654.978	0.4	230	8.00	0.35	11.00	0.20	655.318	0.4	210	0.2	1.5	0.10
S Titanium 3.7164	90	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	110	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	140	654.969	0.8	120	8.00	0.50	15.00	0.25	655.318	0.4	100	0.2	2.5	0.10	
	170	654.968	0.4	100	7.00	0.30	13.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	200	654.968	0.4	80	6.00	0.30	11.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	230	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	340	654.968	0.4	100	5.00	0.30	8.00	0.15	655.318	0.4	100	0.2	1.0	0.10	
	Ni-basic-, Co-basic-, Alloys	90	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		110	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		140	654.968	0.4	40	6.00	0.25	9.00	0.12	655.326	0.4	40	0.2	1.5	0.10
		170	654.968	0.4	40	5.00	0.25	8.00	0.12	655.316	0.2	30	0.1	1.0	0.06
		200	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.8	0.06
		230	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06
		340	654.968	0.4	40	3.00	0.25	5.00	0.12	655.326	0.4	40	0.1	0.6	0.10

**Remark:**

For the boring depth X = 340 mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.467 for the range Ø 88 - 110 mm
- Fine Boring: Insert holder size 2, 626.162, for the range Ø 94 - 126 mm, insert holder size 3, 626.163, for the range Ø 118 - 150 mm

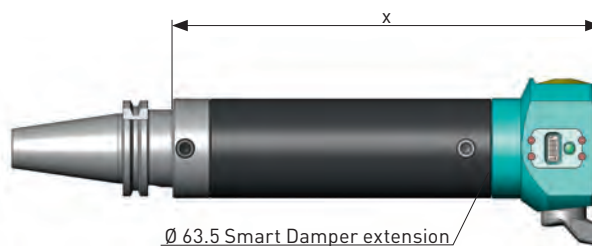



Workpiece material	Boring depth X [mm]	Rough boring SW 98							Fine boring EWN/EWE/EWB 100						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm2 1.0037 1.0401 1.0715	90	654.990A	0.8	240	10.00	0.55	18.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	110	654.990A	0.8	240	10.00	0.55	18.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	140	654.990A	0.8	220	9.00	0.55	16.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	170	654.993A	0.4	200	8.00	0.35	14.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	200	654.993A	0.4	130	7.00	0.35	12.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	230	654.993A	0.4	80	6.00	0.35	9.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	340	654.993A	0.4	60	6.00	0.35	9.00	0.20	655.375	0.2	100	0.2	1.0	0.06	
	Steel 450-850 N/mm2 1.0050 1.0503 1.1141 1.1191 1.5752	90	654.990A	0.8	220	10.00	0.50	18.00	0.25	655.334	0.8	450	0.2	2.5	0.14
		110	654.990A	0.8	220	10.00	0.50	18.00	0.25	655.334	0.8	450	0.2	2.5	0.14
		140	654.990A	0.8	200	9.00	0.50	16.00	0.25	655.334	0.8	350	0.2	2.5	0.14
		170	654.993A	0.4	180	8.00	0.30	14.00	0.15	655.324	0.4	250	0.2	2.0	0.10
		200	654.993A	0.4	130	7.00	0.30	12.00	0.15	655.324	0.4	150	0.2	1.5	0.10
		230	654.993A	0.4	80	6.00	0.30	9.00	0.15	655.375	0.2	80	0.2	1.0	0.06
		340	654.993A	0.4	60	6.00	0.30	9.00	0.15	655.375	0.2	100	0.2	1.0	0.06
M Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	90	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	110	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	140	654.965	0.8	180	8.00	0.50	15.00	0.25	655.318	0.4	300	0.2	2.0	0.10	
	170	654.964	0.4	160	7.00	0.30	13.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
	200	654.964	0.4	130	6.00	0.30	11.00	0.15	655.318	0.4	140	0.2	1.0	0.10	
	230	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	340	654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	90	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		110	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		140	654.965	0.8	180	8.00	0.50	15.00	0.25	655.318	0.4	300	0.2	2.0	0.10
170		654.964	0.4	160	7.00	0.30	13.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
200		654.964	0.4	130	6.00	0.30	11.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
230		654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
340		654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	0.8	0.06	
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571		90	654.965	0.8	160	9.00	0.50	16.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		110	654.965	0.8	160	9.00	0.50	16.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		140	654.965	0.8	140	8.00	0.50	15.00	0.25	655.318	0.4	280	0.2	2.0	0.10
	170	654.964	0.4	140	7.00	0.30	13.00	0.15	655.318	0.4	220	0.2	1.5	0.10	
	200	654.964	0.4	120	6.00	0.30	11.00	0.15	655.319	0.2	120	0.2	1.0	0.06	
	230	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
K Gray cast iron GG 15 GG 20 GG 25 GG 30	90	654.991	0.8	240	15.00	0.55	22.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	110	654.991	0.8	240	15.00	0.55	22.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	140	654.991	0.8	220	13.00	0.55	20.00	0.30	655.303A	0.8	300	0.2	2.5	0.14	
	170	654.991	0.8	200	12.00	0.55	18.00	0.30	655.302A	0.4	250	0.2	2.0	0.10	
	200	654.989	0.4	140	11.00	0.35	16.00	0.20	655.302A	0.4	140	0.2	1.5	0.10	
	230	654.989	0.4	80	9.00	0.35	13.00	0.20	655.301A	0.2	80	0.2	1.0	0.06	
340	654.989	0.4	60	9.00	0.35	13.00	0.20	655.301A	0.2	100	0.2	1.0	0.06		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 310.607 and 324.361F.

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.





Workpiece material	Boring depth X [mm]	Rough boring SW 98							Fine boring EWN/EWE/EWB 100						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	mm/Ø	mm/Ø	mm/U	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	90	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	110	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	140	654.991	0.8	200	13.00	0.55	20.00	0.30	655.390	0.8	300	0.2	2.5	0.14	
	170	654.989	0.4	180	12.00	0.35	18.00	0.20	655.380	0.4	250	0.2	2.0	0.10	
	200	654.989	0.4	130	11.00	0.35	16.00	0.20	655.380	0.4	140	0.2	1.5	0.10	
	230	654.989	0.4	80	9.00	0.35	13.00	0.20	655.370	0.2	80	0.2	1.0	0.06	
	340	654.989	0.4	60	9.00	0.35	13.00	0.20	655.370	0.2	100	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	90	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		110	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		140	654.965	0.8	180	10.00	0.50	18.00	0.25	655.318	0.4	300	0.2	2.0	0.10
		170	654.964	0.4	160	9.00	0.30	16.00	0.15	655.318	0.4	240	0.2	1.5	0.10
		200	654.964	0.4	130	8.00	0.30	14.00	0.15	655.318	0.4	140	0.2	1.0	0.10
		230	654.964	0.4	70	7.00	0.30	11.00	0.15	655.319	0.2	70	0.2	0.8	0.06
		340	654.964	0.4	60	7.00	0.30	11.00	0.15	655.319	0.2	100	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	90	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	110	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	140	654.992	0.8	400	11.00	0.55	18.00	0.30	655.398	0.8	750	0.2	2.5	0.14	
	170	654.992	0.8	350	10.00	0.55	16.00	0.30	655.388	0.4	400	0.2	2.5	0.10	
	200	654.992	0.8	220	9.00	0.55	14.00	0.30	655.388	0.4	240	0.2	2.0	0.10	
	230	654.995	0.4	120	8.00	0.35	11.00	0.20	655.378	0.2	120	0.2	1.5	0.06	
	340	654.995	0.4	80	8.00	0.35	11.00	0.20	655.378	0.2	120	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	90	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		110	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		140	654.979	0.8	400	11.00	0.55	18.00	0.30	655.320	0.8	650	0.2	2.5	0.14
		170	654.979	0.8	350	10.00	0.55	16.00	0.30	655.318	0.4	400	0.2	2.5	0.10
		200	654.978	0.4	220	9.00	0.35	14.00	0.20	655.318	0.4	240	0.2	2.0	0.10
		230	654.978	0.4	120	8.00	0.35	11.00	0.20	655.319	0.2	120	0.2	1.5	0.06
		340	654.978	0.4	80	8.00	0.35	11.00	0.20	655.319	0.2	120	0.2	1.5	0.06
S Titanium 3.7164	90	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	110	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	140	654.969	0.8	120	8.00	0.50	15.00	0.25	655.318	0.4	100	0.2	2.5	0.10	
	170	654.968	0.4	100	7.00	0.30	13.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	200	654.968	0.4	80	6.00	0.30	11.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	230	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	340	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	90	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		110	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		140	654.968	0.4	40	6.00	0.25	9.00	0.12	655.326	0.4	40	0.2	1.5	0.10
		170	654.968	0.4	40	5.00	0.25	8.00	0.12	655.316	0.2	30	0.1	1.0	0.06
		200	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.8	0.06
		230	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06
		340								655.316	0.2	30	0.1	0.6	0.06

**Remark:**

For the boring depth X = 340 mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.477 for the range Ø 125 - 153 mm
- Fine Boring: Insert holder size 2, 626.162, for the range Ø 126 - 179 mm, insert holder size 3, 626.163, for the range Ø 150 - 203 mm





Workpiece material	Boring depth X [mm]	Rough boring SW 148							Fine boring EWN/EWE 100, EWB 150						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	90	654.990A	0.8	240	10.00	0.55	18.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	110	654.990A	0.8	240	10.00	0.55	18.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	140	654.990A	0.8	220	9.00	0.55	16.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	170	654.993A	0.4	200	8.00	0.35	14.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	200	654.993A	0.4	130	7.00	0.35	12.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	230	654.993A	0.4	80	6.00	0.35	9.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	340	654.993A	0.4	60	6.00	0.35	9.00	0.20	655.375	0.2	100	0.2	1.0	0.06	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	90	654.990A	0.8	220	10.00	0.50	18.00	0.25	655.334	0.8	450	0.2	2.5	0.14
		110	654.990A	0.8	220	10.00	0.50	18.00	0.25	655.334	0.8	450	0.2	2.5	0.14
		140	654.990A	0.8	200	9.00	0.50	16.00	0.25	655.334	0.8	350	0.2	2.5	0.14
		170	654.993A	0.4	180	8.00	0.30	14.00	0.15	655.324	0.4	250	0.2	2.0	0.10
		200	654.993A	0.4	130	7.00	0.30	12.00	0.15	655.324	0.4	150	0.2	1.5	0.10
		230	654.993A	0.4	80	6.00	0.30	9.00	0.15	655.375	0.2	80	0.2	1.0	0.06
		340	654.993A	0.4	60	6.00	0.30	9.00	0.15	655.375	0.2	100	0.2	1.0	0.06
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	90	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	110	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	140	654.965	0.8	180	8.00	0.50	15.00	0.25	655.318	0.4	300	0.2	2.0	0.10	
	170	654.964	0.4	160	7.00	0.30	13.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
	200	654.964	0.4	130	6.00	0.30	11.00	0.15	655.318	0.4	140	0.2	1.0	0.10	
	230	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	340	654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	90	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		110	654.965	0.8	200	9.00	0.50	16.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		140	654.965	0.8	180	8.00	0.50	15.00	0.25	655.318	0.4	300	0.2	2.0	0.10
170		654.964	0.4	160	7.00	0.30	13.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
200		654.964	0.4	130	6.00	0.30	11.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
230		654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
340		654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	0.8	0.06	
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571		90	654.965	0.8	160	9.00	0.50	16.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		110	654.965	0.8	160	9.00	0.50	16.00	0.25	655.320	0.8	300	0.2	2.0	0.14
		140	654.965	0.8	140	8.00	0.50	15.00	0.25	655.318	0.4	280	0.2	2.0	0.10
	170	654.964	0.4	140	7.00	0.30	13.00	0.15	655.318	0.4	220	0.2	1.5	0.10	
	200	654.964	0.4	120	6.00	0.30	11.00	0.15	655.319	0.2	120	0.2	1.0	0.06	
	230	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	340	654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	100	0.2	0.8	0.06	
K Gray cast iron GG 15 GG 20 GG 25 GG 30	90	654.991	0.8	240	15.00	0.55	22.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	110	654.991	0.8	240	15.00	0.55	22.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	140	654.991	0.8	220	13.00	0.55	20.00	0.30	655.303A	0.8	300	0.2	2.5	0.14	
	170	654.991	0.8	200	12.00	0.55	18.00	0.30	655.302A	0.4	250	0.2	2.0	0.10	
	200	654.989	0.4	140	11.00	0.35	16.00	0.20	655.302A	0.4	140	0.2	1.5	0.10	
	230	654.989	0.4	80	9.00	0.35	13.00	0.20	655.301A	0.2	80	0.2	1.0	0.06	
340	654.989	0.4	60	9.00	0.35	13.00	0.20	655.301A	0.2	100	0.2	1.0	0.06		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min, we recommend to balance the complete and pre-set tool assembly or to use a balanceable fine boring head on a fine balanced tool shank, e.g. 310.608 and 324.361F.

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.

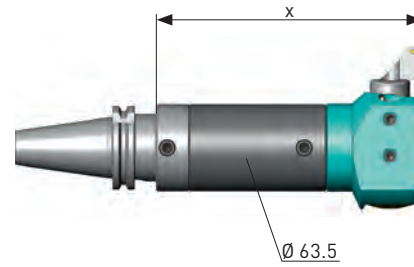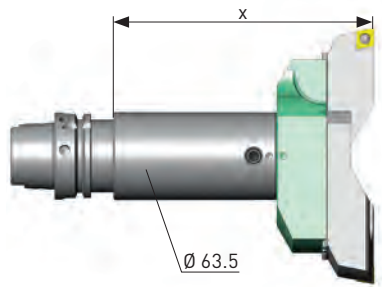

Workpiece material	Boring depth X [mm]	Rough boring SW 148							Fine boring EWN/EWE 100, EWB 150					
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	mm/U
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	90	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14
	110	654.991	0.8	220	15.00	0.55	22.00	0.30	655.390	0.8	350	0.2	2.5	0.14
	140	654.991	0.8	200	13.00	0.55	20.00	0.30	655.390	0.8	300	0.2	2.5	0.14
	170	654.989	0.4	180	12.00	0.35	18.00	0.20	655.380	0.4	250	0.2	2.0	0.10
	200	654.989	0.4	130	11.00	0.35	16.00	0.20	655.380	0.4	140	0.2	1.5	0.10
	230	654.989	0.4	80	9.00	0.35	13.00	0.20	655.370	0.2	80	0.2	1.0	0.06
	340	654.989	0.4	60	9.00	0.35	13.00	0.20	655.370	0.2	100	0.2	1.0	0.06
	90	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
	110	654.965	0.8	200	12.00	0.50	20.00	0.25	655.320	0.8	320	0.2	2.0	0.14
	140	654.965	0.8	180	10.00	0.50	18.00	0.25	655.318	0.4	300	0.2	2.0	0.10
	170	654.964	0.4	160	9.00	0.30	16.00	0.15	655.318	0.4	240	0.2	1.5	0.10
	200	654.964	0.4	130	8.00	0.30	14.00	0.15	655.318	0.4	140	0.2	1.0	0.10
	230	654.964	0.4	70	7.00	0.30	11.00	0.15	655.319	0.2	70	0.2	0.8	0.06
	340	654.964	0.4	60	7.00	0.30	11.00	0.15	655.319	0.2	100	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	90	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14
	110	654.992	0.8	550	13.00	0.55	20.00	0.30	655.398	0.8	1200	0.2	2.5	0.14
	140	654.992	0.8	400	11.00	0.55	18.00	0.30	655.398	0.8	750	0.2	2.5	0.14
	170	654.992	0.8	350	10.00	0.55	16.00	0.30	655.388	0.4	400	0.2	2.5	0.10
	200	654.992	0.8	220	9.00	0.55	14.00	0.30	655.388	0.4	240	0.2	2.0	0.10
	230	654.995	0.4	120	8.00	0.35	11.00	0.20	655.378	0.2	120	0.2	1.5	0.06
	340	654.995	0.4	80	8.00	0.35	11.00	0.20	655.378	0.2	120	0.2	1.5	0.06
	90	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
	110	654.979	0.8	550	13.00	0.55	20.00	0.30	655.320	0.8	650	0.2	2.5	0.14
	140	654.979	0.8	400	11.00	0.55	18.00	0.30	655.320	0.8	650	0.2	2.5	0.14
	170	654.979	0.8	350	10.00	0.55	16.00	0.30	655.318	0.4	400	0.2	2.5	0.10
	200	654.978	0.4	220	9.00	0.35	14.00	0.20	655.318	0.4	240	0.2	2.0	0.10
	230	654.978	0.4	120	8.00	0.35	11.00	0.20	655.319	0.2	120	0.2	1.5	0.06
	340	654.978	0.4	80	8.00	0.35	11.00	0.20	655.319	0.2	120	0.2	1.5	0.06
S Titanium 3.7164	90	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14
	110	654.969	0.8	120	9.00	0.50	16.00	0.25	655.320	0.8	120	0.2	2.5	0.14
	140	654.969	0.8	120	8.00	0.50	15.00	0.25	655.318	0.4	100	0.2	2.5	0.10
	170	654.968	0.4	100	7.00	0.30	13.00	0.15	655.318	0.4	80	0.2	2.0	0.10
	200	654.968	0.4	80	6.00	0.30	11.00	0.15	655.318	0.4	70	0.2	1.5	0.10
	230	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06
	340	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06
	90	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
	110	654.969	0.8	50	7.00	0.40	11.00	0.20	655.326	0.4	50	0.2	1.5	0.10
	140	654.968	0.4	40	6.00	0.25	9.00	0.12	655.326	0.4	40	0.2	1.5	0.10
	170	654.968	0.4	40	5.00	0.25	8.00	0.12	655.316	0.2	30	0.1	1.0	0.06
	200	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.8	0.06
	230	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06
	340	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06



**Remark:**

For the boring depth X = 340 mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.487 for the range Ø 175 - 203 mm
- Fine Boring: Insert holder size 3, 626.163, for the range Ø 150 - 203 mm





RSS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm2 1.0037 1.0401 1.0715 Steel 450-850 N/mm2 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	115	654.990A	0.8	240	8.00	0.55	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	135	654.990A	0.8	240	8.00	0.55	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	175	654.990A	0.8	220	7.00	0.55	12.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	195	654.993A	0.4	200	6.00	0.35	10.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	215	654.993A	0.4	130	5.00	0.35	8.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	235	654.993A	0.4	80	4.00	0.35	6.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	255	654.993A	0.4	60	4.00	0.35	6.00	0.20	655.375	0.2	60	0.2	1.0	0.06	
	115	654.990A	0.8	220	8.00	0.50	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	135	654.990A	0.8	220	8.00	0.50	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	175	654.990A	0.8	200	7.00	0.50	12.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	195	654.993A	0.4	180	6.00	0.30	10.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	215	654.993A	0.4	130	5.00	0.30	8.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	235	654.993A	0.4	80	4.00	0.30	6.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	255	654.993A	0.4	60	4.00	0.30	6.00	0.20	655.375	0.2	60	0.2	1.0	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	115	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		135	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		175	654.965	0.8	180	6.00	0.50	10.00	0.25	655.318	0.4	300	0.2	2.0	0.10
		195	654.964	0.4	160	5.00	0.30	8.00	0.15	655.318	0.4	240	0.2	1.5	0.10
		215	654.964	0.4	130	4.00	0.30	6.00	0.15	655.319	0.2	140	0.2	1.0	0.06
		235	654.964	0.4	70	4.00	0.30	6.00	0.15	655.319	0.2	70	0.2	0.8	0.06
		255	654.964	0.4	60	4.00	0.30	6.00	0.15	655.319	0.2	50	0.2	0.8	0.06
115		654.965	0.8	160	7.00	0.50	12.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
135		654.965	0.8	160	7.00	0.50	12.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
175		654.965	0.8	140	6.00	0.50	10.00	0.25	655.318	0.4	280	0.2	2.0	0.10	
195		654.964	0.4	140	5.00	0.30	8.00	0.15	655.318	0.4	220	0.2	1.5	0.10	
215		654.964	0.4	120	4.00	0.30	6.00	0.15	655.319	0.2	120	0.2	1.0	0.06	
235		654.964	0.4	70	4.00	0.30	6.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
255		654.964	0.4	60	4.00	0.30	6.00	0.15	655.319	0.2	50	0.2	0.8	0.06	
K Gray cast iron GG 15 GG 20 GG 25 GG 30		115	654.991	0.8	240	12.00	0.55	18.00	0.30	655.303A	0.8	350	0.2	2.5	0.14
	135	654.991	0.8	240	12.00	0.55	18.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	175	654.991	0.8	220	10.00	0.55	16.00	0.30	655.303A	0.8	300	0.2	2.5	0.14	
	195	654.989	0.4	200	9.00	0.35	14.00	0.20	655.302A	0.4	250	0.2	2.0	0.10	
	215	654.989	0.4	140	8.00	0.35	12.00	0.20	655.302A	0.4	140	0.2	1.5	0.10	
	235	654.989	0.4	80	6.00	0.35	9.00	0.20	655.301A	0.2	80	0.2	1.0	0.06	
255	654.989	0.4	60	6.00	0.35	9.00	0.20	655.301A	0.2	60	0.2	1.0	0.06		



**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min we recommend to use the counter weight 318.105 and to balance it according to the table (see operating instructions).

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.





DVS



Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	115	654.991	0.8	220	12.00	0.55	18.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	135	654.991	0.8	220	12.00	0.55	18.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	175	654.991	0.8	200	10.00	0.55	16.00	0.30	655.390	0.8	300	0.2	2.5	0.14	
	195	654.989	0.4	180	9.00	0.35	14.00	0.20	655.380	0.4	250	0.2	2.0	0.10	
	215	654.989	0.4	140	8.00	0.35	12.00	0.20	655.380	0.4	140	0.2	1.5	0.10	
	235	654.989	0.4	80	6.00	0.35	9.00	0.20	655.370	0.2	80	0.2	1.0	0.06	
	255	654.989	0.4	60	6.00	0.35	9.00	0.20	655.370	0.2	60	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	115	654.965	0.8	200	9.00	0.50	15.00	0.25	655.320	0.8	320	0.2	2.0	0.14
	135	654.965	0.8	200	9.00	0.50	15.00	0.25	655.320	0.8	320	0.2	2.0	0.14	
	175	654.965	0.8	180	8.00	0.50	13.00	0.25	655.318	0.4	300	0.2	2.0	0.10	
	195	654.964	0.4	160	7.00	0.30	11.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
	215	654.964	0.4	130	6.00	0.30	9.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
	235	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	255	654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	50	0.2	0.8	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	115	654.992	0.8	550	10.00	0.55	16.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	135	654.992	0.8	550	10.00	0.55	16.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	175	654.992	0.8	400	9.00	0.55	14.00	0.30	655.398	0.8	750	0.2	2.5	0.14	
	195	654.995	0.4	350	8.00	0.35	12.00	0.20	655.388	0.4	400	0.2	2.5	0.10	
	215	654.995	0.4	220	7.00	0.35	11.00	0.20	655.388	0.4	240	0.2	2.0	0.10	
	235	654.995	0.4	120	6.00	0.35	10.00	0.20	655.378	0.2	120	0.2	1.5	0.06	
	255	654.995	0.4	80	6.00	0.35	10.00	0.20	655.378	0.2	100	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	115	654.979	0.8	550	10.00	0.55	16.00	0.30	655.320	0.8	650	0.2	2.5	0.14
	135	654.979	0.8	550	10.00	0.55	16.00	0.30	655.320	0.8	650	0.2	2.5	0.14	
	175	654.979	0.8	400	9.00	0.55	14.00	0.30	655.320	0.8	650	0.2	2.5	0.14	
	195	654.978	0.4	350	8.00	0.35	12.00	0.20	655.318	0.4	400	0.2	2.5	0.10	
	215	654.978	0.4	220	7.00	0.35	11.00	0.20	655.318	0.4	240	0.2	2.0	0.10	
	235	654.978	0.4	120	6.00	0.35	10.00	0.20	655.319	0.2	120	0.2	1.5	0.06	
	255	654.978	0.4	80	6.00	0.35	10.00	0.20	655.319	0.2	100	0.2	1.5	0.06	
S Titanium 3.7164	115	654.969	0.8	120	8.00	0.50	13.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	135	654.969	0.8	120	8.00	0.50	13.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	175	654.969	0.8	120	8.00	0.50	13.00	0.25	655.318	0.4	100	0.2	2.5	0.10	
	195	654.968	0.4	100	6.00	0.30	11.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	215	654.968	0.4	80	5.00	0.30	8.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	235	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	255	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	115	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.5	0.10
	135	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.5	0.10	
	175	654.968	0.4	40	5.00	0.25	8.00	0.12	655.326	0.4	40	0.2	1.5	0.10	
	195	654.968	0.4	40	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	1.0	0.06	
	215	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.8	0.06	
	235	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06	
	255								655.316	0.2	30	0.1	0.6	0.06	

**DVS rough boring**

For double offset rough boring "DVS" a longer insert holder 637.951 / CC12 or 637.953 / CC16 has to be mounted on one side of the tool assembly. The longer insert holders are coloured black.

**Extension of the boring range with additional insert holders:**

- Fine Boring: Insert holder size 2, 626.272, for the range Ø 270 - 295 mm, insert holder size 3, 626.273, for the range Ø 295 - 320 mm



RSS



Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm2  1.0037 1.0401 1.0715  Steel 450-850 N/mm2 1.0050 1.0503 1.1141 1.1191 1.5752  Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	115	654.990A	0.8	240	8.00	0.55	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	135	654.990A	0.8	240	8.00	0.55	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	175	654.990A	0.8	220	7.00	0.55	12.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	195	654.993A	0.4	200	6.00	0.35	10.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	215	654.993A	0.4	130	5.00	0.35	8.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	235	654.993A	0.4	80	4.00	0.35	6.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	255	654.993A	0.4	60	4.00	0.35	6.00	0.20	655.375	0.2	60	0.2	1.0	0.06	
	115	654.990A	0.8	220	8.00	0.50	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	135	654.990A	0.8	220	8.00	0.50	14.00	0.30	655.334	0.8	450	0.2	2.5	0.14	
	175	654.990A	0.8	200	7.00	0.50	12.00	0.30	655.334	0.8	350	0.2	2.5	0.14	
	195	654.993A	0.4	180	6.00	0.30	10.00	0.20	655.324	0.4	250	0.2	2.0	0.10	
	215	654.993A	0.4	130	5.00	0.30	8.00	0.20	655.324	0.4	150	0.2	1.5	0.10	
	235	654.993A	0.4	80	4.00	0.30	6.00	0.20	655.375	0.2	80	0.2	1.0	0.06	
	255	654.993A	0.4	60	4.00	0.30	6.00	0.20	655.375	0.2	60	0.2	1.0	0.06	
	115	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	135	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14	
	175	654.965	0.8	180	6.00	0.50	10.00	0.25	655.318	0.4	300	0.2	2.0	0.10	
	195	654.964	0.4	160	5.00	0.30	8.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
	215	654.964	0.4	130	4.00	0.30	6.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
	235	654.964	0.4	70	4.00	0.30	6.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	255	654.964	0.4	60	4.00	0.30	6.00	0.15	655.319	0.2	50	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762  Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	115	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		135	654.965	0.8	200	7.00	0.50	12.00	0.25	655.320	0.8	350	0.2	2.0	0.14
		175	654.965	0.8	180	6.00	0.50	10.00	0.25	655.318	0.4	300	0.2	2.0	0.10
195		654.964	0.4	160	5.00	0.30	8.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
215		654.964	0.4	130	4.00	0.30	6.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
235		654.964	0.4	70	4.00	0.30	6.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
255		654.964	0.4	60	4.00	0.30	6.00	0.15	655.319	0.2	50	0.2	0.8	0.06	
115		654.965	0.8	160	7.00	0.50	12.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
135		654.965	0.8	160	7.00	0.50	12.00	0.25	655.320	0.8	300	0.2	2.0	0.14	
175		654.965	0.8	140	6.00	0.50	10.00	0.25	655.318	0.4	280	0.2	2.0	0.10	
195		654.964	0.4	140	5.00	0.30	8.00	0.15	655.318	0.4	220	0.2	1.5	0.10	
215		654.964	0.4	120	4.00	0.30	6.00	0.15	655.319	0.2	120	0.2	1.0	0.06	
235	654.964	0.4	70	4.00	0.30	6.00	0.15	655.319	0.2	70	0.2	0.8	0.06		
255	654.964	0.4	60	4.00	0.30	6.00	0.15	655.319	0.2	50	0.2	0.8	0.06		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	115	654.991	0.8	240	12.00	0.55	18.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	135	654.991	0.8	240	12.00	0.55	18.00	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	175	654.991	0.8	220	10.00	0.55	16.00	0.30	655.303A	0.8	300	0.2	2.5	0.14	
	195	654.989	0.4	200	9.00	0.35	14.00	0.20	655.302A	0.4	250	0.2	2.0	0.10	
	215	654.989	0.4	140	8.00	0.35	12.00	0.20	655.302A	0.4	140	0.2	1.5	0.10	
	235	654.989	0.4	80	6.00	0.35	9.00	0.20	655.301A	0.2	80	0.2	1.0	0.06	
255	654.989	0.4	60	6.00	0.35	9.00	0.20	655.301A	0.2	60	0.2	1.0	0.06		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 240 m/min we recommend to use the counter weight 318.105 and to balance it according to the table (see operating instructions).

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.

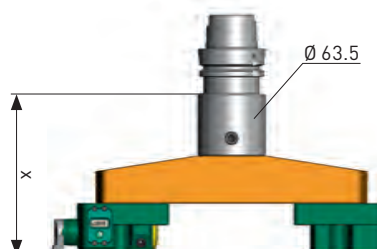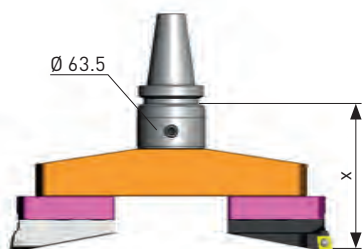

DVS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	115	654.991	0.8	220	12.00	0.55	18.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	135	654.991	0.8	220	12.00	0.55	18.00	0.30	655.390	0.8	350	0.2	2.5	0.14	
	175	654.991	0.8	200	10.00	0.55	16.00	0.30	655.390	0.8	300	0.2	2.5	0.14	
	195	654.989	0.4	180	9.00	0.35	14.00	0.20	655.380	0.4	250	0.2	2.0	0.10	
	215	654.989	0.4	140	8.00	0.35	12.00	0.20	655.380	0.4	140	0.2	1.5	0.10	
	235	654.989	0.4	80	6.00	0.35	9.00	0.20	655.370	0.2	80	0.2	1.0	0.06	
	255	654.989	0.4	60	6.00	0.35	9.00	0.20	655.370	0.2	60	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	115	654.965	0.8	200	9.00	0.50	15.00	0.25	655.320	0.8	320	0.2	2.0	0.14
	135	654.965	0.8	200	9.00	0.50	15.00	0.25	655.320	0.8	320	0.2	2.0	0.14	
	175	654.965	0.8	180	8.00	0.50	13.00	0.25	655.318	0.4	300	0.2	2.0	0.10	
	195	654.964	0.4	160	7.00	0.30	11.00	0.15	655.318	0.4	240	0.2	1.5	0.10	
	215	654.964	0.4	130	6.00	0.30	9.00	0.15	655.319	0.2	140	0.2	1.0	0.06	
	235	654.964	0.4	70	5.00	0.30	8.00	0.15	655.319	0.2	70	0.2	0.8	0.06	
	255	654.964	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	50	0.2	0.8	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	115	654.992	0.8	550	10.00	0.55	16.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	135	654.992	0.8	550	10.00	0.55	16.00	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	175	654.992	0.8	400	9.00	0.55	14.00	0.30	655.398	0.8	750	0.2	2.5	0.14	
	195	654.995	0.4	350	8.00	0.35	12.00	0.20	655.388	0.4	400	0.2	2.5	0.10	
	215	654.995	0.4	220	7.00	0.35	11.00	0.20	655.388	0.4	240	0.2	2.0	0.10	
	235	654.995	0.4	120	6.00	0.35	10.00	0.20	655.378	0.2	120	0.2	1.5	0.06	
	255	654.995	0.4	80	6.00	0.35	10.00	0.20	655.378	0.2	100	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	115	654.979	0.8	550	10.00	0.55	16.00	0.30	655.320	0.8	650	0.2	2.5	0.14
	135	654.979	0.8	550	10.00	0.55	16.00	0.30	655.320	0.8	650	0.2	2.5	0.14	
	175	654.979	0.8	400	9.00	0.55	14.00	0.30	655.320	0.8	650	0.2	2.5	0.14	
	195	654.978	0.4	350	8.00	0.35	12.00	0.20	655.318	0.4	400	0.2	2.5	0.10	
	215	654.978	0.4	220	7.00	0.35	11.00	0.20	655.318	0.4	240	0.2	2.0	0.10	
	235	654.978	0.4	120	6.00	0.35	10.00	0.20	655.319	0.2	120	0.2	1.5	0.06	
	255	654.978	0.4	80	6.00	0.35	10.00	0.20	655.319	0.2	100	0.2	1.5	0.06	
S Titanium 3.7164	115	654.969	0.8	120	8.00	0.50	13.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	135	654.969	0.8	120	8.00	0.50	13.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	175	654.969	0.8	120	8.00	0.50	13.00	0.25	655.318	0.4	100	0.2	2.5	0.10	
	195	654.968	0.4	100	6.00	0.30	11.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	215	654.968	0.4	80	5.00	0.30	8.00	0.15	655.318	0.4	70	0.2	1.5	0.10	
	235	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	255	654.968	0.4	60	5.00	0.30	8.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	115	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.5	0.10
	135	654.969	0.8	50	6.00	0.40	10.00	0.20	655.326	0.4	50	0.2	1.5	0.10	
	175	654.968	0.4	40	5.00	0.25	8.00	0.12	655.326	0.4	40	0.2	1.5	0.10	
	195	654.968	0.4	40	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	1.0	0.06	
	215	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.8	0.06	
	235	654.968	0.4	30	4.00	0.25	6.00	0.12	655.316	0.2	30	0.1	0.6	0.06	
	255								655.316	0.2	30	0.1	0.6	0.06	


**DVS rough boring**

For double offset rough boring "DVS" a longer insert holder 637.951 / CC12 or 637.953 / CC16 has to be mounted on one side of the tool assembly. The longer insert holders are coloured black.

**Extension of the boring range with additional insert holders:**

- Fine Boring: Insert holder size 2, 626.272, for the range Ø 340 - 365 mm, insert holder size 3, 626.273, for the range Ø 365 - 390 mm



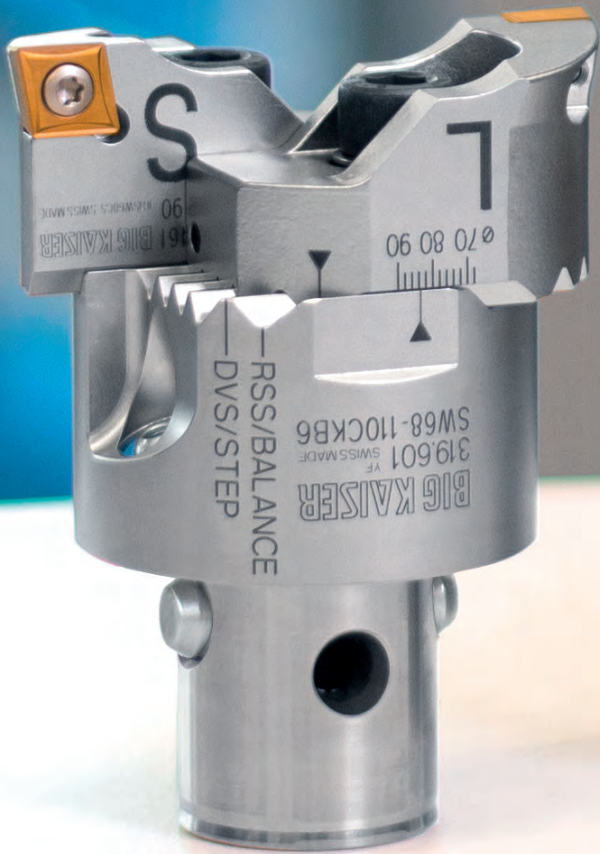

With the exception of the diameter range 15 - 22 mm (page 38/39), which is covered by the fine boring heads EW 15 and EW 18, there is cutting data of one specific diameter range on each double page, which corresponds to the size of the rough- and the fine boring head. For the diameter range bigger than 200 mm, the data is valid for light weight boring tools series 318.

The diameter ranges shown in the headline of each page will be reached for rough boring with a second pair of insert holders and for fine boring with additional insert holders size 2 and size 3.

The maximum values of the cutting data given in the tables require spindle speed of 12 500 rpm and spindle power of approx. 38 kW. In case of lower available speeds and spindle power, the cutting data has to be adapted accordingly.

The cutting data is valid for rough boring heads type SW, and for the fine boring heads type EWN, EWB/EWB-UP and EWE. The max. permissible cutting speeds to operate these heads are listed below and may not be exceeded at any time:


Rough boring heads type SW:	1200 m/min
Fine boring heads EWN/EWE:	1200 m/min
Balanceable fine boring heads EWB/EWB-UP:	2000 m/min

**In the table the following terms and dimensions are used:**

Workpiece material:	Material no. according to DIN or generally used designation	
Boring depth X:	Projection length according to picture 1 and picture 2	
Insert:	Detailed information about the inserts is shown in the BIG KAISER main catalogue.	
R:	Nose radius	(mm)
Vc:	Cutting speed	(m/min)
Stock allow.:	Stock allowance per cut in Ø	(mm)
fn:	Feed per revolution	(mm/U)
Ra:	Surface roughness (Ra 1.6 µm for N7)	
RSS:	Rotationally symmetrical rough boring	page 7
DVS:	Double offset rough boring	page 7
VPS:	Full profile rough boring	page 8


**Diameter-length ratio**

For long tool assemblies with different boring bar diameters, the boring depth X may not be the decisive factor for the cutting data to be applied, but the total tool length. Should the diameter-length ratio in relation to taper gauge diameter be bigger than 1:6, the lowest cutting data (highest X-value) has to be applied.

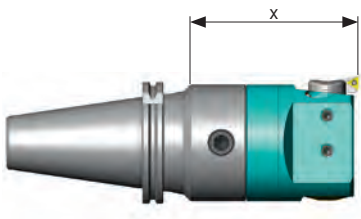

Picture 1


Boring depth X including the useable length of the tool shank and the boring head.

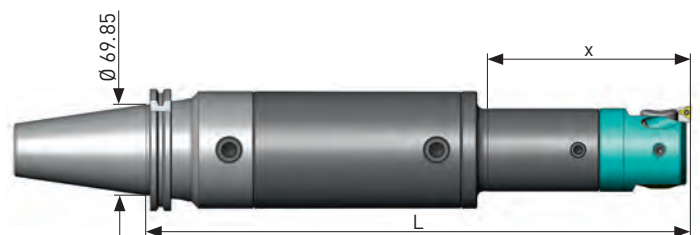


Picture 2

Boring depth X including the useable length of the reduction and the corresponding boring head.



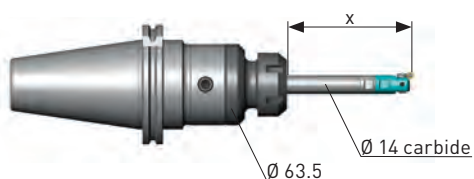

EW 15

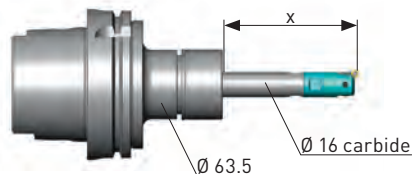


EW 18

Workpiece material	Boring depth X [mm]	Fine boring EW 15						Fine boring EW 18						
		Inserts		Vc	Allow.		Feed	Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
P Steel < 450 N/mm2 1.0037 1.0401 1.0715 Steel 450-850 N/mm2 1.005 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06	
	100	655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	180	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06	
	80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06	
	100	655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	180	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	50	655.602	0.2	320	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06	
	60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06	
	80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06	
	100	655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	200	0.2	0.5	0.06	
	120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	150	0.2	0.5	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	50	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	260	0.2	0.5	0.06
100		655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	190	0.2	0.5	0.06	
120		655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	140	0.2	0.5	0.06	
140		655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04	
160								655.606	0.1	40	0.1	0.3	0.04	
50		655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	250	0.2	0.5	0.06	
60		655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	250	0.2	0.5	0.06	
80		655.602	0.2	225	0.2	0.5	0.06	655.602	0.2	225	0.2	0.5	0.06	
100		655.602	0.2	160	0.2	0.5	0.06	655.602	0.2	160	0.2	0.5	0.06	
120		655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	120	0.2	0.5	0.06	
140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04		
160							655.606	0.1	40	0.1	0.3	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	50	655.603	0.2	350	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	60	655.603	0.2	310	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	80	655.603	0.2	240	0.2	0.5	0.06	655.603	0.2	310	0.2	0.5	0.06	
	100	655.603	0.2	180	0.2	0.5	0.06	655.603	0.2	240	0.2	0.5	0.06	
	120	655.605	0.1	90	0.1	0.3	0.04	655.603	0.2	180	0.2	0.5	0.06	
	140	655.605	0.1	40	0.1	0.3	0.04	655.605	0.1	100	0.1	0.3	0.04	
	160							655.605	0.1	50	0.1	0.3	0.04	


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to balance the complete and pre-set tool assembly.

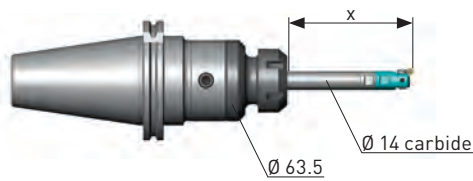

EW 15


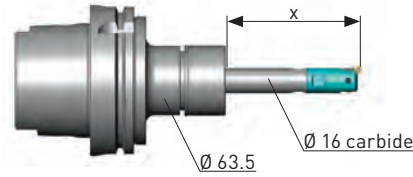


EW 18

Workpiece material	Boring depth X [mm]	Fine boring EW 15						Fine boring EW 18						
		Inserts		Vc	Allow.		Feed	Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	50	655.603	0.2	350	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	60	655.603	0.2	310	0.2	0.5	0.06	655.603	0.2	350	0.2	0.5	0.06	
	80	655.603	0.2	240	0.2	0.5	0.06	655.603	0.2	310	0.2	0.5	0.06	
	100	655.603	0.2	180	0.2	0.5	0.06	655.603	0.2	240	0.2	0.5	0.06	
	120	655.605	0.1	90	0.1	0.3	0.04	655.603	0.2	180	0.2	0.5	0.06	
	140	655.605	0.1	40	0.1	0.3	0.04	655.605	0.1	100	0.1	0.3	0.04	
	160							655.605	0.1	50	0.1	0.3	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	50	655.602	0.2	320	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06
		60	655.602	0.2	280	0.2	0.5	0.06	655.602	0.2	320	0.2	0.5	0.06
		80	655.602	0.2	240	0.2	0.5	0.06	655.602	0.2	280	0.2	0.5	0.06
		100	655.602	0.2	170	0.2	0.5	0.06	655.602	0.2	200	0.2	0.5	0.06
		120	655.606	0.1	90	0.1	0.3	0.04	655.602	0.2	150	0.2	0.5	0.06
		140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	90	0.1	0.3	0.04
		160							655.606	0.1	40	0.1	0.3	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	50	655.601	0.2	550	0.2	0.5	0.06	655.601	0.2	700	0.2	0.5	0.06	
	60	655.601	0.2	550	0.2	0.5	0.06	655.601	0.2	700	0.2	0.5	0.06	
	80	655.601	0.2	400	0.2	0.5	0.06	655.601	0.2	650	0.2	0.5	0.06	
	100	655.601	0.2	300	0.2	0.5	0.06	655.601	0.2	500	0.2	0.5	0.06	
	120	655.601	0.2	150	0.2	0.3	0.06	655.601	0.2	300	0.2	0.5	0.06	
	140	655.604	0.1	70	0.1	0.3	0.04	655.604	0.1	150	0.1	0.3	0.04	
	160							655.604	0.1	70	0.1	0.3	0.04	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	50	655.602	0.2	400	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06
		60	655.602	0.2	330	0.2	0.5	0.06	655.602	0.2	400	0.2	0.5	0.06
		80	655.602	0.2	250	0.2	0.5	0.06	655.602	0.2	350	0.2	0.5	0.06
100		655.602	0.2	180	0.2	0.5	0.06	655.602	0.2	300	0.2	0.5	0.06	
120		655.602	0.2	100	0.2	0.3	0.06	655.602	0.2	180	0.2	0.5	0.06	
140		655.606	0.1	50	0.1	0.3	0.04	655.606	0.1	100	0.1	0.3	0.04	
160							655.606	0.1	50	0.1	0.3	0.04		
S Titanium 3.7164	50	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	60	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	80	655.602	0.2	120	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	100	655.602	0.2	80	0.2	0.4	0.06	655.602	0.2	120	0.2	0.4	0.06	
	120	655.606	0.1	60	0.1	0.3	0.04	655.602	0.2	80	0.2	0.4	0.06	
	140	655.606	0.1	40	0.1	0.3	0.04	655.606	0.1	60	0.1	0.3	0.04	
	160							655.606	0.1	40	0.1	0.3	0.04	
	Ni-basic-, Co-basic-, Alloys	50	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		60	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		80	655.602	0.2	50	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		100	655.602	0.2	40	0.1	0.2	0.06	655.602	0.2	50	0.1	0.2	0.06
		120	655.606	0.1	30	0.1	0.2	0.04	655.606	0.1	40	0.1	0.2	0.04
		140							655.606	0.1	30	0.1	0.2	0.04
		160												

**Remark:**

The boring heads EW 15 and EW 18 will be screwed on carbide shanks 615.233 / 615.221 and 615.268 / 615.227 / 615.269 / 615.229. For chucking the carbide shanks, we recommend BIG MEGA Chuck collet holders.


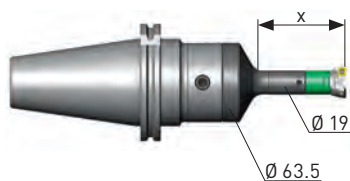


Workpiece material	Boring depth X [mm]	Rough boring SW 20							Fine boring EWN 20						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	65	654.850A	0.4	220	3.0	0.35	5.0	0.18	651.713	0.4	400	0.2	1.0	0.10	
	85	654.850A	0.4	125	2.0	0.30	4.0	0.15	651.738	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	90	1.5	0.25	3.0	0.12	651.838	0.2	100	0.2	0.7	0.06	
	115	654.850A	0.4	220	3.0	0.35	5.0	0.18	651.738	0.3	260	0.2	1.0	0.08	
	150	654.840A	0.2	140	2.0	0.30	4.0	0.15	651.838	0.2	140	0.2	1.0	0.06	
	175	654.840A	0.2	80	1.5	0.25	3.0	0.12	651.824	0.1	80	0.1	0.5	0.04	
	200	654.840A	0.2	40	1.0	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04	
	65	654.850A	0.4	220	3.0	0.30	5.0	0.15	651.713	0.4	400	0.2	1.0	0.10	
	85	654.850A	0.4	125	2.0	0.25	4.0	0.12	651.738	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	90	1.5	0.25	3.0	0.12	651.838	0.2	100	0.2	0.7	0.06	
	115	654.850A	0.4	220	3.0	0.30	5.0	0.15	651.738	0.3	260	0.2	1.0	0.08	
	150	654.840A	0.2	140	2.0	0.25	4.0	0.12	651.838	0.2	140	0.2	1.0	0.06	
	175	654.840A	0.2	80	1.5	0.25	3.0	0.12	651.824	0.1	80	0.1	0.5	0.04	
	200	654.840A	0.2	40	1.0	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	65	654.856	0.4	200	2.5	0.25	4.0	0.15	651.737	0.4	320	0.2	0.8	0.10
		85	654.856	0.4	110	2.0	0.20	3.5	0.12	651.737	0.3	250	0.2	0.6	0.08
		100	654.846	0.2	80	1.5	0.20	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06
		115	654.856	0.4	200	2.5	0.25	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08
		150	654.846	0.2	120	2.0	0.20	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06
		175	654.846	0.2	60	1.5	0.20	2.5	0.12	651.824	0.1	70	0.1	0.3	0.04
		200	654.846	0.2	40	1.0	0.20	2.0	0.12	651.824	0.1	40	0.1	0.3	0.04
65		654.856	0.4	180	2.5	0.30	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08	
85		654.856	0.4	100	2.0	0.25	3.5	0.12	651.837	0.2	200	0.2	0.6	0.06	
100		654.846	0.2	80	1.5	0.25	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06	
115		654.856	0.4	180	2.5	0.30	4.0	0.15	651.737	0.3	230	0.2	0.8	0.08	
150		654.846	0.2	120	2.0	0.25	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06	
175	654.846	0.2	60	1.5	0.25	2.5	0.12	651.824	0.1	60	0.1	0.3	0.04		
200	654.846	0.2	40	1.0	0.25	2.0	0.12	651.824	0.1	40	0.1	0.3	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	65	654.852	0.4	220	4.0	0.30	7.0	0.15	651.734	0.4	350	0.2	1.2	0.10	
	85	654.852	0.4	140	3.5	0.30	6.0	0.15	651.735	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	80	3.0	0.25	5.0	0.12	651.834	0.2	100	0.2	0.7	0.06	
	115	654.852	0.4	220	4.0	0.30	7.0	0.15	651.734	0.4	280	0.2	1.0	0.10	
	150	654.840A	0.2	140	3.5	0.30	6.0	0.15	651.834	0.2	150	0.2	0.8	0.06	
	175	654.840A	0.2	80	3.0	0.25	4.0	0.12	651.824	0.1	80	0.1	0.7	0.04	
	200	654.840A	0.2	40	2.0	0.25	3.0	0.12	651.824	0.1	40	0.1	0.6	0.04	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to balance the complete and pre-set tool assembly.

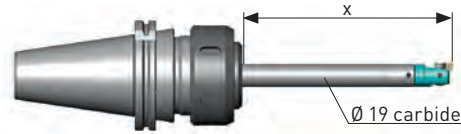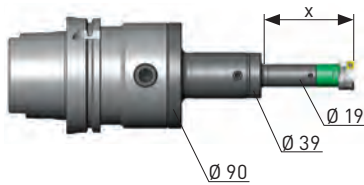

Workpiece material	Boring depth X [mm]	Rough boring SW 20							Fine boring EWN 20						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	65	654.852	0.4	220	3.5	0.30	6.0	0.15	651.734	0.4	350	0.2	1.0	0.10	
	85	654.852	0.4	140	3.0	0.30	5.0	0.15	651.735	0.3	260	0.2	0.8	0.08	
	100	654.840A	0.2	80	2.5	0.25	4.0	0.12	651.834	0.2	100	0.2	0.7	0.06	
	115	654.852	0.4	220	3.5	0.30	6.0	0.15	651.734	0.4	280	0.2	1.0	0.10	
	150	654.840A	0.2	140	3.0	0.30	5.0	0.15	651.834	0.2	150	0.2	1.0	0.06	
	175	654.840A	0.2	80	2.5	0.25	4.0	0.12	651.824	0.1	80	0.1	0.5	0.04	
	200	654.840A	0.2	40	2.0	0.25	3.0	0.12	651.824	0.1	40	0.1	0.5	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	65	654.856	0.4	200	2.5	0.25	4.0	0.15	651.734	0.4	320	0.2	0.8	0.10
		85	654.856	0.4	110	2.0	0.20	3.5	0.12	651.737	0.3	250	0.2	0.6	0.08
		100	654.846	0.2	80	1.5	0.20	2.5	0.12	651.837	0.2	100	0.2	0.5	0.06
		115	654.856	0.4	200	2.5	0.25	4.0	0.15	651.737	0.3	250	0.2	0.8	0.08
		150	654.846	0.2	120	2.0	0.20	3.5	0.12	651.837	0.2	130	0.2	0.6	0.06
		175	654.846	0.2	60	1.5	0.20	2.5	0.12	651.824	0.1	70	0.1	0.3	0.04
		200	654.846	0.2	40	1.0	0.20	2.0	0.12	651.824	0.1	40	0.1	0.3	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	65	654.888	0.4	350	3.0	0.30	6.0	0.15	651.723	0.3	650	0.2	1.2	0.08	
	85	654.888	0.4	200	3.0	0.30	5.0	0.15	651.723	0.3	350	0.2	1.0	0.08	
	100	654.877	0.2	100	2.0	0.25	4.0	0.12	651.825	0.2	120	0.2	0.7	0.06	
	115	654.888	0.4	430	3.0	0.30	6.0	0.15	651.723	0.3	450	0.2	1.2	0.08	
	150	654.888	0.4	230	3.0	0.30	5.0	0.15	651.723	0.3	240	0.2	1.0	0.08	
	175	654.877	0.2	130	2.0	0.25	4.0	0.12	651.823	0.1	150	0.1	0.9	0.04	
	200	654.877	0.2	70	2.0	0.25	3.0	0.12	651.823	0.1	60	0.1	0.8	0.04	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	65	654.889	0.4	250	3.0	0.30	6.0	0.15	651.737	0.3	650	0.2	1.2	0.08
		85	654.889	0.4	200	3.0	0.30	5.0	0.15	651.737	0.3	350	0.2	1.0	0.08
		100	654.879	0.2	100	2.0	0.25	4.0	0.12	651.837	0.2	120	0.2	0.7	0.06
		115	654.889	0.4	250	3.0	0.30	6.0	0.15	651.737	0.3	450	0.2	1.2	0.08
		150	654.889	0.4	230	3.0	0.30	5.0	0.15	651.737	0.3	240	0.2	1.0	0.08
		175	654.879	0.2	130	2.0	0.25	4.0	0.12	651.824	0.1	150	0.1	0.9	0.04
		200	654.879	0.2	70	2.0	0.25	3.0	0.12	651.824	0.1	60	0.1	0.8	0.04
S Titanium 3.7164	65	654.847	0.4	120	3.0	0.25	5.0	0.12	651.737	0.3	120	0.2	1.0	0.08	
	85	654.847	0.4	80	2.0	0.20	3.5	0.10	651.837	0.2	80	0.2	0.8	0.06	
	115	654.847	0.4	120	3.0	0.25	5.0	0.12	651.737	0.3	120	0.2	1.0	0.08	
	150	654.847	0.4	120	2.0	0.20	3.5	0.10	651.837	0.2	70	0.2	0.8	0.06	
	175	654.837	0.2	80	2.0	0.20	3.0	0.10	651.824	0.1	40	0.1	0.5	0.04	
	Ni-basic-, Co-basic-, Alloys	65	654.847	0.4	50	3.0	0.20	4.0	0.10	651.839	0.2	50	0.1	0.5	0.06
		85	654.837	0.2	30	2.0	0.15	3.0	0.10	651.839	0.2	30	0.1	0.5	0.06
115		654.847	0.4	50	3.0	0.20	4.0	0.10	651.839	0.2	40	0.1	0.5	0.06	
150		654.837	0.2	30	2.0	0.15	3.0	0.10	651.839	0.2	25	0.1	0.5	0.06	



**Remark:**

For a cost effective high volume production with boring depth X of 115 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.417 for the range Ø 25 - 31 mm
- Fine Boring: Insert holder size 2, 626.112, for the range Ø 25 - 31 mm, insert holder size 3, 626.113, for the range Ø 30 - 36 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced - by 15%, and by 30% when using insert holder size 3.

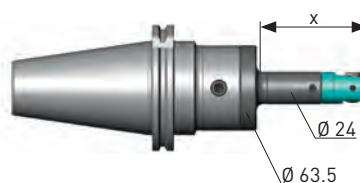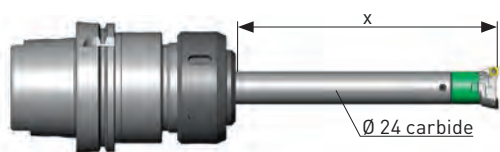



Workpiece material	Boring depth X [mm]	Rough boring SW 25							Fine boring EWN/EWB 25						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	80	654.850A	0.4	220	3.5	0.35	6.0	0.18	651.713	0.4	400	0.2	1.2	0.10	
	100	654.850A	0.4	125	2.5	0.30	5.0	0.15	651.738	0.3	140	0.2	1.0	0.08	
	125	654.840A	0.2	60	2.0	0.25	4.0	0.12	651.838	0.2	100	0.2	0.8	0.06	
	130	654.850A	0.4	220	3.5	0.35	5.0	0.18	651.713	0.4	260	0.2	1.2	0.10	
	175	654.840A	0.2	140	2.5	0.30	4.0	0.15	651.838	0.2	140	0.2	1.0	0.06	
	200	654.840A	0.2	90	2.0	0.25	3.0	0.12	651.838	0.2	90	0.1	0.8	0.06	
	250	654.840A	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.7	0.04	
	80	654.850A	0.4	220	3.5	0.30	6.0	0.15	651.713	0.4	400	0.2	1.2	0.10	
	100	654.850A	0.4	125	2.5	0.25	5.0	0.12	651.738	0.3	140	0.2	1.0	0.08	
	125	654.840A	0.2	60	2.0	0.25	4.0	0.12	651.838	0.2	100	0.2	0.8	0.06	
	130	654.850A	0.4	220	3.5	0.30	5.0	0.15	651.713	0.4	260	0.2	1.2	0.10	
	175	654.840A	0.2	140	2.5	0.25	4.0	0.12	651.838	0.2	140	0.2	1.0	0.06	
	200	654.840A	0.2	90	2.0	0.25	3.0	0.12	651.838	0.2	90	0.1	0.8	0.06	
	250	654.840A	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.7	0.04	
	80	654.856	0.4	200	3.0	0.30	5.0	0.15	651.734	0.4	320	0.2	1.0	0.10	
	100	654.856	0.4	110	2.5	0.25	4.0	0.12	651.737	0.3	140	0.2	0.8	0.08	
	125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06	
	130	654.856	0.4	200	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08	
	175	654.846	0.2	120	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06	
	200	654.846	0.2	80	2.0	0.25	3.0	0.12	651.824	0.1	80	0.1	0.6	0.04	
	250	654.846	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	80	654.856	0.4	200	3.0	0.30	5.0	0.15	651.737	0.3	320	0.2	1.0	0.08
		100	654.856	0.4	110	2.5	0.25	4.0	0.12	651.837	0.2	140	0.2	0.8	0.06
		125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06
130		654.856	0.4	200	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08	
175		654.846	0.2	120	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06	
200		654.846	0.2	80	2.0	0.25	3.0	0.12	651.824	0.1	80	0.1	0.6	0.04	
250		654.846	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04	
80		654.856	0.4	180	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08	
100		654.856	0.4	100	2.5	0.25	4.0	0.12	651.837	0.2	140	0.2	0.8	0.06	
125		654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06	
130		654.856	0.4	180	3.0	0.30	5.0	0.15	651.737	0.3	230	0.2	1.0	0.08	
175		654.846	0.2	100	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06	
200	654.846	0.2	80	2.0	0.25	3.0	0.12	651.824	0.1	70	0.1	0.6	0.04		
250	654.846	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	80	654.852	0.4	220	5.0	0.30	8.0	0.15	651.734	0.4	350	0.2	1.2	0.10	
	100	654.852	0.4	140	4.0	0.30	7.0	0.15	651.632	0.3	140	0.2	1.0	0.08	
	125	654.840A	0.2	60	3.0	0.25	6.0	0.12	651.834	0.2	100	0.2	0.8	0.06	
	130	654.852	0.4	220	5.0	0.30	8.0	0.15	651.735	0.3	280	0.2	1.2	0.08	
	175	654.840A	0.2	100	4.0	0.30	7.0	0.15	651.834	0.2	150	0.2	1.0	0.06	
	200	654.840A	0.2	90	3.0	0.25	5.0	0.12	651.824	0.1	90	0.1	0.8	0.04	
	250	654.840A	0.2	45	2.0	0.25	4.0	0.12	651.824	0.1	40	0.1	0.7	0.04	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to use the balanceable fine boring head 309.201 and to balance the complete tool assembly.



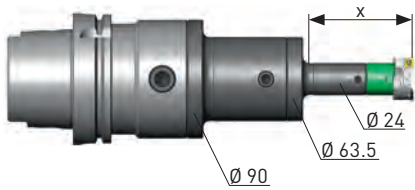

Workpiece material	Boring depth X [mm]	Rough boring SW 25							Fine boring EWN/EWB 25						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	80	654.852	0.4	220	4.0	0.30	7.0	0.15	651.734	0.4	350	0.2	1.2	0.10	
	100	654.852	0.4	140	3.5	0.30	6.0	0.15	651.735	0.3	140	0.2	1.0	0.08	
	125	654.840A	0.2	60	3.0	0.25	5.0	0.12	651.834	0.2	100	0.2	0.8	0.06	
	130	654.852	0.4	220	4.0	0.30	7.0	0.15	651.735	0.3	280	0.2	1.2	0.08	
	175	654.840A	0.2	100	3.5	0.30	6.0	0.15	651.834	0.2	150	0.2	1.0	0.06	
	200	654.840A	0.2	90	3.0	0.25	5.0	0.12	651.824	0.1	90	0.1	0.8	0.04	
	250	654.840A	0.2	45	2.0	0.25	4.0	0.12	651.824	0.1	40	0.1	0.7	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	80	654.856	0.4	200	3.0	0.30	5.0	0.15	651.734	0.4	320	0.2	1.0	0.10
		100	654.856	0.4	110	2.5	0.25	4.0	0.12	651.737	0.3	140	0.2	0.8	0.08
		125	654.846	0.2	60	2.0	0.25	3.0	0.12	651.837	0.2	100	0.2	0.6	0.06
		130	654.856	0.4	200	3.0	0.30	5.0	0.15	651.737	0.3	250	0.2	1.0	0.08
		175	654.846	0.2	120	2.5	0.25	4.0	0.12	651.837	0.2	130	0.2	0.8	0.06
		200	654.846	0.2	80	2.0	0.25	3.0	0.12	651.824	0.1	80	0.1	0.6	0.04
		250	654.846	0.2	45	1.5	0.25	2.0	0.12	651.824	0.1	40	0.1	0.5	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.888	0.4	420	4.0	0.30	7.0	0.15	651.723	0.3	750	0.2	1.2	0.08	
	100	654.888	0.4	200	3.0	0.30	6.0	0.15	651.723	0.3	200	0.2	1.2	0.08	
	125	654.877	0.2	90	2.0	0.25	4.0	0.12	651.825	0.2	120	0.2	1.0	0.06	
	130	654.888	0.4	560	4.0	0.30	7.0	0.15	651.723	0.3	550	0.2	1.2	0.08	
	175	654.888	0.4	230	3.0	0.30	6.0	0.15	651.723	0.3	240	0.2	1.2	0.08	
	200	654.877	0.2	150	2.0	0.25	4.0	0.12	651.825	0.2	150	0.2	1.0	0.06	
	250	654.877	0.2	75	2.0	0.25	4.0	0.12	651.823	0.1	75	0.1	0.8	0.04	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	80	654.889	0.4	320	4.0	0.30	7.0	0.15	651.737	0.3	650	0.2	1.2	0.08
		100	654.889	0.4	200	3.0	0.30	6.0	0.15	651.737	0.3	200	0.2	1.2	0.08
		125	654.879	0.2	90	2.0	0.25	4.0	0.12	651.837	0.2	120	0.2	1.0	0.06
		130	654.889	0.4	320	4.0	0.30	7.0	0.15	651.737	0.3	550	0.2	1.2	0.08
		175	654.889	0.4	230	3.0	0.30	6.0	0.15	651.737	0.3	240	0.2	1.2	0.08
		200	654.879	0.2	150	2.0	0.25	4.0	0.12	651.837	0.2	150	0.2	1.0	0.06
		250	654.879	0.2	75	2.0	0.25	4.0	0.12	651.824	0.1	75	0.1	0.8	0.04
S Titanium 3.7164	80	654.847	0.4	120	3.5	0.25	5.5	0.12	651.737	0.3	120	0.2	1.2	0.08	
	100	654.847	0.4	80	2.5	0.20	4.0	0.10	651.837	0.2	80	0.2	1.0	0.06	
	130	654.847	0.4	120	3.5	0.25	5.5	0.12	651.737	0.3	120	0.2	1.2	0.08	
	175	654.847	0.4	120	2.5	0.20	4.0	0.10	651.837	0.2	70	0.1	1.0	0.06	
	200	654.837	0.2	80	2.0	0.20	3.0	0.10	651.824	0.1	40	0.1	0.8	0.04	
	Ni-basic-, Co-basic-, Alloys	80	654.847	0.4	50	3.0	0.20	4.0	0.10	651.839	0.2	50	0.2	0.8	0.06
		100	654.837	0.2	30	2.0	0.15	3.0	0.10	651.839	0.2	30	0.1	0.8	0.06
		130	654.847	0.4	50	3.0	0.20	4.0	0.10	651.839	0.2	40	0.1	0.6	0.06
		175	654.837	0.2	30	2.0	0.15	3.0	0.10	651.839	0.2	25	0.1	0.6	0.06



**Remark:**

For a cost effective high volume production with boring depth X of 130 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.427 for the range Ø 32 - 40 mm
- Fine Boring: Insert holder size 2, 626.122, for the range Ø 32 - 40 mm, insert holder size 3, 626.123, for the range Ø 39 - 47 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 15%, and by 30% when using insert holder size 3.





Workpiece material	Boring depth X [mm]	Rough boring SW 32							Fine boring EWN/EWB 32						
		Inserts		Vc	RSS		DVS		Inserts	Vc	Allow.		Feed		
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U			Std. val. mm/Ø	Max. mm/Ø		Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	80	654.950	0.8	240	4.5	0.40	8.0	0.20	655.385	0.4	400	0.2	1.2	0.10	
	110	654.940A	0.4	240	4.5	0.35	7.5	0.20	655.385	0.4	260	0.2	1.2	0.10	
	130	654.940A	0.4	160	4.0	0.30	7.0	0.17	655.375	0.2	160	0.2	1.0	0.06	
	160	654.930A	0.2	80	3.5	0.30	5.5	0.15	655.375	0.2	80	0.2	0.8	0.06	
	190	654.940A	0.4	180	3.0	0.30	4.5	0.15	655.375	0.2	200	0.2	1.2	0.06	
	230	654.930A	0.2	120	2.0	0.25	3.5	0.12	655.363	0.1	100	0.1	0.9	0.04	
	300	654.930A	0.2	40	1.5	0.25	3.0	0.12	655.363	0.1	40	0.1	0.7	0.04	
	80	654.950	0.8	220	4.5	0.35	8.0	0.17	655.385	0.4	400	0.2	1.2	0.10	
	110	654.940A	0.4	220	4.5	0.30	7.5	0.17	655.385	0.4	260	0.2	1.2	0.10	
	130	654.940A	0.4	160	4.0	0.30	7.0	0.15	655.375	0.2	160	0.2	1.0	0.06	
	160	654.930A	0.2	80	3.5	0.30	5.5	0.12	655.375	0.2	80	0.2	0.8	0.06	
	190	654.940A	0.4	180	3.0	0.25	4.5	0.15	655.375	0.2	200	0.2	1.2	0.06	
	230	654.930A	0.2	120	2.0	0.25	3.5	0.12	655.363	0.1	100	0.1	0.9	0.04	
	300	654.930A	0.2	40	1.5	0.25	3.0	0.12	655.363	0.1	40	0.1	0.7	0.04	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	80	654.955	0.8	200	4.0	0.35	7.5	0.17	655.318	0.4	320	0.2	1.0	0.10
		110	654.945	0.4	180	4.0	0.30	7.0	0.17	655.318	0.4	240	0.2	1.0	0.10
		130	654.945	0.4	140	3.5	0.30	6.0	0.15	655.319	0.2	150	0.2	0.8	0.06
		160	654.935	0.2	80	3.0	0.30	5.0	0.15	655.319	0.2	70	0.2	0.6	0.06
		190	654.945	0.4	160	2.5	0.25	4.0	0.12	655.319	0.2	180	0.2	1.0	0.06
		230	654.935	0.2	100	2.0	0.25	3.5	0.12	655.369	0.1	100	0.1	0.7	0.04
		300	654.935	0.2	40	1.5	0.25	3.0	0.12	655.369	0.1	40	0.1	0.6	0.04
		80	654.955	0.8	160	4.0	0.35	7.0	0.17	655.318	0.4	280	0.2	1.0	0.10
		110	654.945	0.4	140	4.0	0.30	6.5	0.17	655.318	0.4	220	0.2	1.0	0.10
		130	654.945	0.4	110	3.5	0.30	6.0	0.15	655.319	0.2	150	0.2	0.8	0.06
160		654.935	0.2	70	3.0	0.30	5.0	0.15	655.319	0.2	70	0.2	0.6	0.06	
190		654.945	0.4	140	2.5	0.25	4.0	0.12	655.319	0.2	160	0.2	1.0	0.06	
230	654.935	0.2	80	2.0	0.25	3.5	0.12	655.369	0.1	80	0.1	0.7	0.04		
300	654.935	0.2	40	1.5	0.25	3.0	0.12	655.369	0.1	40	0.1	0.6	0.04		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	80	654.952	0.8	240	7.0	0.40	10.0	0.20	655.393	0.8	350	0.2	1.3	0.14	
	110	654.942	0.4	240	6.0	0.35	9.0	0.18	655.383	0.4	300	0.2	1.3	0.10	
	130	654.942	0.4	160	5.5	0.30	8.0	0.15	655.383	0.4	160	0.2	1.1	0.10	
	160	654.935	0.2	80	5.0	0.25	7.0	0.12	655.373	0.2	80	0.2	0.8	0.06	
	190	654.942	0.4	180	4.5	0.25	6.0	0.12	655.383	0.4	200	0.2	1.2	0.10	
	230	654.935	0.2	120	3.5	0.25	5.0	0.12	655.373	0.2	100	0.1	1.0	0.06	
300	654.935	0.2	40	2.5	0.25	4.0	0.12	655.363	0.1	40	0.1	0.7	0.04		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to use the balanceable fine boring heads, e.g. 309.301 or 310.305A and to balance the complete tool assembly.

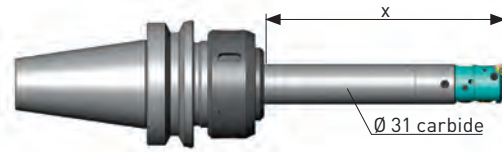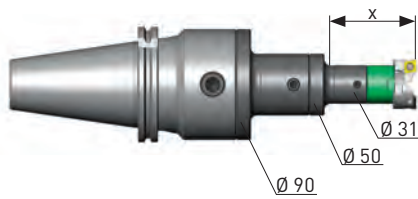

Workpiece material	Boring depth X [mm]	Rough boring SW 32							Fine boring EWN/EWB 32						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	80	654.952	0.8	220	7.0	0.40	10.0	0.20	655.393	0.8	350	0.2	1.2	0.14	
	110	654.942	0.4	220	6.0	0.35	9.0	0.18	655.383	0.4	300	0.2	1.2	0.10	
	130	654.942	0.4	150	5.5	0.30	8.0	0.15	655.383	0.4	160	0.2	1.0	0.10	
	160	654.935	0.2	80	5.0	0.25	7.0	0.12	655.373	0.2	70	0.2	0.7	0.06	
	190	654.942	0.4	180	4.5	0.25	6.0	0.12	655.383	0.4	200	0.2	1.2	0.10	
	230	654.935	0.2	120	3.5	0.25	5.0	0.12	655.373	0.2	100	0.1	0.9	0.06	
	300	654.935	0.2	40	2.5	0.25	4.0	0.12	655.363	0.1	40	0.1	0.7	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	80	654.955	0.8	200	4.5	0.35	8.0	0.17	655.318	0.4	320	0.2	1.0	0.10
		110	654.945	0.4	180	4.5	0.30	7.0	0.17	655.318	0.4	240	0.2	1.0	0.10
		130	654.945	0.4	140	4.0	0.30	6.0	0.15	655.319	0.2	150	0.2	0.8	0.06
		160	654.935	0.2	80	3.5	0.30	5.0	0.15	655.319	0.2	70	0.2	0.6	0.06
		190	654.945	0.4	160	3.0	0.25	4.0	0.12	655.319	0.2	180	0.2	1.0	0.06
		230	654.935	0.2	100	2.0	0.25	3.5	0.12	655.369	0.1	100	0.1	0.7	0.04
		300	654.935	0.2	40	1.5	0.25	3.0	0.12	655.369	0.1	40	0.1	0.6	0.04
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	654.987	0.8	750	6.0	0.40	9.0	0.20	655.398	0.8	850	0.2	1.5	0.14	
	110	654.987	0.8	400	5.5	0.40	8.0	0.20	655.398	0.8	400	0.2	1.5	0.14	
	130	654.987	0.8	260	5.0	0.40	7.0	0.20	655.388	0.4	280	0.2	1.2	0.10	
	160	654.977	0.4	120	4.0	0.30	7.0	0.17	655.378	0.2	140	0.2	1.0	0.06	
	190	654.987	0.8	240	4.0	0.30	6.0	0.17	655.388	0.4	300	0.2	1.2	0.10	
	230	654.977	0.4	160	3.0	0.25	5.0	0.12	655.378	0.2	160	0.1	1.0	0.06	
	300	654.977	0.4	70	2.0	0.25	4.0	0.12	655.378	0.2	70	0.1	0.8	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	80	654.959	0.8	550	6.0	0.40	9.0	0.20	655.320	0.8	650	0.2	1.5	0.14
		110	654.959	0.8	380	5.5	0.40	8.0	0.20	655.320	0.8	400	0.2	1.5	0.14
		130	654.959	0.8	260	5.0	0.40	7.0	0.20	655.318	0.4	280	0.2	1.2	0.10
160		654.949	0.4	120	4.0	0.30	7.0	0.17	655.319	0.2	140	0.2	1.0	0.06	
190		654.959	0.8	240	4.0	0.30	6.0	0.17	655.318	0.4	300	0.2	1.2	0.10	
230		654.949	0.4	160	3.0	0.25	5.0	0.12	655.319	0.2	160	0.1	1.0	0.06	
S Titanium 3.7164	80	654.957	0.8	120	4.0	0.35	7.0	0.17	655.318	0.4	120	0.2	1.2	0.10	
	110	654.957	0.8	120	4.0	0.35	7.0	0.17	655.318	0.4	120	0.2	1.2	0.10	
	130	654.947	0.4	90	3.5	0.30	6.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	160	654.947	0.4	60	3.0	0.25	5.0	0.12	655.319	0.2	80	0.2	0.8	0.06	
	190	654.947	0.4	90	3.0	0.25	5.0	0.12	655.319	0.2	120	0.2	1.2	0.06	
	230	654.947	0.4	60	2.5	0.25	4.0	0.12	655.369	0.1	70	0.1	0.9	0.04	
	300	654.937	0.2	25	2.0	0.20	3.0	0.12	655.369	0.1	40	0.1	0.7	0.04	
	Ni-basic-, Co-basic-, Alloys	80	654.957	0.8	50	3.5	0.30	6.0	0.15	655.326	0.4	50	0.2	0.8	0.10
		110	654.947	0.4	35	3.0	0.30	5.0	0.15	655.326	0.4	50	0.2	0.8	0.10
		130	654.947	0.4	35	2.5	0.25	4.5	0.12	655.316	0.2	40	0.1	0.8	0.06
		160	654.937	0.2	30	2.0	0.20	4.0	0.10	655.316	0.2	30	0.1	0.6	0.06
		190	654.947	0.4	30	2.0	0.20	4.0	0.10	655.316	0.2	40	0.1	0.6	0.06
		230	654.937	0.2	30	2.0	0.20	3.0	0.10	655.316	0.2	25	0.1	0.6	0.06



**Remark:**

For a cost effective high volume production with boring depth X of 190 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.437 for the range Ø 41 - 51 mm
- Fine Boring: Insert holder size 2, 626.132, for the range Ø 41 - 51mm, insert holder size 3, 626.133, for the range Ø 50 - 60 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced - by 10%, and by 20% when using insert holder size 3.





Workpiece material	Boring depth X [mm]	Rough boring SW 41							Fine boring EWN/EWB/EWE 41							
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed		
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U		
P	Steel < 450 N/mm <sup>2</sup>	100	654.950	0.8	240	6.0	0.50	10.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
		160	654.940A	0.4	160	5.5	0.40	9.0	0.20	655.324	0.4	200	0.2	2.0	0.10	
		200	654.930A	0.2	100	4.5	0.30	7.5	0.15	655.375	0.2	100	0.2	2.0	0.06	
		1.0037	240	654.940A	0.4	220	5.0	0.40	8.0	0.20	655.385	0.4	240	0.2	1.5	0.10
		1.0401	280	654.930A	0.2	150	4.0	0.30	7.0	0.15	655.375	0.2	240	0.2	1.5	0.06
		1.0715	340	654.930A	0.2	80	3.5	0.30	6.0	0.15	655.375	0.2	200	0.1	0.9	0.06
		400	654.930A	0.2	40	3.0	0.30	5.5	0.15	655.363	0.1	150	0.1	0.9	0.04	
		Steel 450-850 N/mm <sup>2</sup>	100	654.950	0.8	220	6.0	0.45	10.0	0.22	655.334	0.8	450	0.2	2.5	0.14
	160		654.940A	0.4	160	5.5	0.40	9.0	0.20	655.324	0.4	200	0.2	2.0	0.10	
	200		654.930A	0.2	100	4.5	0.30	7.5	0.15	655.375	0.2	100	0.2	2.0	0.06	
	1.0503		240	654.940A	0.4	220	5.0	0.35	8.0	0.17	655.385	0.4	240	0.2	1.5	0.10
	1.1141		280	654.930A	0.2	150	4.0	0.30	7.0	0.15	655.375	0.2	240	0.2	1.5	0.06
	1.1191		340	654.930A	0.2	80	3.5	0.30	6.0	0.15	655.375	0.2	200	0.1	0.9	0.06
	1.5752		400	654.930A	0.2	40	3.0	0.25	5.5	0.15	655.363	0.1	150	0.1	0.9	0.04
	Steel 850-1200 N/mm <sup>2</sup>		100	654.955	0.8	200	5.5	0.45	9.0	0.22	655.320	0.8	320	0.2	2.2	0.14
		160	654.945	0.4	150	5.0	0.40	8.0	0.20	655.318	0.4	180	0.2	1.8	0.10	
		1.2083	200	654.935	0.2	100	4.0	0.30	7.0	0.15	655.319	0.2	100	0.2	1.8	0.06
		1.2294	240	654.945	0.4	180	4.0	0.35	7.5	0.17	655.318	0.4	220	0.2	1.2	0.10
		1.2312	280	654.935	0.2	140	3.5	0.30	6.0	0.15	655.319	0.2	240	0.2	1.2	0.06
		1.2344	340	654.935	0.2	80	3.0	0.30	5.0	0.15	655.319	0.2	200	0.1	0.7	0.06
		1.2764	400	654.935	0.2	40	3.0	0.25	5.0	0.15	655.369	0.1	150	0.1	0.7	0.04
		M	Stainless steels, ferritic, martensitic	100	654.955	0.8	200	5.5	0.45	9.0	0.22	655.320	0.8	320	0.2	2.2
	160			654.945	0.4	150	5.0	0.40	8.0	0.20	655.318	0.4	180	0.2	1.8	0.10
	200			654.935	0.2	100	4.0	0.30	7.0	0.15	655.319	0.2	100	0.2	1.8	0.06
1.4016	240			654.945	0.4	180	4.0	0.35	7.5	0.17	655.318	0.4	220	0.2	1.2	0.10
1.4024	280			654.935	0.2	140	3.5	0.30	6.0	0.15	655.319	0.2	220	0.2	1.2	0.06
1.4034	340			654.935	0.2	80	3.0	0.30	5.0	0.15	655.319	0.2	200	0.1	0.7	0.06
Stainless steels, austenitic	100		654.955	0.8	180	5.5	0.45	8.5	0.22	655.320	0.8	280	0.2	2.2	0.14	
	160		654.945	0.4	140	5.0	0.40	8.0	0.20	655.318	0.4	160	0.2	1.8	0.10	
	1.4301		200	654.935	0.2	100	4.0	0.30	6.0	0.15	655.319	0.2	100	0.2	1.8	0.06
	1.4311		240	654.945	0.4	160	4.0	0.35	7.0	0.17	655.318	0.4	200	0.2	1.2	0.10
	1.4401		280	654.935	0.2	120	3.5	0.30	6.0	0.15	655.319	0.2	200	0.2	1.2	0.06
	1.4435		340	654.935	0.2	80	3.0	0.30	5.0	0.15	655.319	0.2	200	0.1	0.7	0.06
K	Gray cast iron	100	654.952	0.8	240	9.0	0.45	15.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
		160	654.942	0.4	160	8.0	0.40	13.0	0.25	655.302A	0.4	240	0.2	2.5	0.10	
		200	654.935	0.2	100	6.0	0.30	10.0	0.20	655.301A	0.2	100	0.2	2.0	0.06	
		GG 15	240	654.942	0.4	200	7.0	0.35	12.0	0.20	655.302A	0.4	240	0.2	2.0	0.10
	GG 20	280	654.935	0.2	140	6.0	0.30	10.0	0.15	655.301A	0.2	200	0.2	1.5	0.06	
	GG 25	340	654.935	0.2	80	5.0	0.30	8.0	0.15	655.301A	0.2	200	0.1	0.9	0.06	
	GG 30	400	654.935	0.2	40	4.0	0.30	7.0	0.15	655.363	0.1	150	0.1	0.9	0.04	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to use the balanceable fine boring heads, e.g. 309.401 or 310.405A and to balance the complete tool assembly.

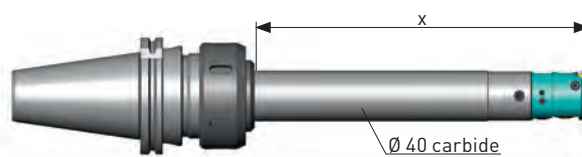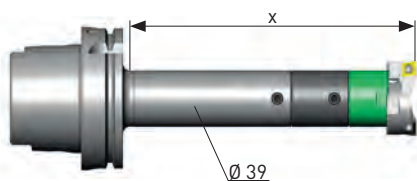

Workpiece material	Boring depth X [mm]	Rough boring SW 41							Fine boring EW/EWB/EWE 41						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	100	654.952	0.8	220	9.0	0.45	15.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	160	654.942	0.4	160	8.0	0.40	13.0	0.25	655.380	0.4	240	0.2	2.0	0.10	
	200	654.935	0.2	100	6.0	0.30	10.0	0.20	655.370	0.2	100	0.2	2.0	0.06	
	240	654.942	0.4	200	7.0	0.35	12.0	0.20	655.380	0.4	240	0.2	1.5	0.10	
	280	654.935	0.2	140	6.0	0.30	10.0	0.15	655.370	0.2	240	0.2	1.5	0.06	
	340	654.935	0.2	80	5.0	0.30	8.0	0.15	655.370	0.2	200	0.1	0.9	0.06	
	400	654.935	0.2	40	4.0	0.30	7.0	0.15	655.363	0.1	150	0.1	0.9	0.04	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	100	654.955	0.8	200	6.0	0.45	10.0	0.22	655.320	0.8	320	0.2	2.2	0.14
	160	654.945	0.4	150	5.5	0.40	9.0	0.20	655.318	0.4	180	0.2	1.8	0.10	
	200	654.935	0.2	100	4.5	0.30	7.5	0.15	655.319	0.2	100	0.2	1.8	0.06	
	240	654.945	0.4	180	5.0	0.35	8.0	0.17	655.318	0.4	220	0.2	1.2	0.10	
	280	654.935	0.2	140	4.0	0.30	7.0	0.15	655.319	0.2	220	0.2	1.2	0.06	
	340	654.935	0.2	80	3.5	0.30	6.0	0.15	655.319	0.2	200	0.1	0.7	0.06	
	400	654.935	0.2	40	3.0	0.25	5.5	0.15	655.369	0.1	150	0.1	0.7	0.04	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	100	654.987	0.8	850	7.0	0.50	11.0	0.25	655.398	0.8	1000	0.2	2.5	0.14	
	160	654.987	0.8	280	6.0	0.45	9.0	0.25	655.388	0.4	380	0.2	2.5	0.10	
	200	654.977	0.4	200	5.0	0.35	7.5	0.20	655.378	0.2	180	0.2	2.5	0.06	
	240	654.987	0.8	280	6.0	0.40	9.0	0.22	655.388	0.4	260	0.2	2.0	0.10	
	280	654.977	0.4	200	5.0	0.35	7.5	0.17	655.378	0.2	240	0.2	2.0	0.06	
	340	654.977	0.4	100	4.0	0.30	6.0	0.15	655.378	0.2	200	0.2	1.0	0.06	
	400	654.977	0.4	60	4.0	0.30	6.0	0.15	655.363	0.1	150	0.2	1.0	0.04	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	100	654.959	0.8	650	7.0	0.50	11.0	0.25	655.320	0.8	650	0.2	2.5	0.14
	160	654.959	0.8	280	6.0	0.45	9.0	0.25	655.318	0.4	380	0.2	2.5	0.10	
	200	654.949	0.4	200	5.0	0.35	7.5	0.20	655.319	0.2	180	0.2	2.5	0.06	
	240	654.959	0.8	280	6.0	0.40	9.0	0.22	655.318	0.4	260	0.2	2.0	0.10	
	280	654.949	0.4	200	5.0	0.35	7.5	0.17	655.319	0.2	250	0.2	2.0	0.06	
	340	654.949	0.4	100	4.0	0.30	6.0	0.15	655.319	0.2	200	0.2	1.0	0.06	
	400	654.949	0.4	60	4.0	0.30	6.0	0.15	655.369	0.1	150	0.2	1.0	0.04	
S Titanium 3.7164	100	654.957	0.8	120	5.0	0.45	9.0	0.22	655.320	0.8	120	0.2	2.5	0.14	
	160	654.947	0.4	120	4.5	0.40	8.0	0.20	655.318	0.4	120	0.2	2.0	0.10	
	200	654.937	0.2	80	4.0	0.30	7.0	0.15	655.319	0.2	80	0.2	2.0	0.06	
	240	654.947	0.4	100	4.0	0.35	7.5	0.17	655.318	0.4	120	0.2	1.5	0.10	
	280	654.937	0.2	80	3.5	0.25	7.0	0.15	655.319	0.2	100	0.2	1.5	0.06	
	340	654.937	0.2	60	3.0	0.25	6.0	0.15	655.319	0.2	80	0.1	0.9	0.06	
	400	654.937	0.2	40	3.0	0.25	5.0	0.15	655.369	0.1	70	0.1	0.9	0.04	
	Ni-basic-, Co-basic-, Alloys	100	654.957	0.8	50	4.0	0.40	8.0	0.20	655.326	0.4	50	0.2	1.0	0.10
	160	654.947	0.4	50	3.5	0.35	7.0	0.17	655.326	0.4	50	0.2	1.0	0.10	
	200	654.937	0.2	30	3.0	0.30	5.0	0.15	655.316	0.2	40	0.2	1.0	0.06	
	240	654.937	0.2	40	3.5	0.30	6.0	0.15	655.326	0.4	50	0.1	0.8	0.10	
	280	654.937	0.2	30	3.0	0.20	5.0	0.10	655.316	0.2	50	0.1	0.8	0.06	
	340	654.937	0.2	30	3.0	0.20	4.0	0.10	655.316	0.2	40	0.1	0.6	0.06	

**Remark:**



For a cost effective high volume production with boring depth X of 240 mm and deeper, carbide bars have to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.447 for the range Ø 53 - 66 mm
- Fine Boring: Insert holder size 2, 626.142, for the range Ø 50 - 63 mm, insert holder size 3, 626.143, for the range Ø 61 - 74 mm

The given cutting data are valid for insert holder size 1. When using insert holder size 2, the cutting data have to be reduced by 10%, and by 20% when using insert holder size 3.



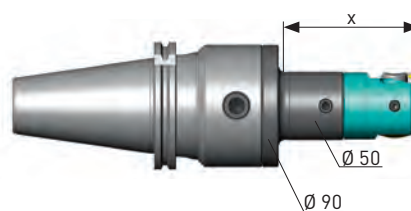
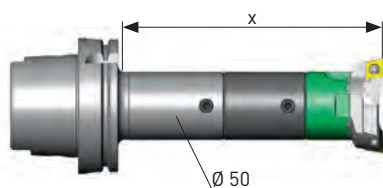


Workpiece material	Boring depth X [mm]	Rough boring SW 53							Fine boring EWN/EWB/EWE 53					
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	100	654.990A	0.8	250	10.0	0.55	16.0	0.30	655.334	0.8	450	0.2	2.5	0.14
	130	654.990A	0.8	250	10.0	0.55	16.0	0.30	655.334	0.8	320	0.2	2.5	0.14
	160	654.990A	0.8	200	8.0	0.55	13.0	0.30	655.324	0.4	200	0.2	2.5	0.10
	200	654.993A	0.4	125	6.0	0.35	10.0	0.20	655.324	0.4	150	0.2	2.0	0.10
	260	654.993A	0.4	40	5.0	0.35	8.0	0.20	655.375	0.2	240	0.2	1.5	0.06
	310	654.993A	0.4	80	5.0	0.35	8.0	0.20	655.375	0.2	200	0.2	1.0	0.06
	350	654.993A	0.4	80	5.0	0.35	8.0	0.20	655.375	0.2	150	0.2	1.0	0.06
	100	654.990A	0.8	230	10.0	0.50	16.0	0.25	655.334	0.8	450	0.2	2.5	0.14
	130	654.990A	0.8	230	10.0	0.50	16.0	0.25	655.334	0.8	320	0.2	2.5	0.14
	160	654.990A	0.8	200	8.0	0.50	13.0	0.25	655.324	0.4	200	0.2	2.5	0.10
	200	654.993A	0.4	125	6.0	0.30	10.0	0.15	655.324	0.4	150	0.2	2.0	0.10
	260	654.993A	0.4	40	5.0	0.30	8.0	0.15	655.375	0.2	240	0.2	1.5	0.06
	310	654.993A	0.4	80	5.0	0.30	8.0	0.15	655.375	0.2	200	0.2	1.0	0.06
	350	654.993A	0.4	80	5.0	0.30	8.0	0.15	655.375	0.2	150	0.2	1.0	0.06
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	100	654.965	0.8	200	9.0	0.50	15.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	130	654.965	0.8	200	9.0	0.50	15.0	0.25	655.320	0.8	300	0.2	2.0	0.14
	160	654.965	0.8	180	7.5	0.50	12.0	0.25	655.318	0.4	200	0.2	2.0	0.10
	200	654.964	0.4	120	6.0	0.30	10.0	0.15	655.318	0.4	140	0.2	1.3	0.10
	260	654.964	0.4	40	5.0	0.30	8.0	0.15	655.319	0.2	240	0.2	1.3	0.06
	310	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	200	0.2	0.8	0.06
	350	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	150	0.2	0.8	0.06
	100	654.965	0.8	160	9.0	0.50	15.0	0.25	655.320	0.8	300	0.2	2.0	0.14
	130	654.965	0.8	160	9.0	0.50	15.0	0.25	655.320	0.8	280	0.2	2.0	0.14
	160	654.965	0.8	140	7.5	0.50	12.0	0.25	655.318	0.4	180	0.2	2.0	0.10
	200	654.964	0.4	120	6.0	0.30	10.0	0.15	655.318	0.4	120	0.2	1.3	0.10
	260	654.964	0.4	40	5.0	0.30	8.0	0.15	655.319	0.2	200	0.2	1.3	0.06
	310	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	200	0.2	0.8	0.06
	350	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	150	0.2	0.8	0.06
K Gray cast iron GG 15 GG 20 GG 25 GG 30	100	654.991	0.8	250	14.0	0.55	22.0	0.30	655.303A	0.8	350	0.2	2.5	0.14
	130	654.991	0.8	250	14.0	0.55	22.0	0.30	655.303A	0.8	300	0.2	2.5	0.14
	160	654.991	0.8	200	12.0	0.55	18.0	0.30	655.302A	0.4	200	0.2	2.5	0.10
	200	654.989	0.4	125	9.0	0.35	15.0	0.20	655.302A	0.4	140	0.2	2.0	0.10
	260	654.989	0.4	40	7.0	0.35	10.0	0.20	655.302A	0.4	200	0.2	1.5	0.10
	310	654.989	0.4	80	7.0	0.35	10.0	0.20	655.301A	0.2	200	0.2	1.0	0.06
	350	654.989	0.4	80	7.0	0.35	10.0	0.20	655.301A	0.2	150	0.2	1.0	0.06

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to use the balanceable fine boring heads, e.g. 309.501 or 310.505A and to balance the complete tool assembly.

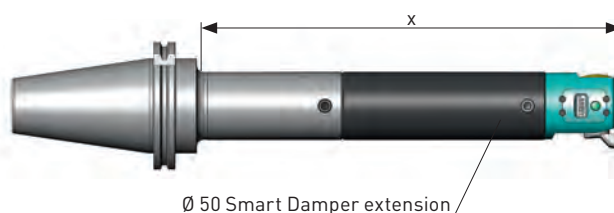



Workpiece material	Boring depth X [mm]	Rough boring SW 53							Fine boring EWN/EWB/EWE 53						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	100	654.991	0.8	220	14.0	0.55	22.0	0.30	655.390	0.8	350	0.2	2.5	0.14	
	130	654.991	0.8	220	14.0	0.55	22.0	0.30	655.390	0.8	300	0.2	2.5	0.14	
	160	654.991	0.8	200	12.0	0.55	18.0	0.30	655.380	0.4	200	0.2	2.5	0.10	
	200	654.989	0.4	125	9.0	0.35	15.0	0.20	655.380	0.4	140	0.2	2.0	0.10	
	260	654.989	0.4	40	7.0	0.35	10.0	0.20	655.370	0.2	240	0.2	1.5	0.06	
	310	654.989	0.4	80	7.0	0.35	10.0	0.20	655.370	0.2	200	0.2	1.0	0.06	
	350	654.989	0.4	80	7.0	0.35	10.0	0.20	655.370	0.2	150	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	100	654.965	0.8	200	10.0	0.50	16.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	130	654.965	0.8	200	10.0	0.50	16.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	160	654.965	0.8	180	8.0	0.50	13.0	0.25	655.318	0.4	200	0.2	2.0	0.10	
	200	654.964	0.4	120	6.0	0.30	10.0	0.15	655.318	0.4	140	0.2	1.3	0.10	
	260	654.964	0.4	40	5.0	0.30	8.0	0.15	655.319	0.2	220	0.2	1.3	0.06	
	310	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	200	0.2	0.8	0.06	
	350	654.964	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	150	0.2	0.8	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	100	654.992	0.8	1000	12.0	0.55	18.0	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	130	654.992	0.8	750	12.0	0.55	18.0	0.30	655.398	0.8	750	0.2	2.5	0.14	
	160	654.992	0.8	350	10.0	0.55	16.0	0.30	655.398	0.8	400	0.2	2.5	0.14	
	200	654.992	0.8	200	8.0	0.55	14.0	0.30	655.388	0.4	220	0.2	2.5	0.10	
	260	654.995	0.4	70	7.0	0.35	10.0	0.20	655.388	0.4	240	0.2	2.0	0.10	
	310	654.995	0.4	100	7.0	0.35	10.0	0.20	655.378	0.2	200	0.2	1.5	0.06	
	350	654.995	0.4	100	7.0	0.35	10.0	0.20	655.378	0.2	150	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	100	654.979	0.8	650	12.0	0.55	18.0	0.30	655.320	0.8	650	0.2	2.5	0.14
	130	654.979	0.8	650	12.0	0.55	18.0	0.30	655.320	0.8	650	0.2	2.5	0.14	
	160	654.979	0.8	350	10.0	0.55	16.0	0.30	655.320	0.8	400	0.2	2.5	0.14	
	200	654.979	0.8	200	8.0	0.55	14.0	0.30	655.318	0.4	220	0.2	2.5	0.10	
	260	654.978	0.4	70	7.0	0.35	10.0	0.20	655.318	0.4	250	0.2	2.0	0.10	
	310	654.978	0.4	100	7.0	0.35	10.0	0.20	655.319	0.2	200	0.2	1.5	0.06	
	350	654.978	0.4	100	7.0	0.35	10.0	0.20	655.319	0.2	150	0.2	1.5	0.06	
S Titanium 3.7164	100	654.969	0.8	120	9.0	0.50	15.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	130	654.969	0.8	120	9.0	0.50	15.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	160	654.968	0.4	120	7.0	0.30	12.0	0.15	655.318	0.4	100	0.2	2.5	0.10	
	200	654.968	0.4	100	6.0	0.30	10.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	260	654.968	0.4	80	5.0	0.30	8.0	0.15	655.319	0.2	100	0.2	1.5	0.06	
	310	654.968	0.4	60	5.0	0.30	8.0	0.15	655.319	0.2	80	0.2	1.0	0.06	
	350	654.968	0.4	60	5.0	0.30	8.0	0.15	655.319	0.2	70	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	100	654.969	0.8	50	7.0	0.50	12.0	0.25	655.326	0.4	50	0.2	1.0	0.10
	130	654.969	0.8	50	7.0	0.50	12.0	0.25	655.326	0.4	50	0.2	1.0	0.10	
	160	654.968	0.4	40	5.0	0.30	8.0	0.15	655.326	0.4	40	0.2	1.0	0.10	
	200	654.968	0.4	40	4.0	0.30	7.0	0.15	655.316	0.2	30	0.1	0.8	0.06	
	260	654.968	0.4	30	3.0	0.30	5.0	0.15	655.316	0.2	50	0.1	0.8	0.06	
	310	654.968	0.4	30	3.0	0.30	5.0	0.15	655.316	0.2	40	0.1	0.6	0.06	

**Remark:**

For boring depths X ≥ 310 mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.457 for the range Ø 69 - 86 mm
- Fine Boring: Insert holder size 2, 626.152, for the range Ø 65 - 82 mm, insert holder size 3, 626.153, for the range Ø 78 - 95 mm

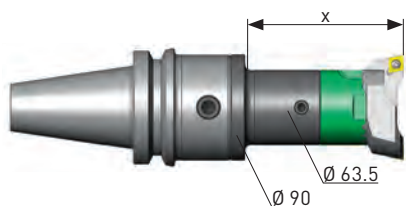


Workpiece material	Boring depth X [mm]	Rough boring SW 68							Fine boring EWN/EWB/EWE 68						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	100	654.990A	0.8	250	13.0	0.55	21.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
	160	654.990A	0.8	250	12.0	0.55	19.0	0.30	655.334	0.8	400	0.2	2.5	0.14	
	200	654.990A	0.8	230	11.0	0.55	17.0	0.30	655.334	0.8	250	0.2	2.5	0.14	
	260	654.993A	0.4	160	9.0	0.35	14.0	0.20	655.324	0.4	180	0.2	2.0	0.10	
	320	654.993A	0.4	60	7.0	0.35	12.0	0.20	655.375	0.2	80	0.2	1.5	0.06	
	340	654.993A	0.4	150	7.0	0.35	12.0	0.20	655.375	0.2	200	0.2	1.0	0.06	
	400	654.993A	0.4	120	7.0	0.35	12.0	0.20	655.375	0.2	150	0.2	1.0	0.06	
	100	654.990A	0.8	230	13.0	0.50	21.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
	160	654.990A	0.8	230	12.0	0.50	19.0	0.25	655.334	0.8	400	0.2	2.5	0.14	
	200	654.990A	0.8	210	11.0	0.50	17.0	0.25	655.334	0.8	250	0.2	2.5	0.14	
	260	654.993A	0.4	160	9.0	0.30	14.0	0.15	655.324	0.4	180	0.2	2.0	0.10	
	320	654.993A	0.4	60	7.0	0.30	12.0	0.15	655.375	0.2	80	0.2	1.5	0.06	
	340	654.993A	0.4	150	7.0	0.30	12.0	0.15	655.375	0.2	200	0.2	1.0	0.06	
	400	654.993A	0.4	120	7.0	0.30	12.0	0.15	655.375	0.2	150	0.2	1.0	0.06	
	100	654.965	0.8	210	12.0	0.50	20.0	0.25	655.320	0.8	350	0.2	2.0	0.14	
	160	654.965	0.8	210	11.0	0.50	18.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	200	654.965	0.8	200	10.0	0.50	16.0	0.25	655.320	0.8	240	0.2	2.0	0.14	
	260	654.964	0.4	140	8.0	0.30	13.0	0.15	655.318	0.4	160	0.2	1.8	0.10	
	320	654.964	0.4	60	6.0	0.30	10.0	0.15	655.319	0.2	80	0.2	1.3	0.06	
	340	654.964	0.4	150	6.0	0.30	10.0	0.15	655.319	0.2	200	0.2	0.8	0.06	
	400	654.964	0.4	120	6.0	0.30	10.0	0.15	655.319	0.2	150	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	100	654.965	0.8	210	12.0	0.50	20.0	0.25	655.320	0.8	350	0.2	2.0	0.14
		160	654.965	0.8	210	11.0	0.50	18.0	0.25	655.320	0.8	300	0.2	2.0	0.14
		200	654.965	0.8	200	10.0	0.50	16.0	0.25	655.320	0.8	240	0.2	2.0	0.14
260		654.964	0.4	140	8.0	0.30	13.0	0.15	655.318	0.4	160	0.2	1.8	0.10	
320		654.964	0.4	60	6.0	0.30	10.0	0.15	655.319	0.2	80	0.2	1.3	0.06	
340		654.964	0.4	150	6.0	0.30	10.0	0.15	655.319	0.2	200	0.2	0.8	0.06	
400		654.964	0.4	120	6.0	0.30	10.0	0.15	655.319	0.2	150	0.2	0.8	0.06	
100		654.965	0.8	180	12.0	0.50	20.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
160		654.965	0.8	180	11.0	0.50	18.0	0.25	655.320	0.8	250	0.2	2.0	0.14	
200		654.965	0.8	160	10.0	0.50	16.0	0.25	655.320	0.8	220	0.2	2.0	0.14	
260		654.964	0.4	140	8.0	0.30	13.0	0.15	655.318	0.4	160	0.2	1.8	0.10	
320		654.964	0.4	60	6.0	0.30	10.0	0.15	655.319	0.2	80	0.2	1.3	0.06	
340	654.964	0.4	150	6.0	0.30	10.0	0.15	655.319	0.2	200	0.2	0.8	0.06		
400	654.964	0.4	100	6.0	0.30	10.0	0.15	655.319	0.2	150	0.2	0.8	0.06		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	100	654.991	0.8	250	18.0	0.55	26.0	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	160	654.991	0.8	250	16.0	0.55	24.0	0.30	655.303A	0.8	350	0.2	2.5	0.14	
	200	654.991	0.8	230	15.0	0.55	22.0	0.30	655.303A	0.8	250	0.2	2.5	0.14	
	260	654.989	0.4	160	12.0	0.35	18.0	0.20	655.302A	0.4	160	0.2	2.0	0.10	
	320	654.989	0.4	60	9.0	0.35	14.0	0.20	655.301A	0.2	80	0.2	1.5	0.06	
	340	654.989	0.4	150	9.0	0.35	14.0	0.20	655.301A	0.2	200	0.2	1.0	0.06	
	400	654.989	0.4	100	9.0	0.35	14.0	0.20	655.301A	0.2	150	0.2	1.0	0.06	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min, we recommend to use the balanceable fine boring heads, e.g. 309.601 or 310.605A and to balance the complete tool assembly.

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.





Workpiece material	Boring depth X [mm]	Rough boring SW 68							Fine boring EWN/EWB/EWE 68						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
					mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	100	654.991	0.8	230	18.0	0.55	26.0	0.30	655.390	0.8	350	0.2	2.5	0.14	
	160	654.991	0.8	230	16.0	0.55	24.0	0.30	655.390	0.8	350	0.2	2.5	0.14	
	200	654.991	0.8	210	15.0	0.55	22.0	0.30	655.390	0.8	250	0.2	2.5	0.14	
	260	654.989	0.4	160	12.0	0.35	18.0	0.20	655.380	0.4	160	0.2	2.0	0.10	
	320	654.989	0.4	60	9.0	0.35	14.0	0.20	655.370	0.2	80	0.2	1.5	0.06	
	340	654.989	0.4	210	9.0	0.35	14.0	0.20	655.370	0.2	200	0.2	1.0	0.06	
	400	654.989	0.4	150	9.0	0.35	14.0	0.20	655.370	0.2	150	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	100	654.965	0.8	200	12.0	0.50	20.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		160	654.965	0.8	200	11.0	0.50	18.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		200	654.965	0.8	180	10.0	0.50	16.0	0.25	655.320	0.8	240	0.2	2.0	0.14
		260	654.964	0.4	160	8.0	0.30	13.0	0.15	655.318	0.4	160	0.2	2.0	0.10
		320	654.964	0.4	60	6.0	0.30	10.0	0.15	655.319	0.2	80	0.2	1.3	0.06
		340	654.964	0.4	180	6.0	0.30	10.0	0.15	655.319	0.2	200	0.2	0.8	0.06
		400	654.964	0.4	150	6.0	0.30	10.0	0.15	655.319	0.2	150	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	100	654.992	0.8	900	15.0	0.55	24.0	0.30	655.398	0.8	1200	0.2	2.5	0.14	
	160	654.992	0.8	750	14.0	0.55	22.0	0.30	655.398	0.8	750	0.2	2.5	0.14	
	200	654.992	0.8	350	12.0	0.55	20.0	0.30	655.398	0.8	350	0.2	2.5	0.14	
	260	654.992	0.8	250	10.0	0.55	16.0	0.30	655.388	0.4	250	0.2	2.5	0.10	
	320	654.995	0.4	100	8.0	0.35	14.0	0.20	655.378	0.2	100	0.2	2.5	0.06	
	340	654.995	0.4	300	8.0	0.35	14.0	0.20	655.378	0.2	300	0.2	2.0	0.06	
	400	654.995	0.4	250	8.0	0.35	14.0	0.20	655.378	0.2	250	0.2	2.0	0.06	
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	100	654.979	0.8	650	15.0	0.55	24.0	0.30	655.320	0.8	650	0.2	2.5	0.14
		160	654.979	0.8	650	14.0	0.55	22.0	0.30	655.320	0.8	650	0.2	2.5	0.14
		200	654.979	0.8	350	12.0	0.55	20.0	0.30	655.320	0.8	350	0.2	2.5	0.14
		260	654.979	0.8	250	10.0	0.55	16.0	0.30	655.318	0.4	250	0.2	2.5	0.10
		320	654.978	0.4	100	8.0	0.35	14.0	0.20	655.319	0.2	100	0.2	2.5	0.06
		340	654.978	0.4	300	8.0	0.35	14.0	0.20	655.319	0.2	300	0.2	2.0	0.06
		400	654.978	0.4	200	8.0	0.35	14.0	0.20	655.319	0.2	250	0.2	2.0	0.06
S Titanium 3.7164	100	654.969	0.8	120	12.0	0.50	20.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	160	654.969	0.8	120	11.0	0.50	18.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	200	654.969	0.8	120	10.0	0.50	16.0	0.25	655.318	0.4	100	0.2	2.5	0.10	
	260	654.968	0.4	100	8.0	0.30	13.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	320	654.968	0.4	80	6.0	0.30	10.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
	340	654.968	0.4	100	6.0	0.30	10.0	0.15	655.319	0.2	100	0.2	1.0	0.06	
	400	654.968	0.4	80	6.0	0.30	10.0	0.15	655.319	0.2	80	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	100	654.969	0.8	50	10.0	0.40	16.0	0.20	655.326	0.4	50	0.2	1.5	0.10
		160	654.969	0.8	50	9.0	0.40	14.0	0.20	655.326	0.4	50	0.2	1.5	0.10
		200	654.968	0.4	40	8.0	0.25	12.0	0.12	655.326	0.4	40	0.2	1.5	0.10
		260	654.968	0.4	40	6.0	0.25	10.0	0.12	655.316	0.2	30	0.1	1.0	0.06
		320	654.968	0.4	50	5.0	0.25	8.0	0.12	655.316	0.2	50	0.1	0.8	0.06
		340	654.968	0.4	40	5.0	0.25	8.0	0.12	655.316	0.2	40	0.1	0.6	0.06

**Remark:**

For boring depths  $X \geq 340$  mm the anti-vibration extension Smart Damper has to be used.

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holders 639.467 for the range Ø 88 - 110 mm
- Fine Boring: Insert holder size 2, 626.162, for the range Ø 94 - 126 mm, insert holder size 3, 626.163, for the range Ø 118 - 150 mm

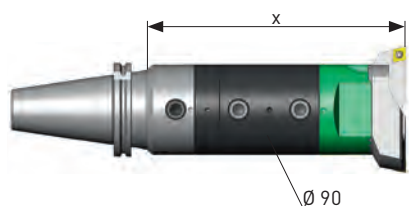

Workpiece material	Boring depth X [mm]	Rough boring SW 98							Fine boring EWN/EWB/EWE 100						
		Inserts		Vc	RSS		DVS		Inserts	Vc	Allow.		Feed		
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U			Std. val.	Max.		Ra 1.6 µm	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	160	654.990A	0.8	250	16.0	0.60	25.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	250	14.0	0.60	24.0	0.30	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	250	13.0	0.60	22.0	0.30	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	12.0	0.60	20.0	0.30	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	11.0	0.40	18.0	0.20	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	10.0	0.40	15.0	0.20	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	9.0	0.40	13.0	0.20	655.375	0.2	40	0.2	1.0	0.06	
	160	654.990A	0.8	230	16.0	0.55	25.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	230	14.0	0.55	24.0	0.25	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	230	13.0	0.55	22.0	0.25	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	12.0	0.55	20.0	0.25	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	11.0	0.35	18.0	0.15	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	10.0	0.35	15.0	0.15	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	9.0	0.35	13.0	0.15	655.375	0.2	40	0.2	1.0	0.06	
	160	654.965	0.8	210	15.0	0.55	24.0	0.25	655.320	0.8	350	0.2	2.0	0.14	
	260	654.965	0.8	210	13.0	0.55	22.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	320	654.965	0.8	210	12.0	0.55	20.0	0.25	655.318	0.4	240	0.2	2.0	0.10	
	370	654.965	0.8	180	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
	420	654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	470	654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	160	654.965	0.8	210	15.0	0.55	24.0	0.25	655.320	0.8	350	0.2	2.0	0.14
		260	654.965	0.8	210	13.0	0.55	22.0	0.25	655.320	0.8	300	0.2	2.0	0.14
		320	654.965	0.8	210	12.0	0.55	20.0	0.25	655.318	0.4	240	0.2	2.0	0.10
370		654.965	0.8	180	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470		654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
520		654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
160		654.965	0.8	180	15.0	0.55	24.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
260		654.965	0.8	180	13.0	0.55	22.0	0.25	655.320	0.8	250	0.2	2.0	0.14	
320		654.965	0.8	180	12.0	0.55	20.0	0.25	655.318	0.4	220	0.2	2.0	0.10	
370		654.965	0.8	140	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470	654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06		
520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	160	654.991	0.8	250	20.0	0.55	30.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	250	20.0	0.55	28.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	250	20.0	0.55	26.0	0.25	655.303A	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	16.0	0.55	24.0	0.25	655.302A	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.0	0.15	655.301A	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.301A	0.2	60	0.2	1.0	0.06	
520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.301A	0.2	40	0.2	1.0	0.06		



**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min we recommend to use the balanceable fine boring head 310.705.

The weight of long tools can be substantially reduced by using CKN lightweight components with equal cutting performance.





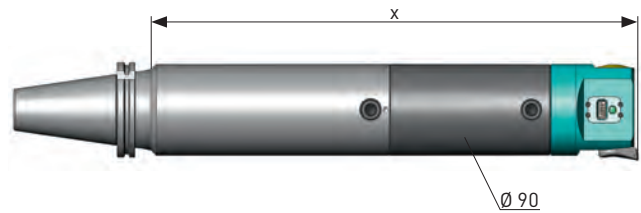

Workpiece material	Boring depth X [mm]	Rough boring SW 98							Fine boring EWN/EWB/EWE 100						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	160	654.991	0.8	230	20.0	0.55	30.00	0.25	655.390	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	230	20.0	0.55	28.00	0.25	655.390	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	230	20.0	0.55	26.00	0.25	655.390	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	16.0	0.55	24.00	0.25	655.380	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.00	0.15	655.370	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.00	0.15	655.370	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.00	0.15	655.370	0.2	40	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	160	654.965	0.8	210	15.0	0.55	24.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		260	654.965	0.8	210	13.0	0.55	22.00	0.25	655.320	0.8	320	0.2	2.0	0.14
		320	654.965	0.8	210	12.0	0.55	20.00	0.25	655.318	0.4	240	0.2	2.0	0.10
		370	654.965	0.8	180	11.0	0.55	18.00	0.25	655.318	0.4	160	0.2	1.5	0.10
		420	654.964	0.4	120	10.0	0.35	15.00	0.15	655.319	0.2	120	0.2	1.0	0.06
		470	654.964	0.4	60	9.0	0.35	13.00	0.15	655.319	0.2	60	0.2	0.8	0.06
	N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	160	654.992	0.8	900	18.0	0.55	28.00	0.25	655.398	0.8	1200	0.2	2.5	0.14
260		654.992	0.8	750	17.0	0.55	27.00	0.25	655.398	0.8	750	0.2	2.5	0.14	
320		654.992	0.8	400	16.0	0.55	25.00	0.25	655.398	0.8	400	0.2	2.5	0.14	
370		654.992	0.8	300	15.0	0.55	22.00	0.25	655.398	0.8	300	0.2	2.5	0.14	
420		654.992	0.8	180	14.0	0.55	20.00	0.25	655.388	0.4	180	0.2	2.0	0.10	
470		654.995	0.4	100	12.0	0.35	18.00	0.15	655.378	0.2	100	0.2	1.5	0.06	
520		654.995	0.4	70	10.0	0.35	16.00	0.15	655.378	0.2	70	0.2	1.5	0.06	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg		160	654.979	0.8	650	18.0	0.55	28.00	0.25	655.320	0.8	650	0.2	2.5	0.14
		260	654.979	0.8	650	17.0	0.55	27.00	0.25	655.320	0.8	650	0.2	2.5	0.14
		320	654.979	0.8	400	16.0	0.55	25.00	0.25	655.320	0.8	400	0.2	2.5	0.14
		370	654.979	0.8	300	15.0	0.55	22.00	0.25	655.318	0.4	300	0.2	2.5	0.10
		420	654.978	0.4	180	14.0	0.35	20.00	0.15	655.319	0.2	180	0.2	2.0	0.06
		470	654.978	0.4	100	12.0	0.35	18.00	0.15	655.319	0.2	100	0.2	1.5	0.06
S Titanium 3.7164		160	654.969	0.8	120	15.0	0.55	24.00	0.25	655.320	0.8	120	0.2	2.5	0.14
	260	654.969	0.8	120	13.0	0.55	22.00	0.25	655.320	0.8	120	0.2	2.5	0.14	
	320	654.969	0.8	120	12.0	0.55	20.00	0.25	655.318	0.4	100	0.2	2.5	0.10	
	370	654.968	0.4	100	11.0	0.35	18.00	0.15	655.318	0.4	80	0.2	2.0	0.10	
	420	654.968	0.4	80	10.0	0.35	15.00	0.15	655.319	0.2	70	0.2	1.5	0.06	
	470	654.968	0.4	60	9.0	0.35	13.00	0.15	655.319	0.2	60	0.2	1.0	0.06	
	520	654.968	0.4	60	8.0	0.35	12.00	0.15	655.319	0.2	40	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	160	654.969	0.8	50	12.0	0.40	18.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		260	654.969	0.8	50	11.0	0.40	18.00	0.20	655.326	0.4	50	0.2	1.5	0.10
		320	654.968	0.4	40	10.0	0.25	16.00	0.15	655.326	0.4	40	0.2	1.5	0.10
		370	654.968	0.4	40	8.0	0.25	12.00	0.15	655.316	0.2	30	0.1	1.0	0.06
		420	654.968	0.4	30	6.0	0.25	10.00	0.15	655.316	0.2	30	0.1	0.8	0.06
		470	654.968	0.4	30	6.0	0.25	10.00	0.15	655.316	0.2	30	0.1	0.6	0.06

**Extension of the boring range with additional insert holders:**

- Rough boring: Pair of insert holderse 639.477 for the range Ø 125 - 153 mm
- Fine Boring: Insert holder size 2, 626.162, for the range Ø 126 - 179 mm, insert holder size 3, 626.163, for the range Ø 150 - 203 mm

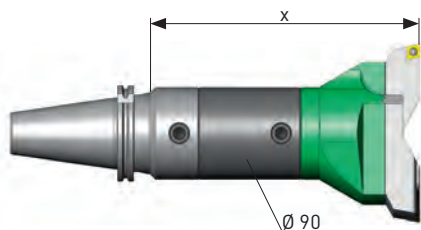



Workpiece material	Boring depth X [mm]	Rough boring SW 148							Fine boring EWN/EWE 100, EWB 150						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	mm/Ø	mm/Ø	mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	160	654.990A	0.8	250	16.0	0.60	25.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	250	14.0	0.60	24.0	0.30	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	250	13.0	0.60	22.0	0.30	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	12.0	0.60	20.0	0.30	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	11.0	0.40	18.0	0.20	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	10.0	0.40	15.0	0.20	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	9.0	0.40	13.0	0.20	655.375	0.2	40	0.2	1.0	0.06	
	160	654.990A	0.8	230	16.0	0.55	25.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	230	14.0	0.55	24.0	0.25	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	230	13.0	0.55	22.0	0.25	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	12.0	0.55	20.0	0.25	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	11.0	0.35	18.0	0.15	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	10.0	0.35	15.0	0.15	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	9.0	0.35	13.0	0.15	655.375	0.2	40	0.2	1.0	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	160	654.965	0.8	210	15.0	0.55	24.0	0.25	655.320	0.8	350	0.2	2.0	0.14
		260	654.965	0.8	210	13.0	0.55	22.0	0.25	655.320	0.8	300	0.2	2.0	0.14
		320	654.965	0.8	210	12.0	0.55	20.0	0.25	655.318	0.4	240	0.2	2.0	0.10
		370	654.965	0.8	180	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10
		420	654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06
		470	654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06
		520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
		160	654.965	0.8	180	15.0	0.55	24.0	0.25	655.320	0.8	300	0.2	2.0	0.14
		260	654.965	0.8	180	13.0	0.55	22.0	0.25	655.320	0.8	250	0.2	2.0	0.14
		320	654.965	0.8	180	12.0	0.55	20.0	0.25	655.318	0.4	220	0.2	2.0	0.10
370		654.965	0.8	140	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470	654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06		
520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	160	654.991	0.8	250	20.0	0.55	30.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	250	20.0	0.55	28.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	250	20.0	0.55	26.0	0.25	655.303A	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	16.0	0.55	24.0	0.25	655.302A	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.0	0.15	655.301A	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.301A	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.301A	0.2	40	0.2	1.0	0.06	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For cutting speeds above 400 m/min we recommend to use the balanceable fine boring head 310.706.

The weight of long tools can be substantially reduced by using CKN lightweight components with equal cutting performance.

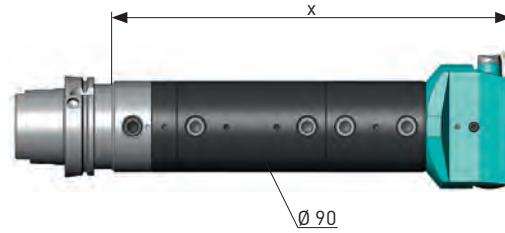


Workpiece material	Boring depth X [mm]	Rough boring SW 148							Fine boring EWN/EWE 100, EWB 150						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	160	654.991	0.8	230	20.0	0.55	30.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	230	20.0	0.55	28.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	230	20.0	0.55	26.0	0.25	655.390	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	16.0	0.55	24.0	0.25	655.380	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.0	0.15	655.370	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.370	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.370	0.2	40	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	160	654.965	0.8	210	15.0	0.55	24.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		260	654.965	0.8	210	13.0	0.55	22.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		320	654.965	0.8	210	12.0	0.55	20.0	0.25	655.318	0.4	240	0.2	2.0	0.10
		370	654.965	0.8	180	11.0	0.55	18.0	0.25	655.318	0.4	160	0.2	1.5	0.10
		420	654.964	0.4	120	10.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06
		470	654.964	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	0.8	0.06
		520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	160	654.992	0.8	900	18.0	0.55	28.0	0.25	655.398	0.8	1200	0.2	2.5	0.14	
	260	654.992	0.8	750	17.0	0.55	27.0	0.25	655.398	0.8	750	0.2	2.5	0.14	
	320	654.992	0.8	400	16.0	0.55	25.0	0.25	655.398	0.8	400	0.2	2.5	0.14	
	370	654.992	0.8	300	15.0	0.55	22.0	0.25	655.398	0.8	300	0.2	2.5	0.14	
	420	654.992	0.8	180	14.0	0.55	20.0	0.25	655.388	0.4	180	0.2	2.0	0.10	
	470	654.995	0.4	100	12.0	0.35	18.0	0.15	655.378	0.2	100	0.2	1.5	0.06	
	520	654.995	0.4	70	10.0	0.35	16.0	0.15	655.378	0.2	70	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	160	654.979	0.8	650	18.0	0.55	28.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		260	654.979	0.8	650	17.0	0.55	27.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		320	654.979	0.8	400	16.0	0.55	25.0	0.25	655.320	0.8	400	0.2	2.5	0.14
		370	654.979	0.8	300	15.0	0.55	22.0	0.25	655.318	0.4	300	0.2	2.5	0.10
		420	654.978	0.4	180	14.0	0.35	20.0	0.15	655.319	0.2	180	0.2	2.0	0.06
		470	654.978	0.4	100	12.0	0.35	18.0	0.15	655.319	0.2	100	0.2	1.5	0.06
		520	654.978	0.4	70	10.0	0.35	16.0	0.15	655.319	0.2	70	0.2	1.5	0.06
S Titanium 3.7164	160	654.969	0.8	120	15.0	0.55	24.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	260	654.969	0.8	120	13.0	0.55	22.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	320	654.969	0.8	120	12.0	0.55	20.0	0.25	655.318	0.4	100	0.2	2.5	0.10	
	370	654.968	0.4	100	11.0	0.35	18.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	420	654.968	0.4	80	10.0	0.35	15.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
	470	654.968	0.4	60	9.0	0.35	13.0	0.15	655.319	0.2	60	0.2	1.0	0.06	
	520	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	160	654.969	0.8	50	12.0	0.40	18.0	0.20	655.326	0.4	50	0.2	1.5	0.10
		260	654.969	0.8	50	11.0	0.40	18.0	0.20	655.326	0.4	50	0.2	1.5	0.10
		320	654.968	0.4	40	10.0	0.25	16.0	0.15	655.326	0.4	40	0.2	1.5	0.10
		370	654.968	0.4	40	8.0	0.25	12.0	0.15	655.316	0.2	30	0.1	1.0	0.06
		420	654.968	0.4	30	6.0	0.25	10.0	0.15	655.316	0.2	30	0.1	0.8	0.06
		470	654.968	0.4	30	6.0	0.25	10.0	0.15	655.316	0.2	30	0.1	0.6	0.06
		520	654.968	0.4	30	6.0	0.25	10.0	0.15	655.316	0.2	30	0.1	0.6	0.06

**Extension of the boring range with additional insert holders:**


- Rough boring: Pair of insert holders 639.487 for the range Ø 175 - 203 mm
- Fine Boring: Insert holder size 3, 626.163, for the range Ø 150 - 203 mm

Picture 1



RSS

Picture 2



Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752 Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	160	654.990A	0.8	250	14.0	0.60	22.0	0.30	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	250	12.0	0.60	20.0	0.30	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	250	10.0	0.60	18.0	0.30	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	9.0	0.60	16.0	0.30	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	9.0	0.40	16.0	0.20	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	8.0	0.40	14.0	0.20	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	8.0	0.40	14.0	0.20	655.375	0.2	40	0.2	1.0	0.06	
	160	654.990A	0.8	230	14.0	0.55	22.0	0.25	655.334	0.8	450	0.2	2.5	0.14	
	260	654.990A	0.8	230	12.0	0.55	20.0	0.25	655.334	0.8	400	0.2	2.5	0.14	
	320	654.990A	0.8	230	10.0	0.55	18.0	0.25	655.334	0.8	250	0.2	2.5	0.14	
	370	654.990A	0.8	180	9.0	0.55	16.0	0.25	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	9.0	0.35	16.0	0.15	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	8.0	0.35	14.0	0.15	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	8.0	0.35	14.0	0.15	655.375	0.2	40	0.2	1.0	0.06	
	160	654.965	0.8	210	13.0	0.55	20.0	0.25	655.320	0.8	350	0.2	2.0	0.14	
	260	654.965	0.8	210	11.0	0.55	19.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
	320	654.965	0.8	210	10.0	0.55	17.0	0.25	655.318	0.4	240	0.2	2.0	0.10	
	370	654.965	0.8	180	9.0	0.55	15.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
	420	654.964	0.4	120	9.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	160	654.965	0.8	210	13.0	0.55	20.0	0.25	655.320	0.8	350	0.2	2.0	0.14
		260	654.965	0.8	210	11.0	0.55	19.0	0.25	655.320	0.8	300	0.2	2.0	0.14
		320	654.965	0.8	210	10.0	0.55	17.0	0.25	655.318	0.4	240	0.2	2.0	0.10
370		654.965	0.8	180	9.0	0.55	15.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	9.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470		654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
520		654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
160		654.965	0.8	180	13.0	0.55	20.0	0.25	655.320	0.8	300	0.2	2.0	0.14	
260		654.965	0.8	180	11.0	0.55	19.0	0.25	655.320	0.8	250	0.2	2.0	0.14	
320		654.965	0.8	180	10.0	0.55	17.0	0.25	655.318	0.4	220	0.2	2.0	0.10	
370		654.965	0.8	140	9.0	0.55	15.0	0.25	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	9.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06		
520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06		
K Gray cast iron GG 15 GG 20 GG 25 GG 30	160	654.991	0.8	250	18.0	0.55	26.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	250	18.0	0.55	26.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	250	16.0	0.55	24.0	0.25	655.303A	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	14.0	0.55	22.0	0.25	655.302A	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.0	0.15	655.301A	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.301A	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.301A	0.2	40	0.2	1.0	0.06	


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.


For cutting speeds above 400 m/min we recommend to use the counter weight 318.105 and to balance it according to the table (see operating instructions).

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.

Picture 3



Picture 4



DVS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	160	654.991	0.8	230	18.0	0.55	26.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	230	18.0	0.55	26.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	320	654.991	0.8	230	16.0	0.55	24.0	0.25	655.390	0.8	250	0.2	2.5	0.14	
	370	654.991	0.8	180	14.0	0.55	22.0	0.25	655.380	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	14.0	0.35	22.0	0.15	655.370	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.370	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.370	0.2	40	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	160	654.965	0.8	210	13.0	0.55	20.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		260	654.965	0.8	210	11.0	0.55	19.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		320	654.965	0.8	210	10.0	0.55	17.0	0.25	655.318	0.4	240	0.2	2.0	0.10
		370	654.965	0.8	180	9.0	0.55	15.0	0.25	655.318	0.4	160	0.2	1.5	0.10
		420	654.964	0.4	120	9.0	0.35	15.0	0.15	655.319	0.2	120	0.2	1.0	0.06
		470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
		520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	160	654.992	0.8	900	18.0	0.55	26.0	0.25	655.398	0.8	1200	0.2	2.5	0.14	
	260	654.992	0.8	750	17.0	0.55	25.0	0.25	655.398	0.8	750	0.2	2.5	0.14	
	320	654.992	0.8	400	16.0	0.55	24.0	0.25	655.398	0.8	400	0.2	2.5	0.14	
	370	654.992	0.8	300	15.0	0.55	22.0	0.25	655.398	0.8	300	0.2	2.5	0.14	
	420	654.992	0.8	180	14.0	0.55	20.0	0.25	655.388	0.4	180	0.2	2.0	0.10	
	470	654.995	0.4	100	12.0	0.35	18.0	0.15	655.378	0.2	100	0.2	1.5	0.06	
	520	654.995	0.4	70	10.0	0.35	16.0	0.15	655.378	0.2	70	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	160	654.979	0.8	650	18.0	0.55	26.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		260	654.979	0.8	650	17.0	0.55	25.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		320	654.979	0.8	400	16.0	0.55	24.0	0.25	655.320	0.8	400	0.2	2.5	0.14
		370	654.979	0.8	300	15.0	0.55	22.0	0.25	655.318	0.4	300	0.2	2.5	0.10
		420	654.978	0.4	180	14.0	0.35	20.0	0.15	655.319	0.2	180	0.2	2.0	0.06
		470	654.978	0.4	100	12.0	0.35	18.0	0.15	655.319	0.2	100	0.2	1.5	0.06
		520	654.978	0.4	70	10.0	0.35	16.0	0.15	655.319	0.2	70	0.2	1.5	0.06
S Titanium 3.7164	160	654.969	0.8	120	13.0	0.55	20.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	260	654.969	0.8	120	11.0	0.55	19.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	320	654.969	0.8	120	10.0	0.55	17.0	0.25	655.318	0.4	100	0.2	2.5	0.10	
	370	654.968	0.4	100	9.0	0.35	15.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	420	654.968	0.4	80	9.0	0.35	15.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
	470	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	1.0	0.06	
	520	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	160	654.969	0.8	50	10.0	0.40	16.0	0.2	655.326	0.4	50	0.2	1.5	0.10
		260	654.969	0.8	50	10.0	0.40	16.0	0.2	655.326	0.4	50	0.2	1.5	0.10
		320	654.968	0.4	40	8.0	0.25	14.0	0.15	655.326	0.4	40	0.2	1.5	0.10
		370	654.968	0.4	40	8.0	0.25	10.0	0.15	655.316	0.2	30	0.1	1.0	0.06
		420	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.8	0.06
		470	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.6	0.06

**DVS rough boring**


For double offset rough boring "DVS" a longer insert holder 637.951 / CC12 or 637.953 / CC16 has to be mounted on one side of the tool assembly. The longer insert holders are coloured black.

**Extension slides:** Ø 200- 270 mm (picture 1+2), extension slides 318.222 / Ø 270 - 340 mm (picture 3+4), extension slides 318.223


**Extension of the boring range for fine boring with additional insert holders:** With insert holder size 2, 626.272 the boring range can be extended by 25 mm/Ø, and with insert holder size 3, 626.273 by 50 mm/Ø.



Picture 1



Picture 2



RSS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200					
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	160	654.990A	0.8	250	12.0	0.60	20.0	0.30	655.334	0.8	450	0.2	2.5	0.14
	260	654.990A	0.8	250	10.0	0.60	18.0	0.30	655.334	0.8	400	0.2	2.5	0.14
	320	654.993A	0.4	250	9.0	0.40	16.0	0.20	655.324	0.4	250	0.2	2.5	0.10
	370	654.993A	0.4	180	9.0	0.40	16.0	0.20	655.324	0.4	180	0.2	2.0	0.10
	420	654.993A	0.4	120	8.0	0.40	14.0	0.20	655.375	0.2	120	0.2	1.5	0.06
	470	654.993A	0.4	60	8.0	0.40	14.0	0.20	655.375	0.2	60	0.2	1.0	0.06
	520	654.993A	0.4	40	8.0	0.40	14.0	0.20	655.375	0.2	40	0.2	1.0	0.06
	160	654.990A	0.8	230	12.0	0.55	20.0	0.25	655.334	0.8	450	0.2	2.5	0.14
	260	654.990A	0.8	230	10.0	0.55	18.0	0.25	655.334	0.8	400	0.2	2.5	0.14
	320	654.993A	0.4	230	9.0	0.35	16.0	0.15	655.324	0.4	250	0.2	2.5	0.10
	370	654.993A	0.4	180	9.0	0.35	16.0	0.15	655.324	0.4	180	0.2	2.0	0.10
	420	654.993A	0.4	120	8.0	0.35	14.0	0.15	655.375	0.2	120	0.2	1.5	0.06
	470	654.993A	0.4	60	8.0	0.35	14.0	0.15	655.375	0.2	60	0.2	1.0	0.06
	520	654.993A	0.4	40	8.0	0.35	14.0	0.15	655.375	0.2	40	0.2	1.0	0.06
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	160	654.965	0.8	210	11.0	0.55	18.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14
	320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10
	370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
	160	654.965	0.8	210	11.0	0.55	18.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14
	320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10
	370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
K Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571 Gray cast iron	160	654.965	0.8	210	11.0	0.55	18.0	0.25	655.320	0.8	350	0.2	2.0	0.14
	260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14
	320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10
	370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
	160	654.965	0.8	180	11.0	0.55	18.0	0.25	655.320	0.8	300	0.2	2.0	0.14
	260	654.964	0.4	180	10.0	0.35	17.0	0.15	655.320	0.8	250	0.2	2.0	0.14
	320	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	220	0.2	2.0	0.10
	370	654.964	0.4	140	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
160	654.991	0.8	250	16.0	0.55	23.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
260	654.991	0.8	250	15.0	0.55	23.0	0.25	655.303A	0.8	350	0.2	2.5	0.14	
320	654.989	0.4	250	14.0	0.35	22.0	0.15	655.303A	0.8	250	0.2	2.5	0.14	
370	654.989	0.4	180	14.0	0.35	22.0	0.15	655.302A	0.4	160	0.2	2.0	0.10	
420	654.989	0.4	120	12.0	0.35	20.0	0.15	655.301A	0.2	120	0.2	1.5	0.06	
470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.301A	0.2	60	0.2	1.0	0.06	
520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.301A	0.2	40	0.2	1.0	0.06	


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.


For cutting speeds above 400 m/min we recommend to use the counter weight 318.105 and to balance it according to the table (see operating instructions).

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.

Picture 3

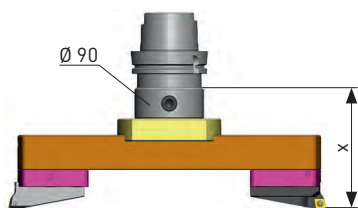

Picture 4



DVS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	mm/Ø	mm/U	mm/Ø	mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	160	654.991	0.8	230	16.0	0.55	23.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	260	654.991	0.8	230	15.0	0.55	23.0	0.25	655.390	0.8	350	0.2	2.5	0.14	
	320	654.989	0.4	230	14.0	0.35	22.0	0.15	655.380	0.4	250	0.2	2.5	0.10	
	370	654.989	0.4	180	14.0	0.35	22.0	0.15	655.380	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	12.0	0.35	20.0	0.15	655.370	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.370	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.370	0.2	40	0.2	1.0	0.06	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	160	654.965	0.8	210	11.0	0.55	18.0	0.25	655.320	0.8	320	0.2	2.0	0.14
		260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	320	0.2	2.0	0.14
		320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10
		370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10
		420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06
		470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06
		520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	160	654.992	0.8	900	16.0	0.55	23.0	0.25	655.398	0.8	1200	0.2	2.5	0.14	
	260	654.992	0.8	750	15.0	0.55	22.0	0.25	655.398	0.8	750	0.2	2.5	0.14	
	320	654.992	0.8	400	15.0	0.55	22.0	0.25	655.398	0.8	400	0.2	2.5	0.14	
	370	654.995	0.4	300	14.0	0.35	20.0	0.15	655.388	0.4	300	0.2	2.5	0.10	
	420	654.995	0.4	180	14.0	0.35	20.0	0.15	655.388	0.4	180	0.2	2.0	0.10	
	470	654.995	0.4	100	12.0	0.35	18.0	0.15	655.378	0.2	100	0.2	1.5	0.06	
	520	654.995	0.4	70	10.0	0.35	16.0	0.15	655.378	0.2	70	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	160	654.979	0.8	650	16.0	0.55	23.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		260	654.979	0.8	650	15.0	0.55	22.0	0.25	655.320	0.8	650	0.2	2.5	0.14
		320	654.978	0.4	400	15.0	0.35	22.0	0.15	655.318	0.4	400	0.2	2.5	0.10
		370	654.978	0.4	300	14.0	0.35	20.0	0.15	655.318	0.4	300	0.2	2.5	0.10
		420	654.978	0.4	180	14.0	0.35	20.0	0.15	655.319	0.2	180	0.2	2.0	0.06
		470	654.978	0.4	100	12.0	0.35	18.0	0.15	655.319	0.2	100	0.2	1.5	0.06
		520	654.978	0.4	70	10.0	0.35	16.0	0.15	655.319	0.2	70	0.2	1.5	0.06
S Titanium 3.7164	160	654.969	0.8	120	11.0	0.55	18.0	0.25	655.320	0.8	120	0.2	2.5	0.14	
	260	654.968	0.4	120	10.0	0.35	17.0	0.15	655.320	0.8	120	0.2	2.5	0.14	
	320	654.968	0.4	120	9.0	0.35	15.0	0.15	655.318	0.4	100	0.2	2.5	0.10	
	370	654.968	0.4	100	9.0	0.35	15.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	420	654.968	0.4	80	8.0	0.35	14.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
	470	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	1.0	0.06	
	520	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	160	654.969	0.8	50	9.0	0.40	14.0	0.2	655.326	0.4	50	0.2	1.5	0.10
		260	654.968	0.4	50	8.0	0.25	12.0	0.15	655.326	0.4	50	0.2	1.5	0.10
		320	654.968	0.4	40	8.0	0.25	12.0	0.15	655.326	0.4	40	0.2	1.5	0.10
		370	654.968	0.4	40	8.0	0.25	10.0	0.15	655.316	0.2	30	0.1	1.0	0.06
		420	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.8	0.06
		470	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.6	0.06


**DVS rough boring**

For double offset rough boring "DVS" a longer insert holder 637.951 / CC12 or 637.953 / CC16 has to be mounted on one side of the tool assembly. The longer insert holders are coloured black.


**Extension slides:** Ø 340 - 410 mm (picture 1+2), extension slides 318.224 / Ø 410 - 480 mm (picture 3+4), extension slide 318.225

**Extension of the boring range for fine boring with additional insert holders:** With insert holder size 2, 626.272 the boring range can be extended by 25 mm/Ø, and with insert holder size 3, 626.273 by 50 mm/Ø.

Picture 1

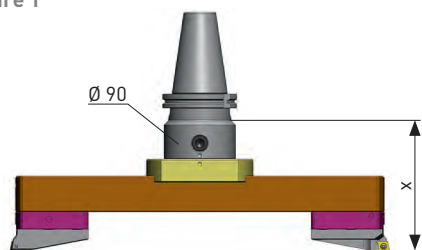

Picture 2

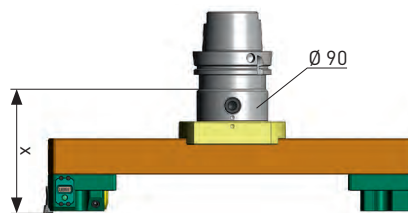

RSS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow. mm/Ø	fn mm/U	Allow. mm/Ø	Feed mm/U	Order No.	R	m/min	Std. val. mm/Ø	Max. mm/Ø	Ra 1.6 µm mm/U	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	160	654.993A	0.4	250	10.0	0.40	18.0	0.2	655.334	0.8	450	0.2	2.5	0.14	
	260	654.993A	0.4	250	10.0	0.40	18.0	0.2	655.334	0.8	400	0.2	2.5	0.14	
	320	654.993A	0.4	250	9.0	0.40	16.0	0.2	655.324	0.4	250	0.2	2.5	0.10	
	370	654.993A	0.4	180	9.0	0.40	16.0	0.2	655.324	0.4	180	0.2	2.0	0.10	
	420	654.993A	0.4	120	8.0	0.40	14.0	0.2	655.375	0.2	120	0.2	1.5	0.06	
	470	654.993A	0.4	60	8.0	0.40	14.0	0.2	655.375	0.2	60	0.2	1.0	0.06	
	520	654.993A	0.4	40	8.0	0.40	14.0	0.2	655.375	0.2	40	0.2	1.0	0.06	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	160	654.993A	0.4	230	10.0	0.35	18.0	0.15	655.334	0.8	450	0.2	2.5	0.14
		260	654.993A	0.4	230	10.0	0.35	18.0	0.15	655.334	0.8	400	0.2	2.5	0.14
		320	654.993A	0.4	230	9.0	0.35	16.0	0.15	655.324	0.4	250	0.2	2.5	0.10
		370	654.993A	0.4	180	9.0	0.35	16.0	0.15	655.324	0.4	180	0.2	2.0	0.10
		420	654.993A	0.4	120	8.0	0.35	14.0	0.15	655.375	0.2	120	0.2	1.5	0.06
		470	654.993A	0.4	60	8.0	0.35	14.0	0.15	655.375	0.2	60	0.2	1.0	0.06
		520	654.993A	0.4	40	8.0	0.35	14.0	0.15	655.375	0.2	40	0.2	1.0	0.06
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	160	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	350	0.2	2.0	0.14	
	260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14	
	320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10	
	370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10	
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	160	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	350	0.2	2.0	0.14
		260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14
		320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10
370		654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10	
420		654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
470		654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
520		654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	160	654.964	0.4	180	10.0	0.35	17.0	0.15	655.320	0.8	300	0.2	2.0	0.14	
	260	654.964	0.4	180	10.0	0.35	17.0	0.15	655.320	0.8	250	0.2	2.0	0.14	
	320	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	220	0.2	2.0	0.10	
	370	654.964	0.4	140	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10	
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
K Gray cast iron GG 15 GG 20 GG 25 GG 30	160	654.989	0.4	250	14.0	0.35	20.0	0.15	655.303A	0.8	350	0.2	2.5	0.14	
	260	654.989	0.4	250	14.0	0.35	20.0	0.15	655.303A	0.8	350	0.2	2.5	0.14	
	320	654.989	0.4	250	14.0	0.35	20.0	0.15	655.303A	0.8	250	0.2	2.5	0.14	
	370	654.989	0.4	180	12.0	0.35	18.0	0.15	655.302A	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	12.0	0.35	18.0	0.15	655.301A	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.301A	0.2	60	0.2	1.0	0.06	
520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.301A	0.2	40	0.2	1.0	0.06		


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.


For cutting speeds above 400 m/min we recommend to use the counter weight 318.105 and to balance it according to the table (see operating instructions).

The weight of long tools can be substantially reduced by using KKN lightweight components with equal cutting performance.

Picture 3

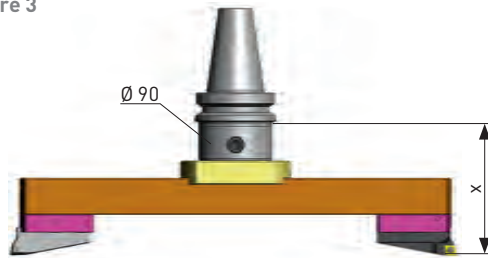

Picture 4

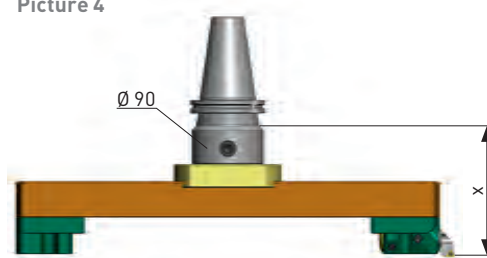

DVS

Workpiece material	Boring depth X [mm]	Rough boring Serie 318							Fine boring EWN/EWE 200						
		Inserts		Vc	RSS		DVS		Inserts		Vc	Allow.		Feed	
		Order No.	R	m/min	Allow.	fn	Allow.	Feed	Order No.	R	m/min	Std. val.	Max.	Ra 1.6 µm	
				mm/Ø	mm/U	mm/Ø	mm/U				mm/Ø	mm/Ø	mm/U		
K GGG < 500 N/mm2 GGG 40 GGG 50	160	654.989	0.4	230	14.0	0.35	20.0	0.15	655.390	0.8	350	0.2	2.5	0.14	
	260	654.989	0.4	230	14.0	0.35	20.0	0.15	655.390	0.8	350	0.2	2.5	0.14	
	320	654.989	0.4	230	14.0	0.35	20.0	0.15	655.380	0.4	250	0.2	2.5	0.10	
	370	654.989	0.4	180	12.0	0.35	18.0	0.15	655.380	0.4	160	0.2	2.0	0.10	
	420	654.989	0.4	120	12.0	0.35	18.0	0.15	655.370	0.2	120	0.2	1.5	0.06	
	470	654.989	0.4	60	12.0	0.35	18.0	0.15	655.370	0.2	60	0.2	1.0	0.06	
	520	654.989	0.4	40	12.0	0.35	18.0	0.15	655.370	0.2	40	0.2	1.0	0.06	
	GGG < 800 N/mm2 GGG 60 GGG 70 GGG 80	160	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	320	0.2	2.0	0.14
	260	654.964	0.4	210	10.0	0.35	17.0	0.15	655.320	0.8	320	0.2	2.0	0.14	
	320	654.964	0.4	210	9.0	0.35	15.0	0.15	655.318	0.4	240	0.2	2.0	0.10	
	370	654.964	0.4	180	9.0	0.35	15.0	0.15	655.318	0.4	160	0.2	1.5	0.10	
	420	654.964	0.4	120	8.0	0.35	14.0	0.15	655.319	0.2	120	0.2	1.0	0.06	
	470	654.964	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	0.8	0.06	
	520	654.964	0.4	40	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	0.8	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	160	654.995	0.4	900	14.0	0.35	20.0	0.15	655.398	0.8	1200	0.2	2.5	0.14	
	260	654.995	0.4	750	14.0	0.35	20.0	0.15	655.398	0.8	750	0.2	2.5	0.14	
	320	654.995	0.4	400	14.0	0.35	20.0	0.15	655.398	0.8	400	0.2	2.5	0.14	
	370	654.995	0.4	300	12.0	0.35	18.0	0.15	655.388	0.4	300	0.2	2.5	0.10	
	420	654.995	0.4	180	12.0	0.35	18.0	0.15	655.388	0.4	180	0.2	2.0	0.10	
	470	654.995	0.4	100	12.0	0.35	18.0	0.15	655.378	0.2	100	0.2	1.5	0.06	
	520	654.995	0.4	70	12.0	0.35	18.0	0.15	655.378	0.2	70	0.2	1.5	0.06	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	160	654.978	0.4	650	14.0	0.35	20.0	0.15	655.320	0.8	650	0.2	2.5	0.14
	260	654.978	0.4	650	14.0	0.35	20.0	0.15	655.320	0.8	650	0.2	2.5	0.14	
	320	654.978	0.4	400	14.0	0.35	20.0	0.15	655.318	0.4	400	0.2	2.5	0.10	
	370	654.978	0.4	300	12.0	0.35	18.0	0.15	655.318	0.4	300	0.2	2.5	0.10	
	420	654.978	0.4	180	12.0	0.35	18.0	0.15	655.319	0.2	180	0.2	2.0	0.06	
	470	654.978	0.4	100	12.0	0.35	18.0	0.15	655.319	0.2	100	0.2	1.5	0.06	
	520	654.978	0.4	70	12.0	0.35	18.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
S Titanium 3.7164	160	654.968	0.4	120	10.0	0.35	17.0	0.15	655.320	0.8	120	0.2	2.5	0.14	
	260	654.968	0.4	120	10.0	0.35	17.0	0.15	655.320	0.8	120	0.2	2.5	0.14	
	320	654.968	0.4	120	9.0	0.35	15.0	0.15	655.318	0.4	100	0.2	2.5	0.10	
	370	654.968	0.4	100	9.0	0.35	15.0	0.15	655.318	0.4	80	0.2	2.0	0.10	
	420	654.968	0.4	80	8.0	0.35	14.0	0.15	655.319	0.2	70	0.2	1.5	0.06	
	470	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	60	0.2	1.0	0.06	
	520	654.968	0.4	60	8.0	0.35	12.0	0.15	655.319	0.2	40	0.2	1.0	0.06	
	Ni-basic-, Co-basic-, Alloys	160	654.968	0.4	50	8.0	0.25	12.0	0.15	655.326	0.4	50	0.2	1.5	0.10
	260	654.968	0.4	50	8.0	0.25	12.0	0.15	655.326	0.4	50	0.2	1.5	0.10	
	320	654.968	0.4	40	8.0	0.25	12.0	0.15	655.326	0.4	40	0.2	1.5	0.10	
	370	654.968	0.4	40	8.0	0.25	10.0	0.15	655.316	0.2	30	0.1	1.0	0.06	
	420	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.8	0.06	
	470	654.968	0.4	30	6.0	0.25	8.0	0.15	655.316	0.2	30	0.1	0.6	0.06	

**DVS rough boring**

For double offset rough boring "DVS" a longer insert holder 637.951 / CC12 or 637.953 / CC16 has to be mounted on one side of the tool assembly. The longer insert holders are coloured black.

**Extension slides:** Ø 480 - 550 mm (picture 1+2), extension slides 318.226 / Ø 550 - 620 mm (picture 3+4), extension slides 318.227

**Extension of the boring range for fine boring with additional insert holders:** With insert holder size 2, 626.272 the boring range can be extended by 25 mm/Ø, and with insert holder size 3, 626.273 by 50 mm/Ø.







The fine boring heads EWN 04-7 and EWN 04-15 are mainly used in the watch and micro industry. Therefore these heads are available with the BIG KAISER-CK connection and with cylindrical shank. For chucking the boring heads with cylindrical shank we recommend BIG MEGA CHUCK collet holders or hydraulic chucks.

#### Fine boring heads EWN 04-7 (headline bright purple)

The highest permissible spindle speed for these boring heads is 30 000 rpm. When working with high spindle speeds ( $n > 15\,000$  rpm), the whole and pre-set tool assembly has to be balanced. We recommend the use of a fine balanced tool shank for all operations.

Boring cutters with uncoated or coated cutting edges are available. They have a 4 mm shank and are made with flats for the cutting edge orientation. For OD turning in the range of  $\varnothing 0.2 - 2.3$  mm there are pin turning cutters on offer. The boring depth and the pin length "X" are limited by the boring- and pin turning cutters.



#### Fine boring heads EWN 04-15 (headline dark purple)

These boring heads are certified for a max. spindle speed of 20 000 rpm. When working with high spindle speeds ( $n > 10\,000$  rpm) the whole and pre-set tool assembly has to be balanced. We recommend the use of a fine balanced tool shank for all operations.

For boring in the range between  $\varnothing 0.4 - 6.0$  mm there are carbide boring cutters with coated cutting edge available. The range from  $\varnothing 5.8 - 15.5$  mm is covered with carbide tool holders for inserts. The shank diameter for the boring cutters and the tool holders is 7 mm. For OD turning from  $\varnothing 0.2 - 6.0$ , there are two different carbide pin turning cutters on offer. The boring depth and the pin length "X" are limited by the boring- and pin turning cutters and the tool holders.

#### In the table the following terms and dimensions are used:

Workpiece material:	Only rough classification of metallic materials	
Boring depth X:	Given by the boring cutter or tool holder	(mm)
Carbide boring cutter/Insert:	For information about carbide boring cutters and inserts consult BIG KAISER main catalogue.	
R:	Nose radius of boring cutter/insert	(mm)
Vc:	Cutting speed	(m/min)
Stock allow.:	Stock allowance per cut in $\varnothing$	(mm)
fn:	Feed per revolution	(mm/U)

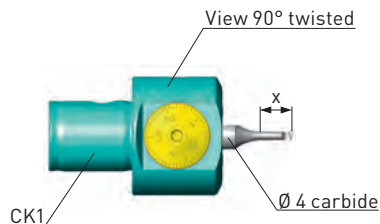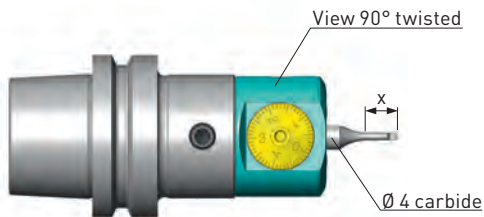

Workpiece material	Ø 0.4-0.6 / 0.9 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	1.1	615.561	0.10	35	0.1	0.04
	1.5	615.541	0.05			0.02
M Stainless steels	1.1	615.561	0.10	35	0.1	0.04
	1.5	615.541	0.05			0.02
K Cast iron	1.1	615.561	0.10	35	0.1	0.04
	1.5	615.541	0.05			0.02
N Aluminium	1.1	615.551	0.10	35	0.1	0.04
	1.5	615.541	0.05			0.02
Non-ferrous metals	1.1	615.561	0.10	35	0.1	0.04
	1.5	615.541	0.05			0.02
S Titanium	1.1	615.561	0.10	30	0.1	0.04
	1.5	615.541	0.05			0.02

Workpiece material	Ø 0.6-0.8 / 0.9 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	1.5	615.562	0.10	55	0.1	0.04
	1.5	615.541	0.05			0.02
M Stainless steels	1.5	615.562	0.10	55	0.1	0.04
	1.5	615.541	0.05			0.02
K Cast iron	1.5	615.562	0.10	55	0.1	0.04
	1.5	615.541	0.05			0.02
N Aluminium	1.5	615.552	0.10	55	0.1	0.04
	1.5	615.541	0.05			0.02
Non-ferrous metals	1.5	615.562	0.10	55	0.1	0.04
	1.5	615.541	0.05			0.02
S Titanium	1.5	615.562	0.10	50	0.1	0.04
	1.5	615.541	0.05			0.02

Workpiece material	Ø 0.8-1.2 / 0.9-1.4 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	2.0	615.563	0.10	75	0.1	0.04
	3.0	615.542	0.05			0.02
M Stainless steels	2.0	615.563	0.10	75	0.1	0.04
	3.0	615.542	0.05			0.02
K Cast iron	2.0	615.563	0.10	75	0.1	0.04
	3.0	615.542	0.05			0.02
N Aluminium	2.0	615.553	0.10	75	0.1	0.04
	3.0	615.542	0.05			0.02
Non-ferrous metals	2.0	615.563	0.10	75	0.1	0.04
	3.0	615.542	0.05			0.02
S Titanium	2.0	615.563	0.10	50	0.1	0.04
	3.0	615.542	0.05			0.02

Workpiece material	Ø 1.2-1.5 / 0.9-1.4 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	2.5	615.564	0.10	85	0.1	0.04
	3.0	615.542	0.05			0.02
M Stainless steels	2.5	615.564	0.10	85	0.1	0.04
	3.0	615.542	0.05			0.02
K Cast iron	2.5	615.564	0.10	85	0.1	0.04
	3.0	615.542	0.05			0.02
N Aluminium	2.5	615.554	0.10	85	0.1	0.04
	3.0	615.542	0.05			0.02
Non-ferrous metals	2.5	615.564	0.10	85	0.1	0.04
	3.0	615.542	0.05			0.02
S Titanium	2.5	615.564	0.10	50	0.1	0.04
	3.0	615.542	0.05			0.02


Workpiece material	Ø 1.5-1.9 / 1.4-2.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	3.5	615.565	0.20	140	0.1	0.06
	5.0	615.543	0.05			0.02
M Stainless steels	3.5	615.565	0.20	125	0.1	0.06
	5.0	615.543	0.05			0.02
K Cast iron	3.5	615.565	0.20	140	0.1	0.06
	5.0	615.543	0.05			0.02
N Aluminium	3.5	615.555	0.20	140	0.1	0.06
	5.0	615.543	0.05			0.02
Non-ferrous metals	3.5	615.565	0.20	140	0.1	0.06
	5.0	615.543	0.05			0.02
S Titanium	3.5	615.565	0.20	50	0.1	0.06
	5.0	615.543	0.05			0.02

Workpiece material	Ø 1.9-3.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	4.5	615.566	0.20	175	0.1	0.06
	6.0	615.544	0.05			0.02
M Stainless steels	4.5	615.566	0.20	125	0.1	0.06
	6.0	615.544	0.05			0.02
K Cast iron	4.5	615.566	0.20	175	0.1	0.06
	6.0	615.544	0.05			0.02
N Aluminium	4.5	615.566	0.20	175	0.1	0.06
	6.0	615.544	0.05			0.02
Non-ferrous metals	4.5	615.566	0.20	175	0.1	0.06
	6.0	615.544	0.05			0.02
S Titanium	4.5	615.566	0.20	50	0.1	0.06
	6.0	615.544	0.05			0.02

**Remark:**

\* Vc max. corresponds either to the max. permissible spindle speed for this fine boring head (30 000 rpm), or to the max. cutting speed for the machining of the corresponding workpiece material.



For cutting with high spindle speeds (> 15 000 rpm), the complete and pre-set tool assembly has to be fine balanced. For all operations we recommend to use a fine balanced tool shank.

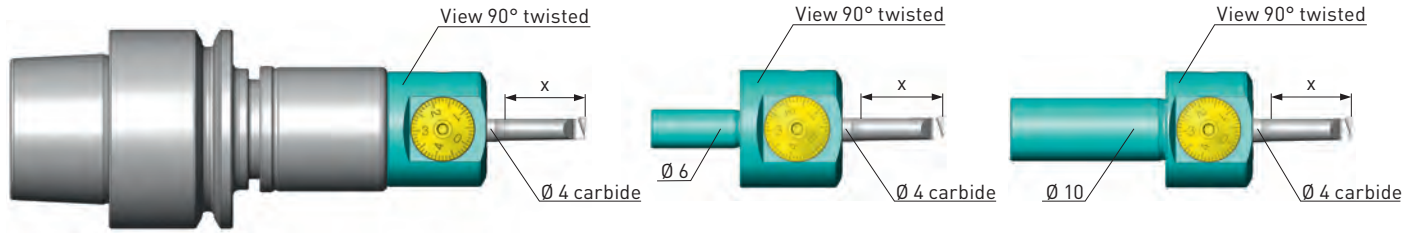

Workpiece material	Ø 2.9-4.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	10	615.545	0.05	250	0.1	0.02
M Stainless steels	10	615.545	0.05	150	0.1	0.02
K Cast iron	10	615.545	0.05	250	0.1	0.02
N Aluminium Non-ferrous metals	10	615.545	0.05	270	0.1	0.02
	10	615.545	0.05	250	0.1	0.02
S Titanium	10	615.545	0.05	50	0.1	0.02

Workpiece material	Ø 3.9-5.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	13	615.546	0.05	250	0.1	0.02
M Stainless steels	13	615.546	0.05	150	0.1	0.02
K Cast iron	13	615.546	0.05	250	0.1	0.02
N Aluminium Non-ferrous metals	13	615.546	0.05	350	0.1	0.02
	13	615.546	0.05	250	0.1	0.02
S Titanium	13	615.546	0.05	50	0.1	0.02

Workpiece material	Ø 4.9-7.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	16	615.547	0.05	250	0.1	0.02
M Stainless steels	16	615.547	0.05	150	0.1	0.02
K Cast iron	16	615.547	0.05	250	0.1	0.02
N Aluminium Non-ferrous metals	16	615.547	0.05	350	0.1	0.02
	16	615.547	0.05	250	0.1	0.02
S Titanium	16	615.547	0.05	50	0.1	0.02

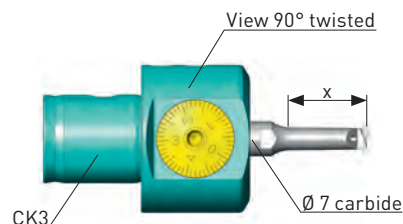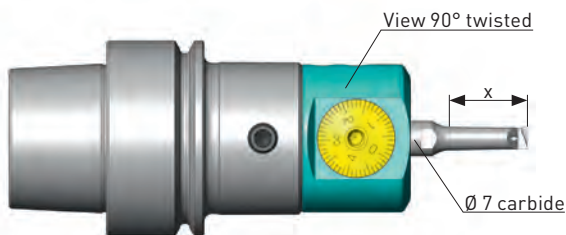

Workpiece material	Ø 0.4-1.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	1.5	615.522	0.05	25	0.1	0.02
M Stainless steels	1.5	615.522	0.05	25	0.1	0.02
K Cast iron	1.5	615.522	0.05	25	0.1	0.02
N Aluminium	1.5	615.522	0.05	25	0.1	0.02
Non-ferrous metals	1.5	615.522	0.05	25	0.1	0.02
S Titanium	1.5	615.522	0.05	25	0.1	0.02

Workpiece material	Ø 0.9-1.5 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
	3	615.524	0.05	55	0.1	0.02
	3	615.524	0.05	55	0.1	0.02
	3	615.524	0.05	55	0.1	0.02
	3	615.524	0.05	55	0.1	0.02
	3	615.524	0.05	55	0.1	0.02
	3	615.524	0.05	50	0.1	0.02

Workpiece material	Ø 1.4-2.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	5	615.525	0.05	85	0.1	0.02
M Stainless steels	5	615.525	0.05	85	0.1	0.02
K Cast iron	5	615.525	0.05	85	0.1	0.02
N Aluminium	5	615.525	0.05	85	0.1	0.02
Non-ferrous metals	5	615.525	0.05	85	0.1	0.02
S Titanium	5	615.525	0.05	50	0.1	0.02

Workpiece material	Ø 1.9-3.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
	6	615.501	0.05	110	0.1	0.02
	6	615.501	0.05	110	0.1	0.02
	6	615.501	0.05	110	0.1	0.02
	6	615.501	0.05	110	0.1	0.02
	6	615.501	0.05	110	0.1	0.02
	6	615.501	0.05	50	0.1	0.02

Workpiece material	Ø 2.9-4.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	10	615.502	0.05	180	0.1	0.02
M Stainless steels	10	615.502	0.05	150	0.1	0.02
K Cast iron	10	615.502	0.05	180	0.1	0.02
N Aluminium	10	615.502	0.05	180	0.1	0.02
Non-ferrous metals	10	615.502	0.05	180	0.1	0.02
S Titanium	10	615.502	0.05	50	0.1	0.02



Workpiece material	Ø 3.9-5.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
	13	615.503	0.05	240	0.1	0.02
	13	615.503	0.05	150	0.1	0.02
	13	615.503	0.05	240	0.1	0.02
	13	615.503	0.05	240	0.1	0.02
	13	615.503	0.05	240	0.1	0.02
	13	615.503	0.05	50	0.1	0.02

Workpiece material	Ø 4.9-6.0mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	16	615.504	0.05	250	0.1	0.02
M Stainless steels	16	615.504	0.05	150	0.1	0.02
K Cast iron	16	615.504	0.05	250	0.1	0.02
N Aluminium	16	615.504	0.05	300	0.1	0.02
Non-ferrous metals	16	615.504	0.05	300	0.1	0.02
S Titanium	16	615.504	0.05	50	0.1	0.02

**Remark:**

\* Vc max. corresponds either to the max. permissible spindle speed for this fine boring head (20 000 rpm), or to the max. cutting speed for the machining of the corresponding workpiece material.

For cutting with high spindle speeds (> 10 000 rpm), the complete and pre-set tool assembly has to be fine balanced. For all operations we recommend to use a fine balanced tool shank.

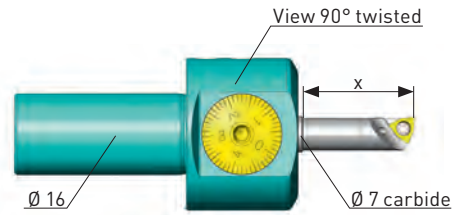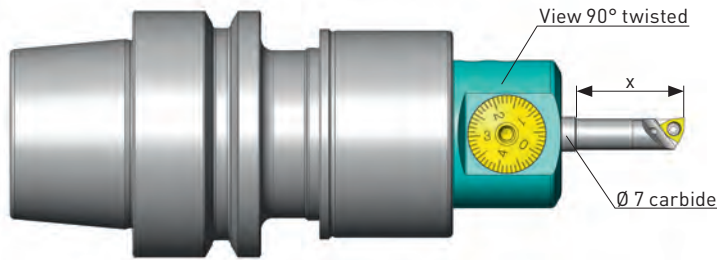

Workpiece material	Ø 5.8-7.0 mm Tool holder 615.505					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	20	655.606	0.1	250	0.1	0.04
M Stainless steels	20	655.606	0.1	150	0.1	0.04
K Cast iron	20	655.605	0.1	250	0.1	0.04
N Aluminium	20	655.604	0.1	360	0.1	0.04
Non-ferrous metals	20	655.604	0.1	300	0.1	0.04
S Titanium	20	655.606	0.1	60	0.1	0.04

Workpiece material	Ø 6.8-8.0 mm Tool holder 615.506					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	20	655.606	0.1	250	0.1	0.04
M Stainless steels	20	655.606	0.1	150	0.1	0.04
K Cast iron	20	655.605	0.1	250	0.1	0.04
N Aluminium	20	655.604	0.1	360	0.1	0.04
Non-ferrous metals	20	655.604	0.1	300	0.1	0.04
S Titanium	20	655.606	0.1	60	0.1	0.04


Workpiece material	Ø 7.8-9.0 mm Tool holder 615.507					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	30	651.837	0.2	250	0.1	0.06
M Stainless steels	30	651.837	0.2	150	0.1	0.06
K Cast iron	30	651.837	0.2	250	0.1	0.06
N Aluminium	30	651.825	0.2	360	0.1	0.06
Non-ferrous metals	30	651.825	0.2	300	0.1	0.06
S Titanium	30	651.837	0.2	70	0.1	0.06

Workpiece material	Ø 8.8-10.0 mm Tool holder 615.508					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	30	651.837	0.2	250	0.1	0.06
M Stainless steels	30	651.837	0.2	150	0.1	0.06
K Cast iron	30	651.837	0.2	250	0.1	0.06
N Aluminium	30	651.825	0.2	360	0.1	0.06
Non-ferrous metals	30	651.825	0.2	300	0.1	0.06
S Titanium	30	651.837	0.2	70	0.1	0.06

Workpiece material	Ø 9.8-12.0 mm Tool holder 615.509					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	30	651.837	0.2	250	0.1	0.06
M Stainless steels	30	651.837	0.2	150	0.1	0.06
K Cast iron	30	651.837	0.2	250	0.1	0.06
N Aluminium	30	651.825	0.2	360	0.1	0.06
Non-ferrous metals	30	651.825	0.2	300	0.1	0.06
S Titanium	30	651.837	0.2	70	0.1	0.06

Workpiece material	Ø 11.8-15.5 mm Tool holder 615.511					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	30	651.837	0.2	250	0.1	0.06
M Stainless steels	30	651.837	0.2	150	0.1	0.06
K Cast iron	30	651.837	0.2	250	0.1	0.06
N Aluminium	30	651.825	0.2	360	0.1	0.06
Non-ferrous metals	30	651.825	0.2	300	0.1	0.06
S Titanium	30	651.837	0.2	70	0.1	0.06



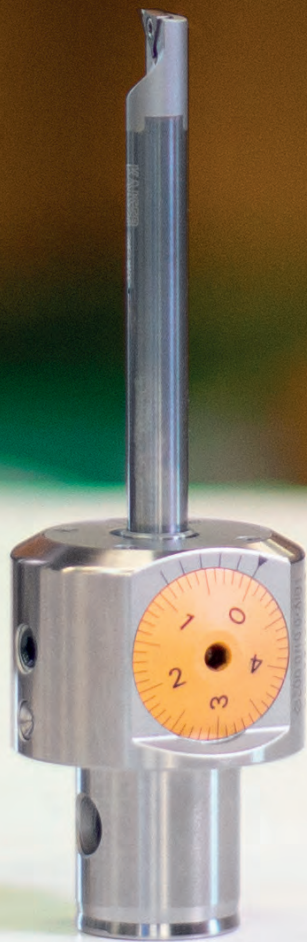





The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 start from Ø 2.0 mm and are the same for all the heads up to the diameter range Ø 8.8 - 10.0 (12.8) mm. On these pages, there is a two colour headline bright and dark yellow. As from diameter 9.8 mm, there are different cutting data for the heads EWN 04-22 and EWN/EWE 2-32. The headlines for EWN 04-22 are coloured bright yellow, the ones for EWN/EWE 2-32 dark yellow.


The cutting data are applicable when tool holders and boring cutters made of carbide are used (exception EWN 04-22, diameter range 13.8 - 21.8 mm). The different diameter ranges are in line with the existing accessories. On a double page, there is the cutting data for one specific diameter range. The columns "universal" and "optimized" differ in terms of cutting data and inserts.

The cutting data in the column „optimized“ are applicable when the best possible accessories for each diameter range are used. This includes the use of adjustable tool holders for the EWN/EWE 2-32 for diameter 9.8 mm and bigger. The optimized accessories are clamped in the center, or close to the central position. Therefore, the imbalance is minimized, which permits higher cutting speeds. The listed inserts reflect the best possible choices under consideration of workpiece material and boring depth.

In the column „universal“, the cutting data are lower and the choice of inserts is reduced. The lower data permits a bigger applicable boring range (starting diameter + 4 mm). The use of this data is recommended for single piece production.

**Important:** The cutting data must in any case be adapted to the working conditions

#### Application advices for adjustable tool holders

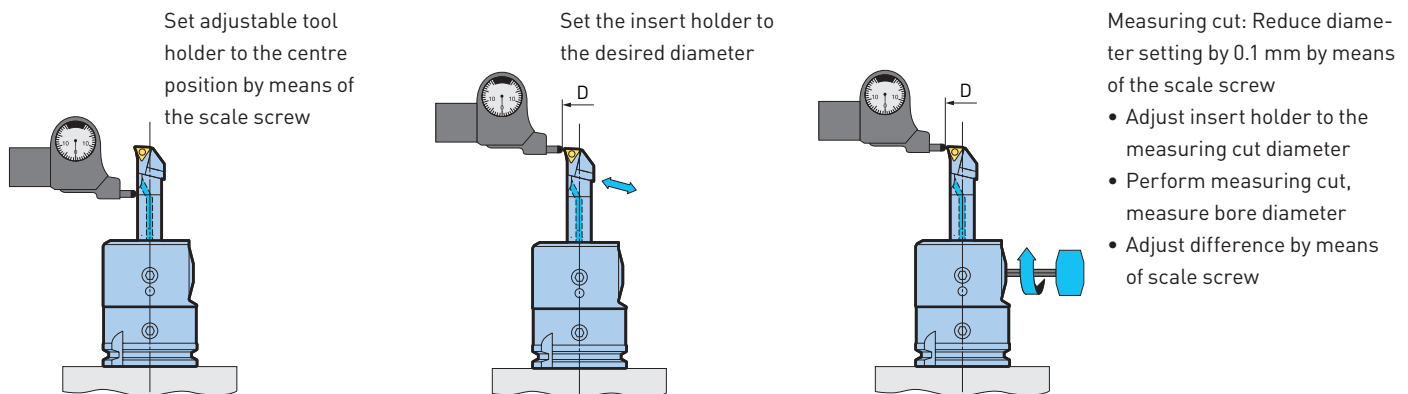


#### In the table the following terms and dimensions are used:


Workpiece material:	Material no. according to DIN or generally used designation	
Boring depth X:	Projection of the tool holder	(mm)
Insert:	Detailed information about the inserts is shown in the BIG KAISER main catalogue.	
R:	Nose radius of boring cutter/insert	(mm)
Vc:	Cutting speed	(m/min)
Stock allow.:	Stock allowance per cut in Ø	(mm)
fn:	Feed per revolution	(mm/U)
Ra:	Surface quality (Ra 1.6 µm for N7)	

#### Balanceable fine boring head EWB 2-32

There are special cutting data and adjustment tables for the balanceable fine boring head EWB 2-32. They are delivered with the tool.

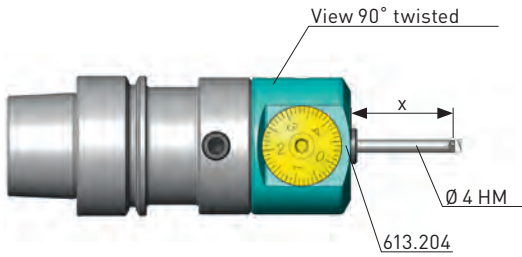

EWN 04-22

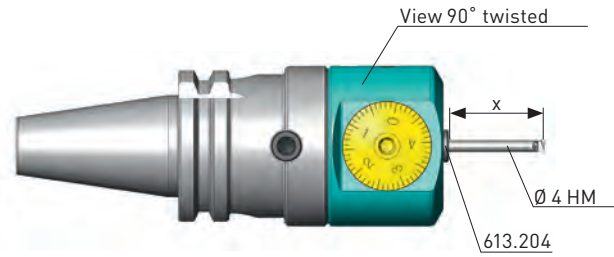

EWN 2-32

Workpiece material	Ø 2.0-3.0 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	9	611.155	0.2	60	0.1	0.008
M Stainless steels	9	611.155	0.2	60	0.1	0.008
K Cast iron	9	611.155	0.2	60	0.1	0.008
N Aluminium	9	611.155	0.2	60	0.1	0.008
Non-ferrous metals	9	611.155	0.2	60	0.1	0.008
S Titanium	9	611.155	0.2	40	0.1	0.008


Workpiece material	Ø 3.0-3.9 mm					
	Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
	X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P Steel	14	611.156	0.2	90	0.1	0.008
M Stainless steels	14	611.156	0.2	90	0.1	0.008
K Cast iron	14	611.156	0.2	90	0.1	0.008
N Aluminium	14	611.156	0.2	90	0.1	0.008
Non-ferrous metals	14	611.156	0.2	90	0.1	0.008
S Titanium	14	611.156	0.2	50	0.1	0.008

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used. For the EWN 04-22 only short reducers are available.



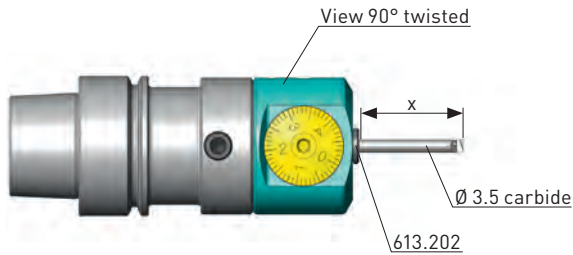

EWN 04-22

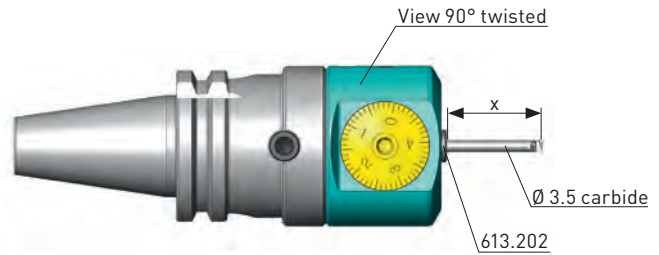

EWN 2-32


Workpiece material	Boring depth X [mm]	universal Ø 3.9 - 7.9 mm							optimized Ø 3.9 - 4.9 mm							
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm2 1.0037 1.0401 1.0715  Steel 450-850 N/mm2 1.0050 1.0503 1.1141 1.1191 1.5752  Steel 850-1200 N/mm2 1.2083 1.2294 1.2312 1.2344 1.2764	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08	
	15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08	
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06	
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06	
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06	
	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08	
	15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08	
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06	
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06	
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06	
	10	615.203A	0.1	80	0.1	0.3	0.04	0.08	615.203A	0.1	90	0.1	0.3	0.04	0.08	
	15	615.203A	0.1	65	0.1	0.3	0.04	0.08	615.203A	0.1	70	0.1	0.3	0.04	0.08	
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06	
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06	
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762  Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	615.203A	0.1	80	0.1	0.3	0.04	0.08	615.203A	0.1	90	0.1	0.3	0.04	0.08	
	15	615.203A	0.1	65	0.1	0.3	0.04	0.08	615.203A	0.1	70	0.1	0.3	0.04	0.08	
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06	
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06	
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06	
	10	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08	
	15	615.203A	0.1	60	0.1	0.3	0.04	0.08	615.203A	0.1	65	0.1	0.3	0.04	0.08	
	20	615.203A	0.1	45	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06	
	25	615.203A	0.1	30	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06	
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06	
	K Gray cast iron GG 15 GG 20 GG 25 GG 30	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08
		15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08
		20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06
		25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06
		30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used. For the EWN 04-22 only short reducers are available.



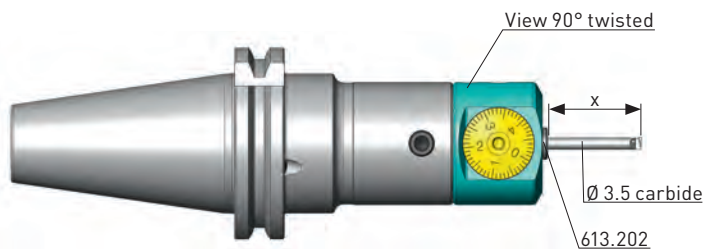

EWN 04-22

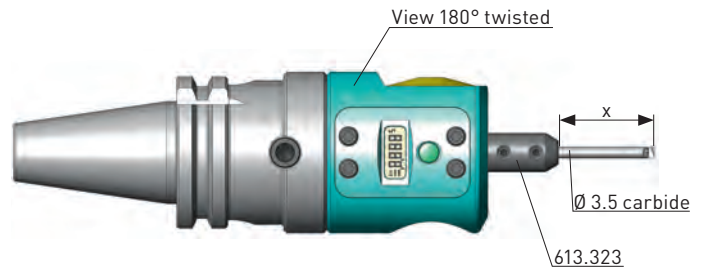


EWE 2-32


Workpiece material	Boring depth X [mm]	universal Ø 3.9 - 7.9 mm							optimized Ø 3.9 - 4.9 mm						
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	615.203A	0.1	90	0.10	0.3	0.04	0.08	615.203A	0.1	100	0.10	0.3	0.04	0.08
	15	615.203A	0.1	70	0.10	0.3	0.04	0.08	615.203A	0.1	80	0.10	0.3	0.04	0.08
	20	615.203A	0.1	50	0.10	0.2	0.04	0.06	615.203A	0.1	55	0.10	0.2	0.04	0.06
	25	615.203A	0.1	35	0.10	0.2	0.04	0.06	615.203A	0.1	40	0.10	0.2	0.04	0.06
	30	615.203A	0.1	25	0.10	0.2	0.04	0.06	615.203A	0.1	30	0.10	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	615.203	0.1	100	0.10	0.3	0.04	0.08	615.203	0.1	120	0.10	0.3	0.04	0.08
	15	615.203	0.1	85	0.10	0.3	0.04	0.08	615.203	0.1	100	0.10	0.3	0.04	0.08
	20	615.203	0.1	60	0.10	0.2	0.04	0.06	615.203	0.1	75	0.10	0.2	0.04	0.06
	25	615.203	0.1	40	0.10	0.2	0.04	0.06	615.203	0.1	55	0.10	0.2	0.04	0.06
	30	615.203	0.1	30	0.10	0.2	0.04	0.06	615.203	0.1	35	0.10	0.2	0.04	0.06
	35	615.203	0.1	20	0.10	0.2	0.04	0.06	615.203	0.1	25	0.10	0.2	0.04	0.06
S Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	10	615.203A	0.1	100	0.10	0.3	0.04	0.08	615.203A	0.1	120	0.10	0.3	0.04	0.08
	15	615.203A	0.1	85	0.10	0.3	0.04	0.08	615.203A	0.1	100	0.10	0.3	0.04	0.08
	20	615.203A	0.1	60	0.10	0.2	0.04	0.06	615.203A	0.1	75	0.10	0.2	0.04	0.06
	25	615.203A	0.1	40	0.10	0.2	0.04	0.06	615.203A	0.1	55	0.10	0.2	0.04	0.06
	30	615.203A	0.1	30	0.10	0.2	0.04	0.06	615.203A	0.1	35	0.10	0.2	0.04	0.06
	35	615.203A	0.1	20	0.10	0.2	0.04	0.06	615.203A	0.1	25	0.10	0.2	0.04	0.06
Titanium 3.7164	10	615.203A	0.1	90	0.10	0.3	0.04	0.08	615.203A	0.1	90	0.10	0.3	0.04	0.08
	15	615.203A	0.1	70	0.10	0.3	0.04	0.08	615.203A	0.1	70	0.10	0.3	0.04	0.08
	20	615.203A	0.1	50	0.10	0.2	0.04	0.06	615.203A	0.1	50	0.10	0.2	0.04	0.06
	25	615.203A	0.1	35	0.10	0.2	0.04	0.06	615.203A	0.1	35	0.10	0.2	0.04	0.06
Ni-basic-, Co-basic-, Alloys	10	615.203A	0.1	40	0.05	0.1	0.04	0.06	615.203A	0.1	40	0.05	0.1	0.04	0.06
	15	615.203A	0.1	30	0.05	0.1	0.04	0.06	615.203A	0.1	30	0.05	0.1	0.04	0.06
	20	615.203A	0.1	30	0.05	0.1	0.04	0.06	615.203A	0.1	30	0.05	0.1	0.04	0.06

**When applying the optimized cutting data:**

- the boring diameter of 4.9 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

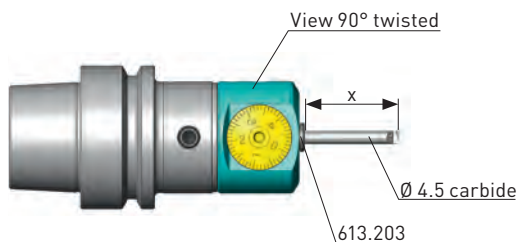

EWN 04-22

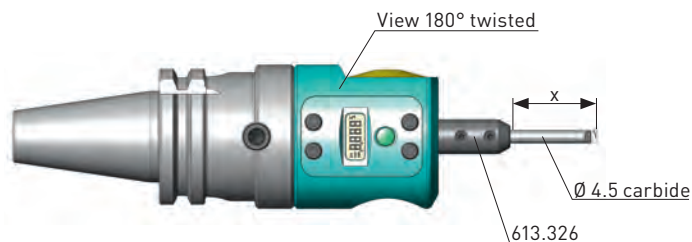


EWE 2-32

Workpiece material	Boring depth X [mm]	universal Ø 4.9 - 8.9 mm								optimized Ø 4.9 - 5.9 mm							
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	10	615.204A	0.1	100	0.1	0.3	0.04	0.08	615.204A	0.1	120	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	80	0.1	0.3	0.04	0.08	615.204A	0.1	100	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	60	0.1	0.3	0.04	0.08	615.204A	0.1	80	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		
	35	615.204A	0.1	25	0.1	0.2	0.04	0.06	615.204A	0.1	30	0.1	0.2	0.04	0.06		
P Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	10	615.204A	0.1	100	0.1	0.3	0.04	0.08	615.204A	0.1	120	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	80	0.1	0.3	0.04	0.08	615.204A	0.1	100	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	60	0.1	0.3	0.04	0.08	615.204A	0.1	80	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		
	35	615.204A	0.1	25	0.1	0.2	0.04	0.06	615.204A	0.1	30	0.1	0.2	0.04	0.06		
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	615.204A	0.1	90	0.1	0.3	0.04	0.08	615.204A	0.1	110	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	75	0.1	0.3	0.04	0.08	615.204A	0.1	90	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	55	0.1	0.3	0.04	0.08	615.204A	0.1	75	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		
	35	615.204A	0.1	25	0.1	0.2	0.04	0.06	615.204A	0.1	30	0.1	0.2	0.04	0.06		
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	10	615.204A	0.1	90	0.1	0.3	0.04	0.08	615.204A	0.1	110	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	75	0.1	0.3	0.04	0.08	615.204A	0.1	90	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	55	0.1	0.3	0.04	0.08	615.204A	0.1	75	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		
	35	615.204A	0.1	25	0.1	0.2	0.04	0.06	615.204A	0.1	30	0.1	0.2	0.04	0.06		
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	615.204A	0.1	80	0.1	0.3	0.04	0.08	615.204A	0.1	100	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	70	0.1	0.3	0.04	0.08	615.204A	0.1	80	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	55	0.1	0.3	0.04	0.08	615.204A	0.1	65	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		
	35	615.204A	0.1	25	0.1	0.2	0.04	0.06	615.204A	0.1	30	0.1	0.2	0.04	0.06		
Gray cast iron GG 15 GG 20 GG 25 GG 30	10	615.204A	0.1	100	0.1	0.3	0.04	0.08	615.204A	0.1	120	0.1	0.3	0.04	0.08		
	15	615.204A	0.1	80	0.1	0.3	0.04	0.08	615.204A	0.1	100	0.1	0.3	0.04	0.08		
	20	615.204A	0.1	60	0.1	0.3	0.04	0.08	615.204A	0.1	80	0.1	0.3	0.04	0.08		
	25	615.204A	0.1	45	0.1	0.2	0.04	0.06	615.204A	0.1	55	0.1	0.2	0.04	0.06		
	30	615.204A	0.1	35	0.1	0.2	0.04	0.06	615.204A	0.1	40	0.1	0.2	0.04	0.06		


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used. For the EWN 04-22 only short reducers are available.

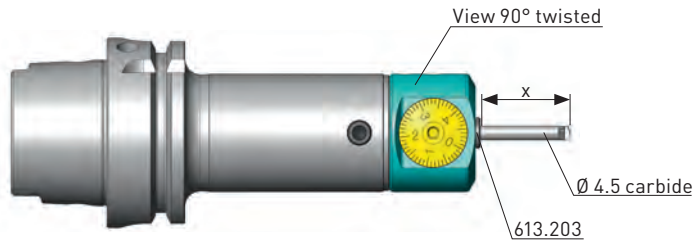

EWN 04-22

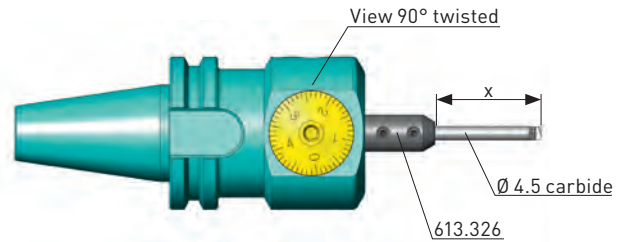


EWN 2-32


Workpiece material	Boring depth X [mm]	universal Ø 4.9 - 8.9 mm							optimized Ø 4.9 - 5.9 mm						
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	615.204A	0.1	100	0.10	0.3	0.04	0.08	615.204A	0.1	120	0.10	0.3	0.04	0.08
	15	615.204A	0.1	80	0.10	0.3	0.04	0.08	615.204A	0.1	100	0.10	0.3	0.04	0.08
	20	615.204A	0.1	60	0.10	0.3	0.04	0.08	615.204A	0.1	80	0.10	0.3	0.04	0.08
	25	615.204A	0.1	45	0.10	0.2	0.04	0.06	615.204A	0.1	55	0.10	0.2	0.04	0.06
	30	615.204A	0.1	35	0.10	0.2	0.04	0.06	615.204A	0.1	40	0.10	0.2	0.04	0.06
	35	615.204A	0.1	25	0.10	0.2	0.04	0.06	615.204A	0.1	30	0.10	0.2	0.04	0.06
	10	615.204A	0.1	90	0.10	0.3	0.04	0.08	615.204A	0.1	110	0.10	0.3	0.04	0.08
	15	615.204A	0.1	75	0.10	0.3	0.04	0.08	615.204A	0.1	90	0.10	0.3	0.04	0.08
	20	615.204A	0.1	55	0.10	0.3	0.04	0.08	615.204A	0.1	75	0.10	0.3	0.04	0.08
	25	615.204A	0.1	45	0.10	0.2	0.04	0.06	615.204A	0.1	55	0.10	0.2	0.04	0.06
	30	615.204A	0.1	35	0.10	0.2	0.04	0.06	615.204A	0.1	40	0.10	0.2	0.04	0.06
	35	615.204A	0.1	25	0.10	0.2	0.04	0.06	615.204A	0.1	30	0.10	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	615.204	0.1	100	0.10	0.3	0.04	0.08	615.204	0.1	150	0.10	0.3	0.04	0.08
	15	615.204	0.1	100	0.10	0.3	0.04	0.08	615.204	0.1	140	0.10	0.3	0.04	0.08
	20	615.204	0.1	80	0.10	0.3	0.04	0.08	615.204	0.1	120	0.10	0.3	0.04	0.08
	25	615.204	0.1	65	0.10	0.2	0.04	0.06	615.204	0.1	90	0.10	0.2	0.04	0.06
	30	615.204	0.1	50	0.10	0.2	0.04	0.06	615.204	0.1	60	0.10	0.2	0.04	0.06
	35	615.204	0.1	30	0.10	0.2	0.04	0.06	615.204	0.1	40	0.10	0.2	0.04	0.06
	40	615.204	0.1	20	0.10	0.2	0.04	0.06	615.204	0.1	25	0.10	0.2	0.04	0.06
	10	615.204A	0.1	100	0.10	0.3	0.04	0.08	615.204A	0.1	150	0.10	0.3	0.04	0.08
	15	615.204A	0.1	100	0.10	0.3	0.04	0.08	615.204A	0.1	140	0.10	0.3	0.04	0.08
	20	615.204A	0.1	80	0.10	0.2	0.04	0.06	615.204A	0.1	120	0.10	0.3	0.04	0.08
	25	615.204A	0.1	65	0.10	0.2	0.04	0.06	615.204A	0.1	90	0.10	0.2	0.04	0.06
	30	615.204A	0.1	50	0.10	0.2	0.04	0.06	615.204A	0.1	60	0.10	0.2	0.04	0.06
35	615.204A	0.1	30	0.10	0.2	0.04	0.06	615.204A	0.1	40	0.10	0.2	0.04	0.06	
40	615.204A	0.1	20	0.10	0.2	0.04	0.06	615.204A	0.1	25	0.10	0.2	0.04	0.06	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	10	615.204A	0.1	90	0.10	0.3	0.04	0.08	615.204A	0.1	100	0.10	0.3	0.04	0.08
	15	615.204A	0.1	80	0.10	0.3	0.04	0.08	615.204A	0.1	90	0.10	0.3	0.04	0.08
	20	615.204A	0.1	60	0.10	0.2	0.04	0.06	615.204A	0.1	60	0.10	0.2	0.04	0.06
	25	615.204A	0.1	45	0.10	0.2	0.04	0.06	615.204A	0.1	45	0.10	0.2	0.04	0.06
	30	615.204A	0.1	35	0.10	0.2	0.04	0.06	615.204A	0.1	35	0.10	0.2	0.04	0.06
	35	615.204A	0.1	25	0.10	0.2	0.04	0.06	615.204A	0.1	25	0.10	0.2	0.04	0.06
	10	615.204A	0.1	40	0.05	0.1	0.04	0.06	615.204A	0.1	40	0.05	0.1	0.04	0.06
	15	615.204A	0.1	30	0.05	0.1	0.04	0.06	615.204A	0.1	30	0.05	0.1	0.04	0.06
	20	615.204A	0.1	30	0.05	0.1	0.04	0.06	615.204A	0.1	30	0.05	0.1	0.04	0.06
	25	615.204A	0.1	30	0.05	0.1	0.04	0.06	615.204A	0.1	30	0.05	0.1	0.04	0.06

**When applying the optimized cutting data:**

- the boring diameter of 5.9 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

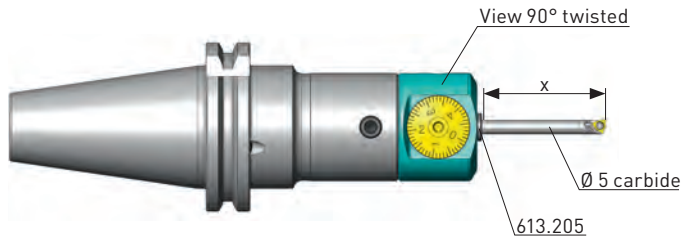

EWN 04-22

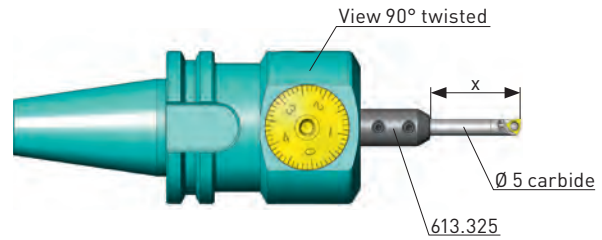


EWN 2-32

Workpiece material	Boring depth X [mm]	universal Ø 5.8 - 9.8 mm								optimized Ø 5.8 - 7.3 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10	
	20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10	
	30	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	90	0.1	0.3	0.06	0.07	
	40	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07	
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10
		20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10
		30	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	90	0.1	0.3	0.06	0.07
		40	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07
		50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07
		60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08
		30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06
		40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06
		50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06
		60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08	
	20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
	30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
	40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06	
	50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
	60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	110	0.1	0.3	0.06	0.08
		20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	90	0.1	0.3	0.06	0.08
		30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	70	0.1	0.3	0.06	0.06
		40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06
		50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06
		60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06
Gray cast iron GG 15 GG 20 GG 25 GG 30	10	655.603	0.2	100	0.1	0.4	0.06	0.10	655.603	0.2	150	0.1	0.4	0.06	0.10	
	20	655.603	0.2	80	0.1	0.4	0.06	0.10	655.603	0.2	120	0.1	0.4	0.06	0.10	
	30	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	90	0.1	0.4	0.06	0.07	
	40	655.605	0.1	60	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	50	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
60	655.605	0.1	25	0.1	0.2	0.04	0.07	655.605	0.1	30	0.1	0.2	0.04	0.07		


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used. For the EWN 04-22 only short reducers are available.

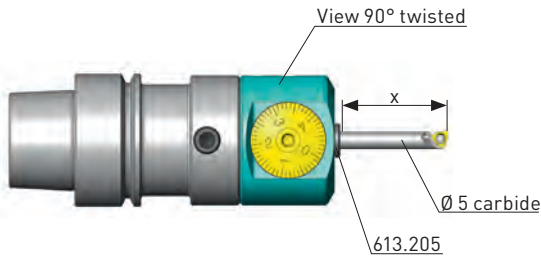

EWN 04-22

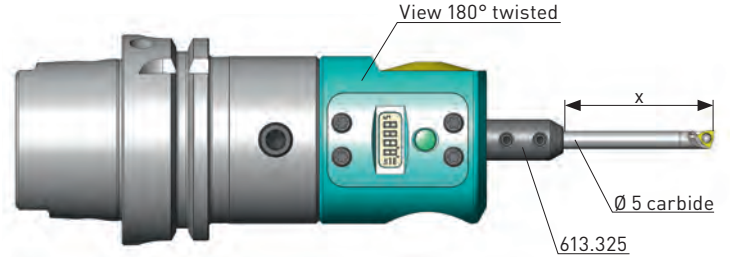



EWE 2-32

Workpiece material	Boring depth X [mm]	universal Ø 5.8 - 9.8 mm							optimized Ø 5.8 - 7.3 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	655.603	0.2	100	0.1	0.3	0.06	0.10	655.603	0.2	150	0.1	0.3	0.06	0.10	
	20	655.603	0.2	80	0.1	0.3	0.06	0.10	655.603	0.2	120	0.1	0.3	0.06	0.10	
	30	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	90	0.1	0.3	0.06	0.07	
	40	655.605	0.1	60	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	50	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	60	655.605	0.1	25	0.1	0.2	0.04	0.07	655.605	0.1	30	0.1	0.2	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08
		30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06
		40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06
		50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06
		60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	655.601	0.2	120	0.1	0.3	0.06	0.12	655.601	0.2	180	0.1	0.3	0.06	0.12	
	20	655.601	0.2	120	0.1	0.3	0.06	0.12	655.601	0.2	150	0.1	0.3	0.06	0.12	
	30	655.601	0.2	100	0.1	0.3	0.06	0.11	655.601	0.2	120	0.1	0.3	0.06	0.11	
	40	655.604	0.1	80	0.1	0.2	0.04	0.08	655.601	0.2	100	0.1	0.3	0.06	0.08	
	50	655.604	0.1	60	0.1	0.2	0.04	0.08	655.604	0.1	80	0.1	0.2	0.04	0.08	
	60	655.604	0.1	40	0.1	0.2	0.04	0.08	655.604	0.1	50	0.1	0.2	0.04	0.08	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	10	655.602	0.2	120	0.1	0.3	0.06	0.12	655.602	0.2	180	0.1	0.3	0.06	0.12	
	20	655.602	0.2	120	0.1	0.3	0.06	0.12	655.602	0.2	150	0.1	0.3	0.06	0.12	
	30	655.602	0.2	100	0.1	0.3	0.06	0.11	655.602	0.2	120	0.1	0.3	0.06	0.11	
	40	655.606	0.1	80	0.1	0.2	0.04	0.08	655.602	0.2	100	0.1	0.2	0.06	0.08	
	50	655.606	0.1	60	0.1	0.2	0.04	0.08	655.606	0.1	80	0.1	0.2	0.04	0.08	
	60	655.606	0.1	40	0.1	0.2	0.04	0.08	655.606	0.1	50	0.1	0.2	0.04	0.08	
S Titanium 3.7164	10	655.602	0.2	90	0.1	0.3	0.06	0.10	655.602	0.2	100	0.1	0.3	0.06	0.10	
	20	655.602	0.2	70	0.1	0.3	0.06	0.10	655.602	0.2	80	0.1	0.3	0.06	0.10	
	30	655.606	0.1	60	0.1	0.2	0.04	0.07	655.602	0.2	70	0.1	0.3	0.06	0.07	
	40	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	60	0.1	0.2	0.04	0.07	
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07	
	Ni-basic-, Co-basic-, Alloys	10	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		20	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		30	655.606	0.1	30	0.1	0.2	0.04	0.06	655.602	0.2	30	0.1	0.2	0.06	0.06
		40	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06
		50	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06

**When applying the optimized cutting data:**

- the boring diameter of 7.3 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended



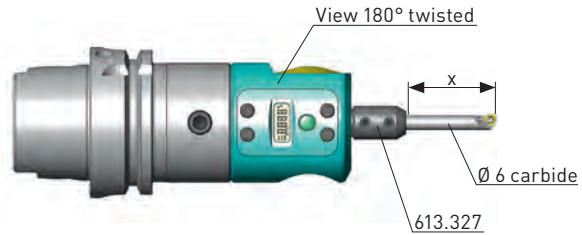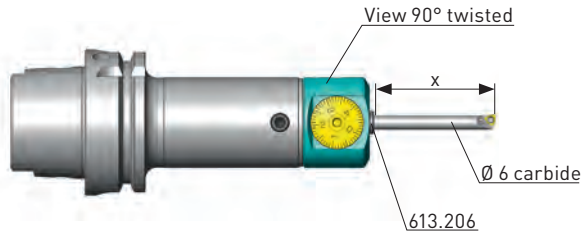

EWN 04-22


EWE 2-32

Workpiece material	Boring depth X [mm]	universal Ø 7.3 - 11.3 mm							optimized Ø 7.3 - 7.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	10	655.602	0.2	120	0.1	0.3	0.06	0.10	655.602	0.2	180	0.1	0.3	0.06	0.10	
	20	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	140	0.1	0.3	0.06	0.10	
	30	655.602	0.2	80	0.1	0.3	0.06	0.09	655.602	0.2	100	0.1	0.3	0.06	0.09	
	40	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	80	0.1	0.3	0.06	0.07	
	50	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07	
	60	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	65	655.606	0.1	30	0.1	0.2	0.04	0.07	655.606	0.1	35	0.1	0.2	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	10	655.602	0.2	120	0.1	0.3	0.06	0.10	655.602	0.2	180	0.1	0.3	0.06	0.10
		20	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	140	0.1	0.3	0.06	0.10
		30	655.602	0.2	80	0.1	0.3	0.06	0.09	655.602	0.2	100	0.1	0.3	0.06	0.09
		40	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	80	0.1	0.3	0.06	0.07
		50	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07
		60	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07
		65	655.606	0.1	30	0.1	0.2	0.04	0.07	655.606	0.1	35	0.1	0.2	0.04	0.07
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08
20		655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08	
30		655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
40		655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
50		655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06	
60		655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
65		655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08	
	20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08	
	30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
	40	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
	50	655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06	
	60	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
	65	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	110	0.1	0.3	0.06	0.08
		30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	90	0.1	0.3	0.06	0.08
		40	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06
		50	655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06
60		655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
Gray cast iron GG 15 GG 20 GG 25 GG 30	10	655.603	0.2	120	0.1	0.4	0.06	0.10	655.603	0.2	180	0.1	0.4	0.06	0.10	
	20	655.603	0.2	100	0.1	0.4	0.06	0.10	655.603	0.2	140	0.1	0.4	0.06	0.10	
	30	655.603	0.2	80	0.1	0.4	0.06	0.10	655.603	0.2	100	0.1	0.4	0.06	0.10	
	40	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	80	0.1	0.4	0.06	0.07	
	50	655.605	0.1	50	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	60	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	65	655.605	0.1	30	0.1	0.2	0.04	0.07	655.605	0.1	35	0.1	0.2	0.04	0.07	


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used. For the EWN 04-22 only short reducers are available.

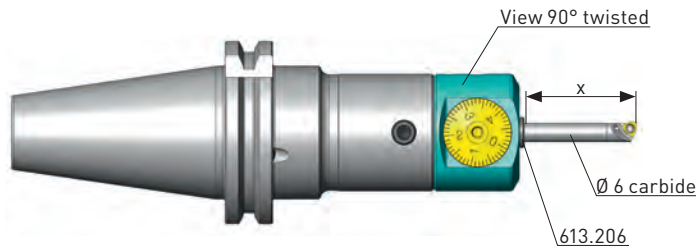

EWN 04-22

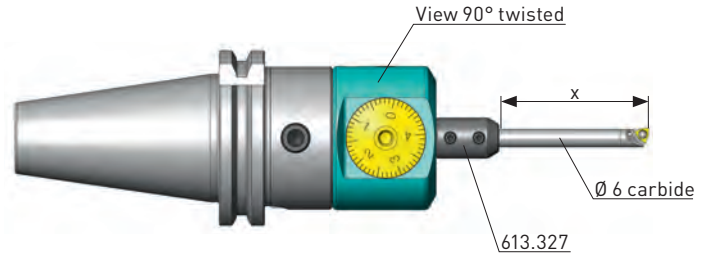


EWN 2-32


Workpiece material	Boring depth X [mm]	universal Ø 7.3 - 11.3 mm							optimized Ø 7.3 - 7.8 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	655.603	0.2	120	0.1	0.3	0.06	0.10	655.603	0.2	180	0.1	0.3	0.06	0.10	
	20	655.603	0.2	100	0.1	0.3	0.06	0.10	655.603	0.2	140	0.1	0.3	0.06	0.10	
	30	655.603	0.2	80	0.1	0.3	0.06	0.09	655.603	0.2	100	0.1	0.3	0.06	0.09	
	40	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	80	0.1	0.3	0.06	0.07	
	50	655.605	0.1	50	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	60	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	65	655.605	0.1	30	0.1	0.2	0.04	0.07	655.605	0.1	35	0.1	0.2	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08
		20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08
		40	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06
		50	655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06
		60	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06
		65	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	655.601	0.2	140	0.1	0.3	0.06	0.12	655.601	0.2	200	0.1	0.3	0.06	0.12	
	20	655.601	0.2	130	0.1	0.3	0.06	0.12	655.601	0.2	180	0.1	0.3	0.06	0.12	
	30	655.601	0.2	110	0.1	0.3	0.06	0.10	655.601	0.2	150	0.1	0.3	0.06	0.10	
	40	655.601	0.2	90	0.1	0.2	0.06	0.10	655.601	0.2	120	0.1	0.3	0.06	0.10	
	50	655.604	0.1	70	0.1	0.2	0.04	0.07	655.601	0.2	100	0.1	0.3	0.06	0.07	
	60	655.604	0.1	60	0.1	0.2	0.04	0.07	655.604	0.1	80	0.1	0.2	0.04	0.07	
	65	655.604	0.1	50	0.1	0.2	0.04	0.07	655.604	0.1	50	0.1	0.2	0.04	0.07	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	10	655.602	0.2	140	0.1	0.3	0.06	0.12	655.602	0.2	200	0.1	0.3	0.06	0.12	
	20	655.602	0.2	130	0.1	0.3	0.06	0.12	655.602	0.2	180	0.1	0.3	0.06	0.12	
	30	655.602	0.2	110	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10	
	40	655.602	0.2	90	0.1	0.2	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10	
	50	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	100	0.1	0.3	0.06	0.07	
	60	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	80	0.1	0.2	0.04	0.07	
	65	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
S Titanium 3.7164	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10	
	20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	100	0.1	0.3	0.06	0.10	
	30	655.602	0.2	60	0.1	0.3	0.06	0.09	655.602	0.2	80	0.1	0.3	0.06	0.09	
	40	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07	
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	60	0.1	0.2	0.04	0.07	
	60	655.606	0.1	30	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	65	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07	
	Ni-basic-, Co-basic-, Alloys	10	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		20	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		30	655.602	0.2	30	0.1	0.2	0.06	0.06	655.602	0.2	30	0.1	0.2	0.06	0.06
		40	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06
		50	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06

**When applying the optimized cutting data:**

- the boring diameter of 7.8 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

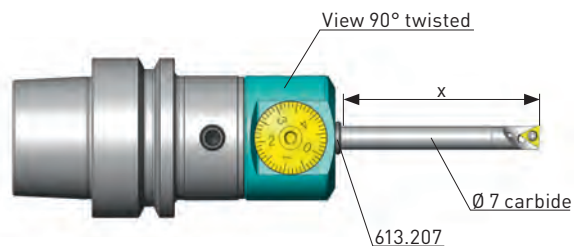

EWN 04-22

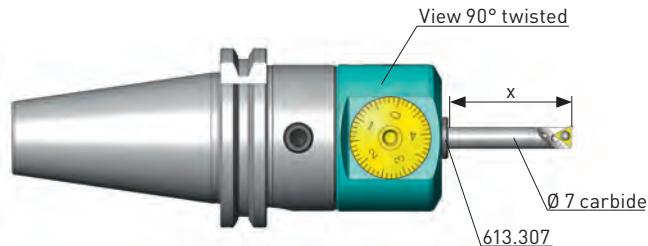


EWN 2-32

Workpiece material	Boring depth X [mm]	universal Ø 7.8 - 11.8 mm								optimized Ø 7.8 - 8.8 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.738	0.3	180	0.1	0.5	0.08	0.12	
	30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.738	0.3	150	0.1	0.5	0.08	0.12	
	40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	110	0.1	0.4	0.06	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.738	0.3	180	0.1	0.5	0.08	0.12
		30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.738	0.3	150	0.1	0.5	0.08	0.12
		40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	110	0.1	0.4	0.06	0.10
		50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.1	0.4	0.06	0.10
		60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08
		70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08
		75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
30		651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10	
40		651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
50		651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08	
60		651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
70		651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
75		651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10	
	30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10	
	40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
	50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08	
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
	75	651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10
		30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	120	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
		75	651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06
	Gray cast iron GG 15 GG 20 GG 25 GG 30	20	651.837	0.2	120	0.1	0.6	0.06	0.12	651.735	0.3	180	0.1	0.6	0.08	0.12
30		651.837	0.2	100	0.1	0.6	0.06	0.12	651.735	0.3	150	0.1	0.6	0.08	0.12	
40		651.837	0.2	90	0.1	0.6	0.06	0.10	651.735	0.3	110	0.1	0.6	0.08	0.10	
50		651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.1	0.4	0.06	0.10	
60		651.824	0.1	55	0.1	0.4	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
70		651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
75		651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	


**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used.

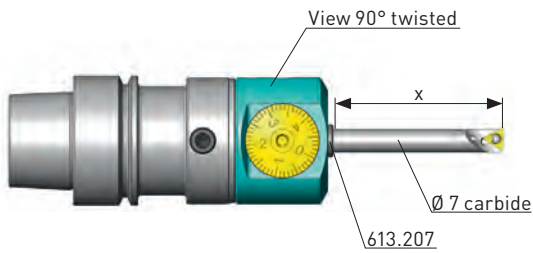

EWN 04-22


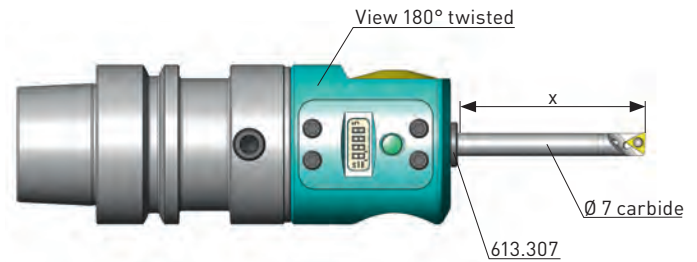


EWE 2-32

Workpiece material	Boring depth X [mm]	universal Ø 7.8 - 11.8 mm						optimized Ø 7.8 - 8.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50  GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.735	0.3	180	0.1	0.5	0.08	0.12
	30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.735	0.3	150	0.1	0.5	0.08	0.12
	40	651.837	0.2	90	0.1	0.4	0.06	0.10	651.735	0.3	110	0.1	0.5	0.08	0.10
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.1	0.4	0.06	0.10
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08
	75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07
	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
	30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10
	40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08
	50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
	75	651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365  Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	20	651.825	0.2	150	0.1	0.5	0.06	0.14	651.723	0.3	220	0.1	0.5	0.08	0.14
	30	651.825	0.2	130	0.1	0.5	0.06	0.14	651.723	0.3	200	0.1	0.5	0.08	0.14
	40	651.825	0.2	110	0.1	0.5	0.06	0.12	651.723	0.3	180	0.1	0.5	0.08	0.12
	50	651.823	0.1	90	0.1	0.4	0.04	0.12	651.825	0.2	130	0.1	0.4	0.06	0.12
	60	651.823	0.1	70	0.1	0.3	0.04	0.10	651.825	0.2	100	0.1	0.4	0.06	0.10
	70	651.823	0.1	60	0.1	0.3	0.04	0.08	651.823	0.1	70	0.1	0.3	0.04	0.08
	75	651.823	0.1	40	0.1	0.3	0.04	0.08	651.823	0.1	40	0.1	0.3	0.04	0.08
	20	651.837	0.2	150	0.1	0.5	0.06	0.14	651.737	0.3	220	0.1	0.5	0.08	0.14
	30	651.837	0.2	130	0.1	0.5	0.06	0.14	651.737	0.3	200	0.1	0.5	0.08	0.14
	40	651.837	0.2	110	0.1	0.5	0.06	0.12	651.737	0.3	180	0.1	0.5	0.08	0.12
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	50	651.824	0.1	90	0.1	0.4	0.04	0.12	651.837	0.2	130	0.1	0.4	0.06	0.12
	60	651.824	0.1	70	0.1	0.3	0.04	0.10	651.837	0.2	100	0.1	0.4	0.06	0.10
	70	651.824	0.1	60	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08
	75	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	40	0.1	0.3	0.04	0.08
	20	651.837	0.2	100	0.1	0.5	0.06	0.12	651.737	0.3	120	0.1	0.5	0.08	0.12
	30	651.837	0.2	80	0.1	0.5	0.06	0.12	651.737	0.3	100	0.1	0.5	0.08	0.12
	40	651.824	0.1	60	0.1	0.4	0.04	0.10	651.837	0.2	80	0.1	0.4	0.06	0.10
	50	651.824	0.1	50	0.1	0.4	0.04	0.10	651.837	0.2	70	0.1	0.4	0.06	0.10
	60	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	60	0.1	0.3	0.04	0.08
	70	651.824	0.1	30	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08
	75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07
	20	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10
	30	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10
	40	651.824	0.1	30	0.1	0.3	0.04	0.08	651.839	0.2	30	0.1	0.3	0.06	0.08
50	651.824	0.1	30	0.1	0.3	0.04	0.08	651.824	0.1	30	0.1	0.3	0.04	0.08	
60	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	

**When applying the optimized cutting data:**

- the boring diameter of 8.8 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

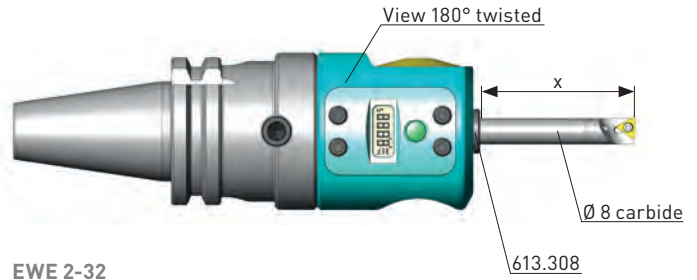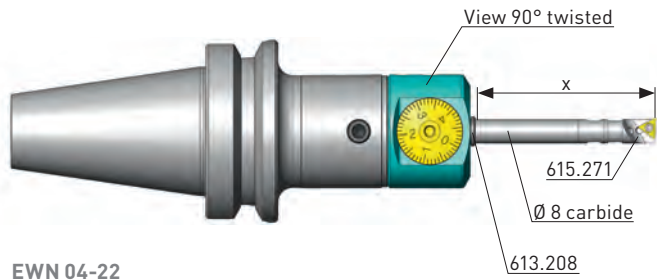

EWN 04-22

EWE 2-32


Workpiece material	Boring depth X [mm]	universal Ø 8.8 - 12.8 mm							optimized Ø 8.8 - 10.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.738	0.3	200	0.1	0.5	0.08	0.12	
	30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.738	0.3	160	0.1	0.5	0.08	0.12	
	40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	120	0.1	0.4	0.06	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	100	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.738	0.3	200	0.1	0.5	0.08	0.12
		30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.738	0.3	160	0.1	0.5	0.08	0.12
		40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	120	0.1	0.4	0.06	0.10
		50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	100	0.1	0.4	0.06	0.10
		60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08
		70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08
		75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10
30		651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10	
40		651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
50		651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08	
60		651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
70		651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
75		651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10	
	30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10	
	40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
	50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08	
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
	75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
		30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	130	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
		75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06
	Gray cast iron GG 15 GG 20 GG 25 GG 30	20	651.837	0.2	130	0.1	0.6	0.06	0.12	651.735	0.3	200	0.1	0.6	0.08	0.12
30		651.837	0.2	110	0.1	0.6	0.06	0.12	651.735	0.3	160	0.1	0.6	0.08	0.12	
40		651.837	0.2	90	0.1	0.6	0.06	0.10	651.735	0.3	120	0.1	0.6	0.08	0.10	
50		651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	100	0.1	0.4	0.06	0.10	
60		651.824	0.1	55	0.1	0.4	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
70		651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
75		651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07	

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data for the fine boring heads EWN 04-22 and EWN/EWE 2-32 are the same. On all boring heads the same tool holders will be used.



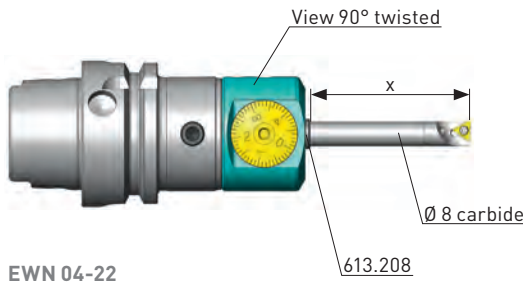

EWN 04-22

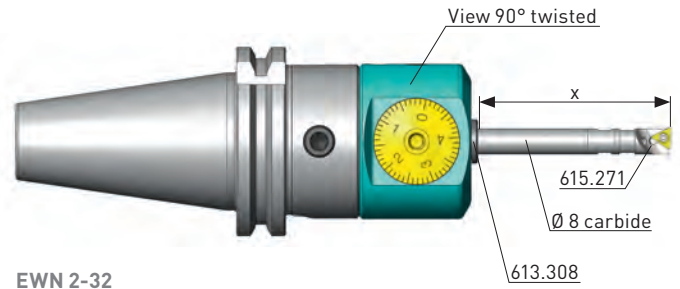


EWN 2-32

Workpiece material	Boring depth X [mm]	universal Ø 8.8 - 12.8 mm								optimized Ø 8.8 - 10.0 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U			
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.735	0.3	200	0.1	0.5	0.08	0.12		
	30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.735	0.3	160	0.1	0.5	0.08	0.12		
	40	651.837	0.2	90	0.1	0.4	0.06	0.10	651.735	0.3	120	0.1	0.5	0.08	0.10		
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	100	0.1	0.4	0.06	0.10		
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08		
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08		
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07		
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10	
		30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10	
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08	
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
		75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	20	651.825	0.2	180	0.1	0.5	0.06	0.14	651.723	0.3	260	0.1	0.5	0.08	0.14		
	30	651.825	0.2	170	0.1	0.5	0.06	0.14	651.723	0.3	260	0.1	0.5	0.08	0.14		
	40	651.825	0.2	150	0.1	0.5	0.06	0.12	651.723	0.3	200	0.1	0.5	0.08	0.12		
	50	651.823	0.1	120	0.1	0.4	0.04	0.12	651.825	0.2	150	0.1	0.4	0.06	0.12		
	60	651.823	0.1	80	0.1	0.3	0.04	0.10	651.825	0.2	120	0.1	0.4	0.06	0.1		
	70	651.823	0.1	70	0.1	0.3	0.04	0.08	651.823	0.1	80	0.1	0.3	0.04	0.08		
	75	651.823	0.1	60	0.1	0.3	0.04	0.08	651.823	0.1	70	0.1	0.3	0.04	0.08		
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	20	651.837	0.2	180	0.1	0.5	0.06	0.14	651.737	0.3	260	0.1	0.5	0.08	0.14		
	30	651.837	0.2	170	0.1	0.5	0.06	0.14	651.737	0.3	260	0.1	0.5	0.08	0.14		
	40	651.837	0.2	150	0.1	0.5	0.06	0.12	651.737	0.3	200	0.1	0.5	0.08	0.12		
	50	651.824	0.1	120	0.1	0.4	0.04	0.12	651.837	0.2	150	0.1	0.4	0.06	0.12		
	60	651.824	0.1	80	0.1	0.3	0.04	0.10	651.837	0.2	120	0.1	0.4	0.06	0.1		
	70	651.824	0.1	70	0.1	0.3	0.04	0.08	651.824	0.1	80	0.1	0.3	0.04	0.08		
	75	651.824	0.1	60	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08		
S Titanium 3.7164	20	651.837	0.2	100	0.1	0.5	0.06	0.12	651.737	0.3	120	0.1	0.5	0.08	0.12		
	30	651.837	0.2	80	0.1	0.5	0.06	0.12	651.737	0.3	100	0.1	0.5	0.08	0.12		
	40	651.824	0.1	70	0.1	0.4	0.04	0.10	651.837	0.2	80	0.1	0.4	0.06	0.10		
	50	651.824	0.1	60	0.1	0.4	0.04	0.10	651.837	0.2	70	0.1	0.4	0.06	0.10		
	60	651.824	0.1	50	0.1	0.3	0.04	0.08	651.824	0.1	60	0.1	0.3	0.04	0.08		
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08		
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	40	0.1	0.3	0.04	0.07		
	Ni-basic-, Co-basic-, Alloys	20	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
		30	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
		40	651.824	0.1	30	0.1	0.3	0.04	0.08	651.839	0.2	30	0.1	0.3	0.06	0.08	
		50	651.824	0.1	30	0.1	0.3	0.04	0.08	651.839	0.2	30	0.1	0.3	0.04	0.08	
		60	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	

**When applying the optimized cutting data:**

- the boring diameter of 10.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

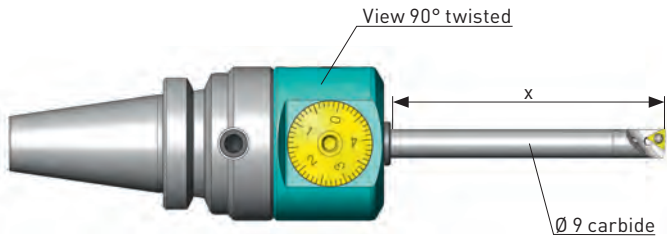


EWN 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 10.0 - 14.0 mm							optimized Ø 9.8 - 12.0 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	35	651.837	0.2	110	0.2	0.6	0.06	0.14	651.738	0.3	160	0.2	0.6	0.08	0.14
	45	651.837	0.2	90	0.2	0.6	0.06	0.12	651.738	0.3	120	0.2	0.6	0.08	0.12
	55	651.824	0.1	70	0.2	0.4	0.04	0.12	651.838	0.2	100	0.2	0.4	0.06	0.12
	70	651.824	0.1	55	0.2	0.4	0.04	0.10	651.838	0.2	70	0.2	0.4	0.06	0.10
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08
	35	651.837	0.2	110	0.2	0.6	0.06	0.14	651.738	0.3	160	0.2	0.6	0.08	0.14
	45	651.837	0.2	90	0.2	0.6	0.06	0.12	651.738	0.3	120	0.2	0.6	0.08	0.12
	55	651.824	0.1	70	0.2	0.4	0.04	0.12	651.838	0.2	100	0.2	0.4	0.06	0.12
	70	651.824	0.1	55	0.2	0.4	0.04	0.10	651.838	0.2	70	0.2	0.4	0.06	0.10
P Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	35	651.837	0.2	110	0.2	0.6	0.06	0.14	651.738	0.3	160	0.2	0.6	0.08	0.14
	45	651.837	0.2	90	0.2	0.6	0.06	0.12	651.738	0.3	120	0.2	0.6	0.08	0.12
	55	651.824	0.1	70	0.2	0.4	0.04	0.12	651.838	0.2	100	0.2	0.4	0.06	0.12
	70	651.824	0.1	55	0.2	0.4	0.04	0.10	651.838	0.2	70	0.2	0.4	0.06	0.10
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08
	35	651.837	0.2	110	0.2	0.6	0.06	0.14	651.737	0.3	150	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	35	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08
	35	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
K Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	35	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08
	35	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	130	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	110	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	90	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	35	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	130	0.2	0.6	0.08	0.12
	45	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	110	0.2	0.6	0.08	0.10
	55	651.824	0.1	70	0.2	0.4	0.04	0.10	651.837	0.2	90	0.2	0.4	0.06	0.10
	70	651.824	0.1	55	0.2	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08
K Gray cast iron GG 15 GG 20 GG 25 GG 30	35	651.837	0.2	110	0.2	0.8	0.06	0.14	651.735	0.3	160	0.2	0.8	0.08	0.14
	45	651.837	0.2	90	0.2	0.6	0.06	0.12	651.735	0.3	120	0.2	0.6	0.08	0.12
	55	651.824	0.1	70	0.2	0.6	0.04	0.10	651.834	0.2	100	0.2	0.6	0.06	0.12
	70	651.824	0.1	55	0.2	0.4	0.04	0.10	651.834	0.2	70	0.2	0.4	0.06	0.10
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories.

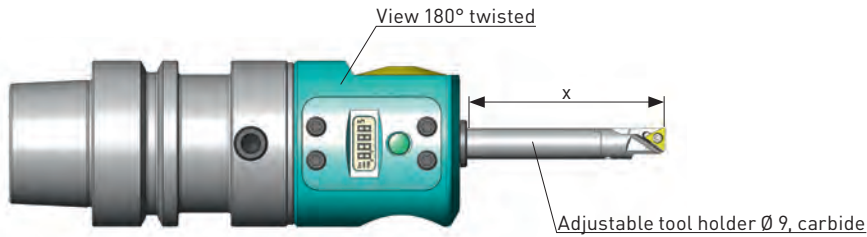


EWE 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 10.0 - 14.0 mm							optimized Ø 9.8 - 12.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	35	651.837	0.2	110	0.2	0.6	0.06	0.14	651.735	0.3	160	0.2	0.6	0.08	0.14	
	45	651.837	0.2	90	0.2	0.6	0.06	0.12	651.735	0.3	120	0.2	0.6	0.08	0.12	
	55	651.824	0.1	70	0.2	0.4	0.04	0.12	651.834	0.2	100	0.2	0.4	0.06	0.12	
	70	651.824	0.1	55	0.2	0.4	0.04	0.10	651.834	0.2	70	0.2	0.4	0.06	0.10	
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	35	651.825	0.2	170	0.2	0.6	0.06	0.16	651.723	0.3	260	0.2	0.6	0.08	0.16	
	45	651.825	0.2	140	0.2	0.6	0.06	0.14	651.723	0.3	200	0.2	0.6	0.08	0.14	
	55	651.825	0.2	110	0.2	0.5	0.06	0.14	651.723	0.3	160	0.2	0.5	0.08	0.14	
	70	651.823	0.1	80	0.2	0.4	0.04	0.12	651.825	0.2	120	0.2	0.4	0.06	0.12	
	85	651.823	0.1	60	0.2	0.4	0.04	0.12	651.823	0.1	80	0.2	0.4	0.04	0.12	
	100	651.823	0.1	40	0.2	0.4	0.04	0.10	651.823	0.1	40	0.2	0.4	0.04	0.10	
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	35	651.837	0.2	170	0.2	0.6	0.06	0.16	651.737	0.3	260	0.2	0.6	0.08	0.16	
	45	651.837	0.2	140	0.2	0.6	0.06	0.14	651.737	0.3	200	0.2	0.6	0.08	0.14	
	55	651.837	0.2	110	0.2	0.5	0.06	0.14	651.737	0.3	160	0.2	0.5	0.08	0.14	
	70	651.824	0.1	80	0.2	0.4	0.04	0.12	651.837	0.2	120	0.2	0.4	0.06	0.12	
	85	651.824	0.1	60	0.2	0.4	0.04	0.12	651.824	0.1	80	0.2	0.4	0.04	0.12	
	100	651.824	0.1	40	0.2	0.4	0.04	0.10	651.824	0.1	40	0.2	0.4	0.04	0.10	
S Titanium 3.7164	35	651.837	0.2	80	0.2	0.6	0.06	0.14	651.737	0.3	100	0.2	0.6	0.08	0.14	
	45	651.837	0.2	70	0.2	0.6	0.06	0.12	651.837	0.2	80	0.2	0.6	0.06	0.12	
	55	651.824	0.1	60	0.2	0.4	0.04	0.12	651.837	0.2	70	0.2	0.4	0.06	0.12	
	70	651.824	0.1	50	0.2	0.4	0.04	0.10	651.824	0.1	60	0.2	0.4	0.04	0.10	
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	40	0.2	0.4	0.04	0.08	
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
S Ni-basic-, Co-basic-, Alloys	35	651.839	0.2	50	0.2	0.5	0.06	0.12	651.839	0.2	50	0.2	0.5	0.06	0.12	
	45	651.839	0.2	30	0.2	0.5	0.06	0.10	651.839	0.2	30	0.2	0.5	0.06	0.10	
	55	651.824	0.1	30	0.2	0.4	0.04	0.08	651.839	0.2	30	0.2	0.4	0.06	0.08	
	70	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 12.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

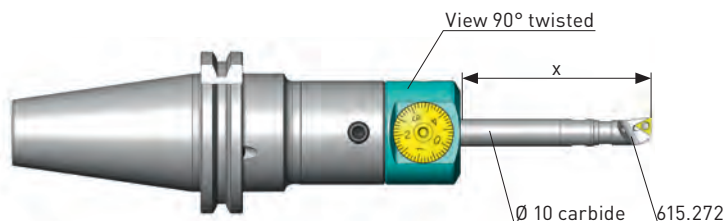


EWN 04-22

Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 15.8mm							optimized Ø 11.8 - 13.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	20	651.837	0.2	150	0.2	0.8	0.06	0.14	651.738	0.3	200	0.2	0.8	0.08	0.14	
	30	651.837	0.2	150	0.2	0.8	0.06	0.14	651.738	0.3	180	0.2	0.8	0.08	0.14	
	40	651.837	0.2	120	0.2	0.6	0.06	0.12	651.738	0.3	150	0.2	0.6	0.08	0.12	
	50	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	120	0.2	0.6	0.06	0.12	
	60	651.824	0.1	90	0.2	0.4	0.04	0.10	651.838	0.2	100	0.2	0.4	0.06	0.10	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.837	0.2	150	0.2	0.8	0.06	0.14	651.738	0.3	200	0.2	0.8	0.08	0.14
		30	651.837	0.2	150	0.2	0.8	0.06	0.14	651.738	0.3	180	0.2	0.8	0.08	0.14
		40	651.837	0.2	120	0.2	0.6	0.06	0.12	651.738	0.3	150	0.2	0.6	0.08	0.12
		50	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	120	0.2	0.6	0.06	0.12
		60	651.824	0.1	90	0.2	0.4	0.04	0.10	651.838	0.2	100	0.2	0.4	0.06	0.10
		70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08
		80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
		Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	20	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	180	0.2	0.8	0.08
	30		651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	160	0.2	0.8	0.08	0.12
40	651.837		0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	140	0.2	0.6	0.08	0.10	
50	651.837		0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10	
60	651.824		0.1	90	0.2	0.4	0.04	0.08	651.837	0.2	100	0.2	0.4	0.06	0.08	
70	651.824		0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
80	651.824		0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20		651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	180	0.2	0.8	0.08	0.12
	30	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	160	0.2	0.8	0.08	0.12	
	40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	140	0.2	0.6	0.08	0.10	
	50	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10	
	60	651.824	0.1	90	0.2	0.4	0.04	0.08	651.837	0.2	100	0.2	0.4	0.06	0.08	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	20	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	160	0.2	0.8	0.08	0.12
		30	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	140	0.2	0.8	0.08	0.12
		40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	130	0.2	0.6	0.08	0.10
		50	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10
		60	651.824	0.1	90	0.2	0.4	0.04	0.08	651.837	0.2	100	0.2	0.4	0.06	0.08
		70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08
		80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
		Gray cast iron GG 15 GG 20 GG 25 GG 30	20	651.837	0.2	150	0.2	0.8	0.06	0.14	651.735	0.3	200	0.2	0.8	0.08
	30		651.837	0.2	150	0.2	0.8	0.06	0.14	651.735	0.3	180	0.2	0.8	0.08	0.14
40	651.837		0.2	120	0.2	0.6	0.06	0.12	651.735	0.3	150	0.2	0.6	0.08	0.12	
50	651.837		0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	120	0.2	0.6	0.06	0.12	
60	651.824		0.1	90	0.2	0.4	0.04	0.10	651.834	0.2	100	0.2	0.4	0.06	0.10	
70	651.824		0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring head EWN 04-22 and the corresponding accessories.

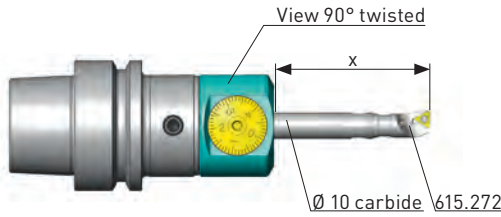


EWN 04-22

Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 15.8 mm							optimized Ø 11.8 - 13.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	20	651.837	0.2	150	0.2	0.8	0.06	0.14	651.735	0.3	200	0.2	0.8	0.08	0.14	
	30	651.837	0.2	150	0.2	0.8	0.06	0.14	651.735	0.3	180	0.2	0.8	0.08	0.14	
	40	651.837	0.2	120	0.2	0.6	0.06	0.12	651.735	0.3	150	0.2	0.6	0.08	0.12	
	50	651.837	0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	120	0.2	0.6	0.06	0.12	
	60	651.824	0.1	90	0.2	0.4	0.04	0.10	651.834	0.2	100	0.2	0.4	0.06	0.10	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	180	0.2	0.8	0.08	0.12
		30	651.837	0.2	150	0.2	0.8	0.06	0.12	651.737	0.3	160	0.2	0.8	0.08	0.12
		40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	140	0.2	0.6	0.08	0.10
		50	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10
		60	651.824	0.1	90	0.2	0.4	0.04	0.08	651.837	0.2	100	0.2	0.4	0.06	0.08
		70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08
		80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365		20	651.825	0.2	180	0.2	0.8	0.06	0.16	651.723	0.3	300	0.2	0.8	0.08	0.16
	30	651.825	0.2	180	0.2	0.8	0.06	0.16	651.723	0.3	300	0.2	0.8	0.08	0.16	
	40	651.825	0.2	180	0.2	0.6	0.06	0.14	651.723	0.3	250	0.2	0.6	0.08	0.14	
	50	651.825	0.2	160	0.2	0.6	0.06	0.14	651.723	0.3	200	0.2	0.6	0.08	0.14	
	60	651.823	0.1	140	0.2	0.4	0.04	0.12	651.825	0.2	180	0.2	0.4	0.06	0.12	
	70	651.823	0.1	100	0.2	0.4	0.04	0.12	651.825	0.2	120	0.2	0.4	0.06	0.12	
	80	651.823	0.1	60	0.2	0.4	0.04	0.10	651.823	0.1	80	0.2	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	20	651.837	0.2	180	0.2	0.8	0.06	0.16	651.737	0.3	300	0.2	0.8	0.08	0.16
30		651.837	0.2	180	0.2	0.8	0.06	0.16	651.737	0.3	300	0.2	0.8	0.08	0.16	
40		651.837	0.2	180	0.2	0.6	0.06	0.14	651.737	0.3	250	0.2	0.6	0.08	0.14	
50		651.837	0.2	160	0.2	0.6	0.06	0.14	651.737	0.3	200	0.2	0.6	0.08	0.14	
60		651.824	0.1	140	0.2	0.4	0.04	0.12	651.837	0.2	180	0.2	0.4	0.06	0.12	
70		651.824	0.1	100	0.2	0.4	0.04	0.12	651.837	0.2	120	0.2	0.4	0.06	0.12	
80		651.824	0.1	60	0.2	0.4	0.04	0.10	651.824	0.1	80	0.2	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys		20	651.837	0.2	120	0.2	0.8	0.06	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14
	30	651.837	0.2	120	0.2	0.8	0.06	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	40	651.837	0.2	100	0.2	0.6	0.06	0.12	651.737	0.3	100	0.2	0.6	0.06	0.12	
	50	651.837	0.2	100	0.2	0.6	0.06	0.12	651.837	0.2	100	0.2	0.6	0.06	0.12	
	60	651.824	0.1	80	0.2	0.4	0.04	0.10	651.837	0.2	80	0.2	0.4	0.04	0.10	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08	
	80	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	40	0.2	0.4	0.04	0.08	
	20	651.839	0.2	50	0.2	0.8	0.06	0.12	651.839	0.2	50	0.2	0.8	0.06	0.12	
	30	651.839	0.2	50	0.2	0.8	0.06	0.12	651.839	0.2	50	0.2	0.8	0.06	0.12	
	40	651.839	0.2	40	0.2	0.6	0.06	0.10	651.839	0.2	40	0.2	0.6	0.06	0.10	
	50	651.824	0.1	30	0.2	0.6	0.04	0.08	651.839	0.2	30	0.2	0.6	0.06	0.08	
	60	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
	70	651.824	0.1	20	0.2	0.4	0.04	0.08	651.824	0.1	20	0.2	0.4	0.04	0.08	

**When applying the optimized cutting data:**

- the boring diameter of 13.8 mm may not be exceeded
- the use of a fine balanced tool shank



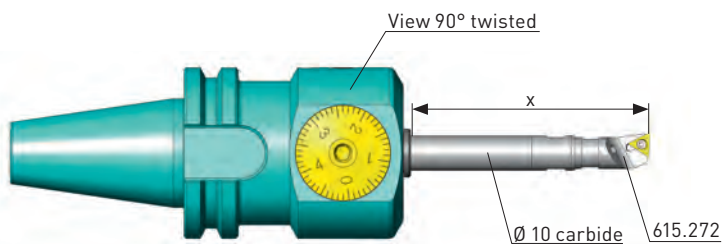


EWN 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 15.8 mm							optimized Ø 11.8 - 14.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	20	651.737	0.3	150	0.2	0.8	0.08	0.14								
	30	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	230	0.2	0.8	0.08	0.14	
	40	651.837	0.2	120	0.2	0.6	0.06	0.12	651.738	0.3	210	0.2	0.8	0.08	0.12	
	55	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12	
	70	651.824	0.1	70	0.2	0.4	0.04	0.10	651.838	0.2	130	0.2	0.6	0.06	0.10	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	100								651.824	0.1	40	0.2	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.737	0.3	150	0.2	0.8	0.08	0.14							
		30	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	230	0.2	0.8	0.08	0.14
		40	651.837	0.2	120	0.2	0.6	0.06	0.12	651.738	0.3	210	0.2	0.8	0.08	0.12
55		651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12	
70		651.824	0.1	70	0.2	0.4	0.04	0.10	651.838	0.2	130	0.2	0.6	0.06	0.10	
90		651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
100									651.824	0.1	40	0.2	0.4	0.04	0.08	
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764		20	651.737	0.3	150	0.2	0.8	0.08	0.12							
	30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	210	0.2	0.8	0.08	0.12	
	40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10	
	55	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	150	0.2	0.6	0.06	0.10	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.837	0.2	130	0.2	0.6	0.06	0.08	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	100								651.824	0.1	40	0.2	0.4	0.04	0.08	
	Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20	651.737	0.3	150	0.2	0.8	0.08	0.12							
30		651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	210	0.2	0.8	0.08	0.12	
40		651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10	
55		651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	150	0.2	0.6	0.06	0.10	
70		651.824	0.1	70	0.2	0.4	0.04	0.08	651.837	0.2	130	0.2	0.6	0.06	0.08	
90		651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
100									651.824	0.1	40	0.2	0.4	0.04	0.08	
Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571		20	651.737	0.3	150	0.2	0.8	0.08	0.12							
		30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	190	0.2	0.8	0.08	0.12
		40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	170	0.2	0.8	0.08	0.10
	55	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	150	0.2	0.6	0.06	0.10	
	70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.837	0.2	130	0.2	0.6	0.06	0.08	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	100								651.824	0.1	40	0.2	0.4	0.04	0.08	
Gray cast iron GG 15 GG 20 GG 25 GG 30	20	651.735	0.3	150	0.2	0.8	0.08	0.14								
	30	651.735	0.3	150	0.2	0.8	0.08	0.14	651.735	0.3	230	0.2	0.8	0.08	0.14	
	40	651.834	0.2	120	0.2	0.6	0.06	0.12	651.735	0.3	210	0.2	0.8	0.08	0.12	
	55	651.834	0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	160	0.2	0.6	0.06	0.12	
	70	651.824	0.1	70	0.2	0.4	0.04	0.10	651.834	0.2	130	0.2	0.6	0.06	0.10	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
100								651.824	0.1	40	0.2	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories.

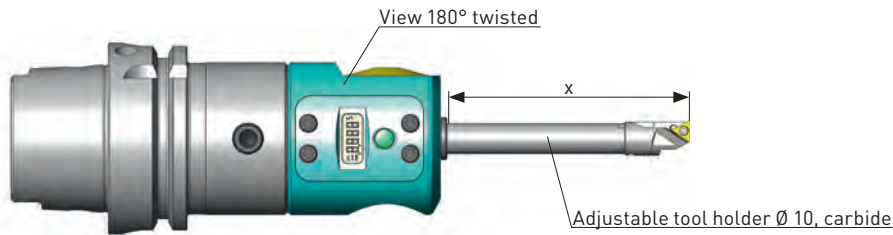


EWE 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 15.8 mm							optimized Ø 11.8 - 14.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	20	651.735	0.3	150	0.2	0.8	0.08	0.14								
	30	651.735	0.3	150	0.2	0.8	0.08	0.14	651.735	0.3	230	0.2	0.8	0.08	0.14	
	40	651.834	0.2	120	0.2	0.6	0.06	0.12	651.735	0.3	210	0.2	0.8	0.08	0.12	
	55	651.834	0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	160	0.2	0.6	0.06	0.12	
	70	651.824	0.1	70	0.2	0.4	0.04	0.10	651.834	0.2	130	0.2	0.6	0.06	0.10	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
	100								651.824	0.1	40	0.2	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.737	0.3	150	0.2	0.8	0.08	0.12							
		30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	210	0.2	0.8	0.08	0.12
		40	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10
		55	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	150	0.2	0.6	0.06	0.10
		70	651.824	0.1	70	0.2	0.4	0.04	0.08	651.837	0.2	130	0.2	0.6	0.06	0.08
90		651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	80	0.2	0.4	0.04	0.08	
100									651.824	0.1	40	0.2	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	20	651.723	0.3	180	0.2	0.8	0.08	0.16								
	30	651.723	0.3	180	0.2	0.8	0.08	0.16	651.723	0.3	340	0.2	0.8	0.08	0.16	
	40	651.723	0.3	180	0.2	0.6	0.08	0.14	651.723	0.3	320	0.2	0.8	0.08	0.14	
	55	651.825	0.2	150	0.2	0.6	0.06	0.14	651.723	0.3	250	0.2	0.6	0.08	0.14	
	70	651.825	0.2	100	0.2	0.4	0.06	0.12	651.825	0.2	180	0.2	0.6	0.06	0.12	
	90	651.823	0.1	60	0.2	0.4	0.04	0.12	651.823	0.1	120	0.2	0.4	0.04	0.12	
	100								651.823	0.1	70	0.2	0.4	0.04	0.10	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	20	651.737	0.3	180	0.2	0.8	0.08	0.16								
	30	651.737	0.3	180	0.2	0.8	0.08	0.16	651.737	0.3	340	0.2	0.8	0.08	0.16	
	40	651.737	0.3	180	0.2	0.6	0.08	0.14	651.737	0.3	320	0.2	0.8	0.08	0.14	
	55	651.837	0.2	150	0.2	0.6	0.06	0.14	651.737	0.3	250	0.2	0.6	0.08	0.14	
	70	651.837	0.2	100	0.2	0.4	0.06	0.12	651.837	0.2	180	0.2	0.6	0.06	0.12	
	90	651.824	0.1	60	0.2	0.4	0.04	0.12	651.824	0.1	120	0.2	0.4	0.04	0.12	
	100								651.824	0.1	70	0.2	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	20	651.737	0.3	100	0.2	0.8	0.08	0.14								
	30	651.737	0.3	80	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	40	651.837	0.2	70	0.2	0.6	0.06	0.12	651.737	0.3	100	0.2	0.8	0.08	0.12	
	55	651.837	0.2	60	0.2	0.6	0.06	0.12	651.837	0.2	80	0.2	0.6	0.06	0.12	
	70	651.824	0.1	50	0.2	0.4	0.04	0.10	651.837	0.2	60	0.2	0.6	0.06	0.10	
	90	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.2	0.4	0.04	0.08	
	100								651.824	0.1	40	0.2	0.4	0.04	0.08	
	20	651.839	0.2	50	0.2	0.6	0.06	0.12								
	30	651.839	0.2	50	0.2	0.6	0.06	0.12	651.839	0.2	50	0.2	0.6	0.06	0.12	
	40	651.839	0.2	40	0.2	0.6	0.06	0.10	651.839	0.2	50	0.2	0.6	0.06	0.10	
	55	651.824	0.1	30	0.2	0.4	0.04	0.10	651.839	0.2	40	0.2	0.6	0.06	0.10	
	70	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
90	651.824	0.1	20	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08		

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 14.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

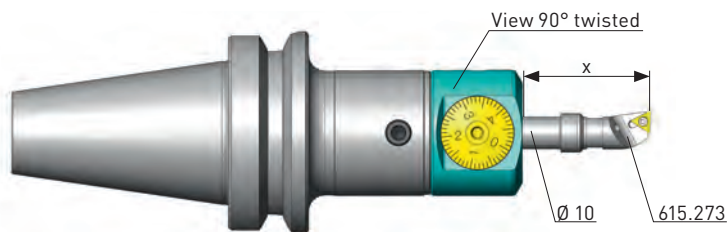


EWN 04-22

Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 17.8 mm							optimized Ø 13.8 - 14.8 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	25	651.837	0.2	150	0.2	0.6	0.06	0.12	651.738	0.3	180	0.2	0.6	0.08	0.12
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.738	0.3	150	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.838	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.838	0.2	60	0.2	0.6	0.06	0.10
	25	651.837	0.2	150	0.2	0.6	0.06	0.12	651.738	0.3	180	0.2	0.6	0.08	0.12
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.738	0.3	150	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.838	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.838	0.2	60	0.2	0.6	0.06	0.10
	25	651.837	0.2	150	0.2	0.6	0.06	0.10	651.737	0.3	170	0.2	0.6	0.08	0.10
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	140	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.837	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.08	651.837	0.2	60	0.2	0.6	0.06	0.08
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	25	651.837	0.2	150	0.2	0.6	0.06	0.10	651.737	0.3	170	0.2	0.6	0.08	0.10
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	140	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.837	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.08	651.837	0.2	60	0.2	0.6	0.06	0.08
	25	651.837	0.2	150	0.2	0.6	0.06	0.10	651.737	0.3	160	0.2	0.6	0.08	0.10
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.737	0.3	130	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.837	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.837	0.2	60	0.2	0.6	0.06	0.10
	25	651.837	0.2	150	0.2	0.6	0.06	0.12	651.735	0.3	180	0.2	0.6	0.08	0.12
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.735	0.3	150	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.834	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.834	0.2	60	0.2	0.6	0.06	0.10

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring head EWN 04-22. The tool holder is made out of steel. The max boring depth is limited to 45 mm.

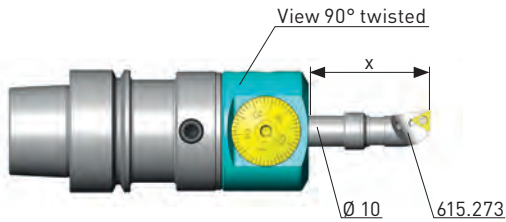


EWN 04-22

Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 17.8 mm							optimized Ø 13.8 - 14.8 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	25	651.837	0.2	150	0.2	0.6	0.06	0.12	651.735	0.3	180	0.2	0.6	0.08	0.12
	35	651.837	0.2	120	0.2	0.6	0.06	0.10	651.735	0.3	150	0.2	0.6	0.08	0.10
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.834	0.2	100	0.2	0.6	0.06	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.834	0.2	60	0.2	0.6	0.06	0.10
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	25	651.825	0.2	150	0.2	0.6	0.06	0.15	651.723	0.3	200	0.2	0.6	0.08	0.15
	35	651.825	0.2	120	0.2	0.6	0.06	0.12	651.723	0.3	170	0.2	0.6	0.08	0.12
	40	651.825	0.2	90	0.2	0.6	0.06	0.10	651.723	0.3	120	0.2	0.6	0.08	0.10
	45	651.825	0.2	60	0.2	0.6	0.06	0.10	651.825	0.2	70	0.2	0.6	0.06	0.10
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	25	651.837	0.2	150	0.2	0.6	0.06	0.15	651.737	0.3	200	0.2	0.6	0.08	0.15
	35	651.837	0.2	120	0.2	0.6	0.06	0.12	651.737	0.3	170	0.2	0.6	0.08	0.12
	40	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
	45	651.837	0.2	60	0.2	0.6	0.06	0.10	651.837	0.2	70	0.2	0.6	0.06	0.10
Titanium 3.7164	25	651.837	0.2	100	0.2	0.6	0.06	0.12	651.737	0.3	100	0.2	0.6	0.08	0.12
	35	651.837	0.2	80	0.2	0.6	0.06	0.10	651.737	0.3	80	0.2	0.6	0.08	0.10
	40	651.837	0.2	70	0.2	0.6	0.06	0.10	651.837	0.2	70	0.2	0.6	0.06	0.10
	45	651.837	0.2	50	0.2	0.6	0.06	0.10	651.837	0.2	50	0.2	0.6	0.06	0.10
Ni-basic-, Co-basic-, Alloys	25	651.839	0.2	30	0.2	0.6	0.06	0.10	651.839	0.2	30	0.2	0.6	0.06	0.10
	35	651.839	0.2	30	0.2	0.6	0.06	0.10	651.839	0.2	30	0.2	0.6	0.06	0.10
	40	651.839	0.2	25	0.2	0.6	0.06	0.10	651.839	0.2	25	0.2	0.6	0.06	0.10
	45	651.839	0.2	20	0.2	0.6	0.06	0.08	651.839	0.2	20	0.2	0.6	0.06	0.08

**When applying the optimized cutting data:**

- the boring diameter of 14.8 mm may not be exceeded.

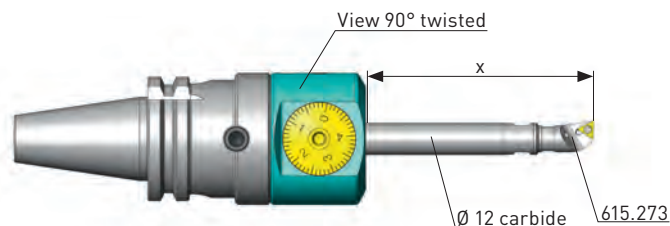

EWN 2-32, universal


Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 17.8 mm								optimized Ø 13.8 - 17.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	35	651.737	0.3	170	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14		
	45	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	220	0.2	0.8	0.08	0.14		
	60	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	200	0.2	0.8	0.08	0.12		
	75	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12		
	90	651.837	0.2	80	0.2	0.6	0.06	0.10	651.838	0.2	120	0.2	0.6	0.06	0.10		
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08		
	120	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08		
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	35	651.737	0.3	170	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14	
		45	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	220	0.2	0.8	0.08	0.14	
		60	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	200	0.2	0.8	0.08	0.12	
		75	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12	
		90	651.837	0.2	80	0.2	0.6	0.06	0.10	651.838	0.2	120	0.2	0.6	0.06	0.10	
105		651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08		
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	35	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12		
	45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	200	0.2	0.8	0.08	0.12		
	60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	180	0.2	0.8	0.08	0.10		
	75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10		
	90	651.837	0.2	80	0.2	0.6	0.06	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08		
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08		
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	35	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12		
	45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	200	0.2	0.8	0.08	0.12		
	60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	180	0.2	0.8	0.08	0.10		
	75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10		
	90	651.837	0.2	80	0.2	0.6	0.06	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08		
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08		
Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	35	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	200	0.2	0.8	0.08	0.12		
	45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	180	0.2	0.8	0.08	0.12		
	60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	160	0.2	0.8	0.08	0.10		
	75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	140	0.2	0.6	0.06	0.10		
	90	651.837	0.2	80	0.2	0.6	0.06	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08		
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08		
Gray cast iron GG 15 GG 20 GG 25 GG 30	35	651.735	0.3	170	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14		
	45	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	220	0.2	0.8	0.10	0.14		
	60	651.735	0.3	125	0.2	0.6	0.08	0.12	651.735	0.3	200	0.2	0.8	0.08	0.12		
	75	651.834	0.2	100	0.2	0.6	0.06	0.12	651.735	0.3	160	0.2	0.6	0.08	0.12		
	90	651.834	0.2	80	0.2	0.6	0.06	0.10	651.834	0.2	120	0.2	0.6	0.06	0.10		
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.834	0.2	70	0.2	0.4	0.06	0.08		
120	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08			

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories.



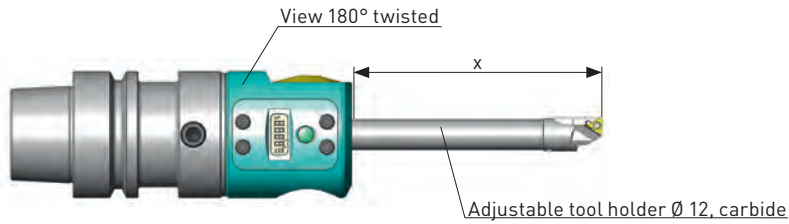


EWE 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 17.8 mm							optimized Ø 13.8 - 17.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	35	651.735	0.3	170	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14	
	45	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	220	0.2	0.8	0.10	0.14	
	60	651.735	0.3	125	0.2	0.6	0.08	0.12	651.735	0.3	200	0.2	0.8	0.08	0.12	
	75	651.834	0.2	100	0.2	0.6	0.06	0.12	651.735	0.3	160	0.2	0.6	0.08	0.12	
	90	651.834	0.2	80	0.2	0.6	0.06	0.10	651.834	0.2	120	0.2	0.6	0.06	0.10	
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.834	0.2	70	0.2	0.4	0.04	0.08	
	120	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	35	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12
		45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	200	0.2	0.8	0.08	0.12
		60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	180	0.2	0.8	0.08	0.10
		75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10
		90	651.837	0.2	80	0.2	0.6	0.06	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08
105		651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	70	0.2	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	35	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	380	0.2	0.8	0.10	0.16	
	45	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	340	0.2	0.8	0.10	0.16	
	60	651.723	0.3	180	0.2	0.8	0.08	0.14	651.723	0.3	280	0.2	0.8	0.08	0.14	
	75	651.825	0.2	150	0.2	0.6	0.06	0.14	651.723	0.3	240	0.2	0.8	0.08	0.14	
	90	651.825	0.2	110	0.2	0.6	0.06	0.12	651.825	0.2	190	0.2	0.6	0.06	0.12	
	105	651.823	0.1	80	0.2	0.4	0.04	0.12	651.825	0.2	110	0.2	0.6	0.06	0.12	
	120	651.823	0.1	40	0.2	0.4	0.04	0.10	651.823	0.1	50	0.2	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	35	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	380	0.2	0.8	0.08	0.16
		45	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	340	0.2	0.8	0.08	0.16
		60	651.737	0.3	180	0.2	0.8	0.08	0.14	651.737	0.3	280	0.2	0.8	0.08	0.14
		75	651.837	0.2	150	0.2	0.6	0.06	0.14	651.737	0.3	240	0.2	0.8	0.08	0.14
		90	651.837	0.2	110	0.2	0.6	0.06	0.12	651.837	0.2	190	0.2	0.6	0.06	0.12
105		651.824	0.1	80	0.2	0.4	0.04	0.10	651.837	0.2	110	0.2	0.6	0.06	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	35	651.737	0.3	120	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	45	651.737	0.3	120	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	60	651.837	0.2	100	0.2	0.6	0.06	0.12	651.837	0.2	120	0.2	0.6	0.06	0.12	
	75	651.837	0.2	90	0.2	0.6	0.06	0.12	651.837	0.2	100	0.2	0.6	0.06	0.12	
	90	651.824	0.1	80	0.2	0.4	0.04	0.10	651.824	0.1	80	0.2	0.4	0.04	0.10	
	105	651.824	0.1	60	0.2	0.4	0.04	0.08	651.824	0.1	60	0.2	0.4	0.04	0.08	
	120	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
	35	651.839	0.2	50	0.2	0.8	0.06	0.12	651.839	0.2	50	0.2	0.8	0.06	0.12	
	45	651.839	0.2	50	0.2	0.8	0.06	0.12	651.839	0.2	50	0.2	0.8	0.06	0.12	
	60	651.839	0.2	50	0.2	0.6	0.06	0.10	651.839	0.2	50	0.2	0.6	0.06	0.10	
	75	651.824	0.1	30	0.2	0.6	0.04	0.10	651.839	0.2	30	0.2	0.6	0.06	0.10	
	90	651.824	0.1	30	0.2	0.4	0.04	0.08	651.824	0.1	30	0.2	0.4	0.04	0.08	
105	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	25	0.2	0.4	0.04	0.08		

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 17.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

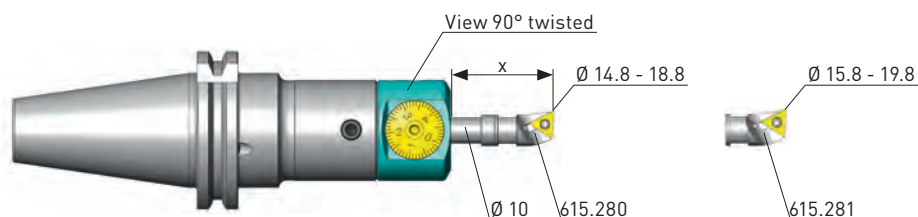


EWN 04-22, universal

Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 18.8 / 19.8mm								optimized Ø 14.8 - 16.8 / 17.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	25	655.318	0.4	150	0.2	0.6	0.10	0.18	655.385	0.4	180	0.2	0.6	0.10	0.18		
	35	655.318	0.4	120	0.2	0.6	0.10	0.16	655.385	0.4	150	0.2	0.6	0.10	0.16		
	40	655.319	0.2	90	0.2	0.6	0.06	0.10	655.375	0.2	100	0.2	0.6	0.06	0.10		
	45	655.319	0.2	60	0.2	0.6	0.06	0.10	655.375	0.2	60	0.2	0.6	0.06	0.10		
	25	655.318	0.4	150	0.2	0.6	0.10	0.18	655.385	0.4	180	0.2	0.6	0.10	0.18		
	35	655.318	0.4	120	0.2	0.6	0.10	0.16	655.385	0.4	150	0.2	0.6	0.10	0.16		
	40	655.319	0.2	90	0.2	0.6	0.06	0.10	655.375	0.2	100	0.2	0.6	0.06	0.10		
	45	655.319	0.2	60	0.2	0.6	0.06	0.10	655.375	0.2	60	0.2	0.6	0.06	0.10		
	25	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	170	0.2	0.6	0.10	0.16		
	35	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	140	0.2	0.6	0.10	0.14		
	40	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	45	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	25	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	170	0.2	0.6	0.10	0.16		
	35	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	140	0.2	0.6	0.10	0.14		
	40	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	45	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
	25	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	160	0.2	0.6	0.10	0.16		
	35	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	130	0.2	0.6	0.10	0.14		
	40	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	45	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
	K Gray cast iron GG 15 GG 20 GG 25 GG 30	25	655.380	0.4	150	0.2	0.6	0.10	0.18	655.380	0.4	180	0.2	0.6	0.10	0.18	
		35	655.380	0.4	120	0.2	0.6	0.10	0.16	655.380	0.4	150	0.2	0.6	0.10	0.16	
		40	655.370	0.2	90	0.2	0.6	0.06	0.10	655.370	0.2	100	0.2	0.6	0.06	0.10	
		45	655.370	0.2	60	0.2	0.6	0.06	0.10	655.370	0.2	60	0.2	0.6	0.06	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring head EWN 04-22. The tool holder is made out of steel. The max boring depth is limited to 45 mm. The insert holder 615.280 and 615.281 can be screwed on the same tool holder.

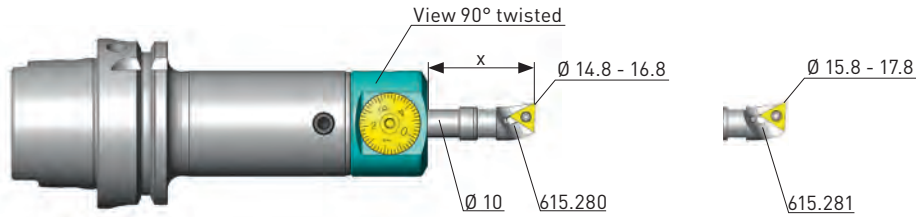


EWN 04-22, optimized

Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 18.8 / 19.8 mm							optimized Ø 14.8 - 16.8 / 17.8 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	25	655.380	0.4	150	0.2	0.6	0.10	0.18	655.380	0.4	180	0.2	0.6	0.10	0.18
	35	655.380	0.4	120	0.2	0.6	0.10	0.16	655.380	0.4	150	0.2	0.6	0.10	0.16
	40	655.370	0.2	90	0.2	0.6	0.06	0.10	655.370	0.2	100	0.2	0.6	0.06	0.10
	45	655.370	0.2	60	0.2	0.6	0.06	0.10	655.370	0.2	60	0.2	0.6	0.06	0.10
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	25	655.388	0.4	150	0.2	0.6	0.10	0.20	655.388	0.4	200	0.2	0.6	0.10	0.20
	35	655.388	0.4	120	0.2	0.6	0.10	0.18	655.388	0.4	170	0.2	0.6	0.10	0.18
	40	655.388	0.4	90	0.2	0.6	0.10	0.14	655.388	0.4	120	0.2	0.6	0.10	0.14
	45	655.378	0.2	60	0.2	0.6	0.06	0.10	655.378	0.2	70	0.2	0.6	0.06	0.10
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	25	655.318	0.4	150	0.2	0.6	0.10	0.20	655.318	0.4	200	0.2	0.6	0.10	0.20
	35	655.318	0.4	120	0.2	0.6	0.10	0.18	655.318	0.4	170	0.2	0.6	0.10	0.18
	40	655.318	0.4	90	0.2	0.6	0.10	0.14	655.318	0.4	120	0.2	0.6	0.10	0.14
	45	655.319	0.2	60	0.2	0.6	0.06	0.10	655.319	0.2	70	0.2	0.6	0.06	0.10
Titanium 3.7164	25	655.318	0.4	100	0.2	0.6	0.10	0.18	655.318	0.4	100	0.2	0.6	0.10	0.18
	35	655.318	0.4	80	0.2	0.6	0.10	0.16	655.318	0.4	80	0.2	0.6	0.10	0.16
	40	655.319	0.2	70	0.2	0.6	0.06	0.10	655.319	0.2	70	0.2	0.6	0.06	0.10
	45	655.319	0.2	50	0.2	0.6	0.06	0.10	655.319	0.2	50	0.2	0.6	0.06	0.10
Ni-basic-, Co-basic-, Alloys	25	655.326	0.4	30	0.2	0.6	0.10	0.16	655.326	0.4	30	0.2	0.6	0.10	0.16
	35	655.326	0.4	30	0.2	0.6	0.10	0.14	655.326	0.4	30	0.2	0.6	0.10	0.14
	40	655.316	0.2	25	0.2	0.6	0.06	0.10	655.316	0.2	25	0.2	0.6	0.06	0.10
	45	655.316	0.2	20	0.2	0.6	0.06	0.08	655.316	0.2	20	0.2	0.6	0.06	0.08

When applying the optimized cutting data, the following boring diameters may not be exceeded:

- with insert holder 615.280: Ø 16.8 mm
- with insert holder 615.281: Ø 17.8 mm

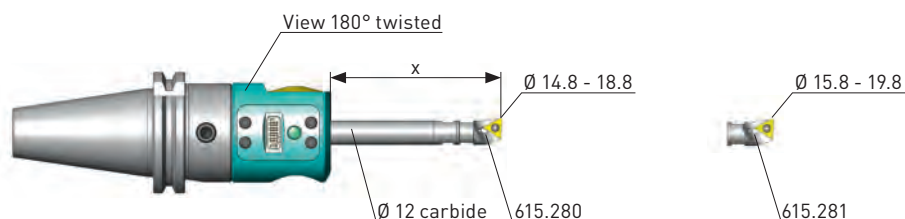


EWE 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 18.8 / 19.8 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	35	655.318	0.4	170	0.2	0.8	0.10	0.18	
	45	655.318	0.4	150	0.2	0.8	0.10	0.18	
	60	655.318	0.4	125	0.2	0.6	0.10	0.14	
	75	655.319	0.2	100	0.2	0.6	0.06	0.10	
	90	655.319	0.2	80	0.2	0.6	0.06	0.10	
	105	655.369	0.1	60	0.2	0.4	0.04	0.08	
	120	655.369	0.1	30	0.2	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	35	655.318	0.4	170	0.2	0.8	0.10	0.18
		45	655.318	0.4	150	0.2	0.8	0.10	0.18
		60	655.318	0.4	125	0.2	0.6	0.10	0.14
		75	655.319	0.2	100	0.2	0.6	0.06	0.10
		90	655.319	0.2	80	0.2	0.6	0.06	0.10
105		655.369	0.1	60	0.2	0.4	0.04	0.08	
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	35	655.318	0.4	170	0.2	0.8	0.10	0.16	
	45	655.318	0.4	150	0.2	0.8	0.10	0.16	
	60	655.318	0.4	125	0.2	0.6	0.10	0.14	
	75	655.319	0.2	100	0.2	0.6	0.06	0.10	
	90	655.319	0.2	80	0.2	0.6	0.06	0.10	
	105	655.369	0.1	60	0.2	0.4	0.04	0.08	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	35	655.318	0.4	170	0.2	0.8	0.10	0.16	
	45	655.318	0.4	150	0.2	0.8	0.10	0.16	
	60	655.318	0.4	125	0.2	0.6	0.10	0.14	
	75	655.319	0.2	100	0.2	0.6	0.06	0.10	
	90	655.319	0.2	80	0.2	0.6	0.06	0.10	
	105	655.369	0.1	60	0.2	0.4	0.04	0.08	
	120	655.369	0.1	30	0.2	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	35	655.318	0.4	170	0.2	0.8	0.10	0.16
		45	655.318	0.4	150	0.2	0.8	0.10	0.16
		60	655.318	0.4	125	0.2	0.6	0.10	0.14
		75	655.319	0.2	100	0.2	0.6	0.06	0.10
		90	655.319	0.2	80	0.2	0.6	0.06	0.10
105		655.369	0.1	60	0.2	0.4	0.04	0.08	
Gray cast iron GG 15 GG 20 GG 25 GG 30	35	655.380	0.4	170	0.2	0.8	0.10	0.18	
	45	655.380	0.4	150	0.2	0.8	0.10	0.18	
	60	655.380	0.4	125	0.2	0.6	0.10	0.14	
	75	655.370	0.2	100	0.2	0.6	0.06	0.10	
	90	655.370	0.2	80	0.2	0.6	0.06	0.10	
	105	655.363	0.1	60	0.2	0.4	0.04	0.08	
120	655.363	0.1	30	0.2	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.


The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories.

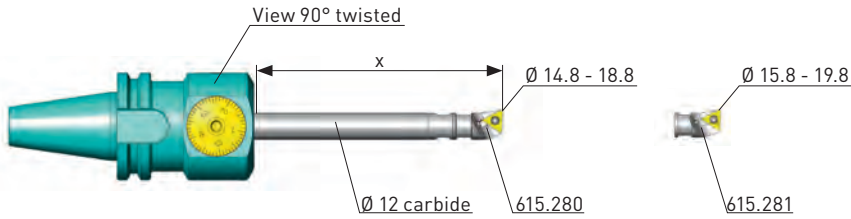

EWN 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 18.8 / 19.8 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	35	655.380	0.4	170	0.2	0.8	0.10	0.18	
	45	655.380	0.4	150	0.2	0.8	0.10	0.18	
	60	655.380	0.4	125	0.2	0.6	0.10	0.14	
	75	655.370	0.2	100	0.2	0.6	0.06	0.10	
	90	655.370	0.2	80	0.2	0.6	0.06	0.10	
	105	655.363	0.1	60	0.2	0.4	0.04	0.08	
	120	655.363	0.1	30	0.2	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	35	655.318	0.4	170	0.2	0.8	0.10	0.16
		45	655.318	0.4	150	0.2	0.8	0.10	0.16
		60	655.318	0.4	125	0.2	0.6	0.10	0.14
		75	655.319	0.2	100	0.2	0.6	0.06	0.10
		90	655.319	0.2	80	0.2	0.6	0.06	0.10
105		655.369	0.1	60	0.2	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	35	655.388	0.4	200	0.2	0.8	0.10	0.20	
	45	655.388	0.4	200	0.2	0.8	0.10	0.20	
	60	655.388	0.4	180	0.2	0.8	0.10	0.16	
	75	655.378	0.2	150	0.2	0.6	0.06	0.14	
	90	655.378	0.2	110	0.2	0.6	0.06	0.12	
	105	655.363	0.1	80	0.2	0.4	0.04	0.10	
	120	655.363	0.1	40	0.2	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	35	655.318	0.4	200	0.2	0.8	0.10	0.20
		45	655.318	0.4	200	0.2	0.8	0.10	0.20
		60	655.318	0.4	180	0.2	0.8	0.10	0.16
		75	655.319	0.2	150	0.2	0.6	0.06	0.14
		90	655.319	0.2	110	0.2	0.6	0.06	0.12
105		655.369	0.1	80	0.2	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	35	655.318	0.4	120	0.2	0.8	0.10	0.18	
	45	655.318	0.4	120	0.2	0.8	0.10	0.18	
	60	655.318	0.4	100	0.2	0.6	0.10	0.14	
	75	655.319	0.2	90	0.2	0.6	0.06	0.10	
	90	655.319	0.2	80	0.2	0.4	0.06	0.10	
	105	655.369	0.1	60	0.2	0.4	0.04	0.08	
	120	655.369	0.1	30	0.2	0.4	0.04	0.08	
	35	655.326	0.4	50	0.2	0.8	0.10	0.14	
	45	655.326	0.4	50	0.2	0.8	0.10	0.14	
	60	655.316	0.2	50	0.2	0.6	0.06	0.12	
	75	655.316	0.2	30	0.2	0.6	0.06	0.12	
	90	655.369	0.1	20	0.2	0.4	0.04	0.08	



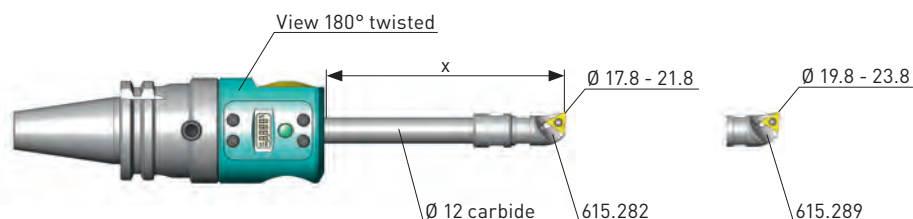


EWE 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 21.8 / 23.8 mm							optimized Ø 16.8 - 22.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18	
	50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18	
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14	
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18
		50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18
		65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14
		80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10
		95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10
110		655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125		655.369	0.1	30	0.2	0.4	0.04	0.08								
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16	
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16	
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14	
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
50		655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16	
65		655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14	
80		655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10	
95		655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10	
110		655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125		655.369	0.1	30	0.2	0.4	0.04	0.08								
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571		40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	220	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	200	0.2	0.8	0.10	0.16	
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	180	0.2	0.8	0.10	0.14	
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	150	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
K Gray cast iron GG 15 GG 20 GG 25 GG 30	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18	
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18	
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.8	0.10	0.14	
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10	
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.6	0.06	0.10	
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08	
125	655.363	0.1	30	0.2	0.4	0.04	0.08									

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories. The insert holder 615.282 and 615.289 can be screwed on the same tool holder.

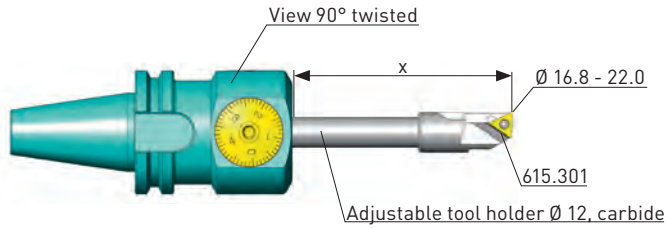


EWN 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 21.8 / 23.8 mm						optimized Ø 16.8 - 22.0 mm								
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18	
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18	
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.6	0.10	0.14	
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10	
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.4	0.06	0.10	
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08	
	125	655.363	0.1	30	0.2	0.4	0.04	0.08								
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
		50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
		65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14
		80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10
		95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
		110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08
		125	655.369	0.1	30	0.2	0.4	0.04	0.08							
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20	
	50	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20	
	65	655.388	0.4	180	0.2	0.8	0.10	0.16	655.388	0.4	300	0.2	0.8	0.10	0.16	
	80	655.378	0.2	150	0.2	0.6	0.06	0.14	655.388	0.4	260	0.2	0.8	0.10	0.14	
	95	655.378	0.2	110	0.2	0.6	0.06	0.12	655.378	0.2	190	0.2	0.6	0.06	0.12	
	110	655.363	0.1	80	0.2	0.4	0.04	0.10	655.363	0.1	110	0.2	0.6	0.04	0.10	
	125	655.363	0.1	40	0.2	0.4	0.04	0.10								
Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	40	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20	
	50	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20	
	65	655.318	0.4	180	0.2	0.8	0.10	0.16	655.318	0.4	300	0.2	0.8	0.10	0.16	
	80	655.319	0.2	150	0.2	0.6	0.06	0.14	655.318	0.4	260	0.2	0.8	0.10	0.14	
	95	655.319	0.2	110	0.2	0.6	0.06	0.12	655.319	0.2	190	0.2	0.6	0.06	0.12	
	110	655.369	0.1	80	0.2	0.4	0.04	0.10	655.369	0.1	110	0.2	0.6	0.04	0.10	
	125	655.369	0.1	40	0.2	0.4	0.04	0.10								
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	0.8	0.10	0.18	655.320	0.8	120	0.2	0.8	0.14	0.18	
	50	655.318	0.4	120	0.2	0.8	0.10	0.18	655.318	0.4	120	0.2	0.8	0.10	0.18	
	65	655.318	0.4	100	0.2	0.6	0.10	0.14	655.318	0.4	120	0.2	0.6	0.10	0.14	
	80	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.4	0.06	0.10	655.319	0.2	80	0.2	0.4	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	60	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	40	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14	
	50	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14	
	65	655.316	0.2	50	0.2	0.6	0.06	0.12	655.316	0.2	50	0.2	0.6	0.06	0.12	
	80	655.316	0.2	30	0.2	0.6	0.06	0.12	655.316	0.2	30	0.2	0.6	0.06	0.12	
	95	655.369	0.1	20	0.2	0.4	0.04	0.08	655.369	0.1	25	0.2	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 22.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

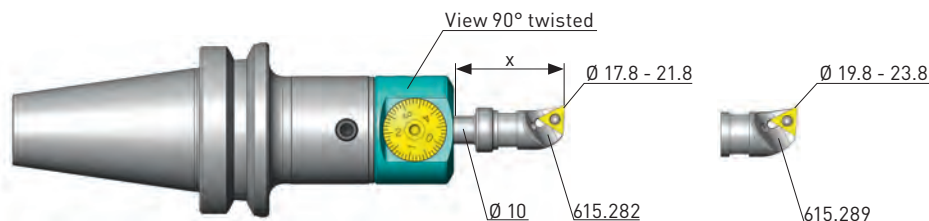


EWN 04-22, universal

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 21.8 / 23.8 mm								optimized Ø 17.8 - 19.8 / 21.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	30	655.318	0.4	150	0.2	0.6	0.10	0.18	655.385	0.4	180	0.2	0.6	0.10	0.18		
	40	655.318	0.4	120	0.2	0.6	0.10	0.16	655.385	0.4	150	0.2	0.6	0.10	0.16		
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.375	0.2	100	0.2	0.6	0.06	0.10		
	50	655.319	0.2	60	0.2	0.6	0.06	0.10	655.375	0.2	60	0.2	0.6	0.06	0.10		
	30	655.318	0.4	150	0.2	0.6	0.10	0.18	655.385	0.4	180	0.2	0.6	0.10	0.18		
	40	655.318	0.4	120	0.2	0.6	0.10	0.16	655.385	0.4	150	0.2	0.6	0.10	0.16		
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.375	0.2	100	0.2	0.6	0.06	0.10		
	50	655.319	0.2	60	0.2	0.6	0.06	0.10	655.375	0.2	60	0.2	0.6	0.06	0.10		
	30	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	170	0.2	0.6	0.10	0.16		
	40	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	140	0.2	0.6	0.10	0.14		
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	50	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	30	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	170	0.2	0.6	0.10	0.16		
	40	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	140	0.2	0.6	0.10	0.14		
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	50	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
	30	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	160	0.2	0.6	0.10	0.16		
	40	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	130	0.2	0.6	0.10	0.14		
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10		
	50	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08		
	30	655.380	0.4	150	0.2	0.6	0.10	0.18	655.380	0.4	180	0.2	0.6	0.10	0.18		
	40	655.380	0.4	120	0.2	0.6	0.10	0.16	655.380	0.4	150	0.2	0.6	0.10	0.16		
	45	655.370	0.2	90	0.2	0.6	0.06	0.10	655.370	0.2	100	0.2	0.6	0.06	0.10		
	50	655.370	0.2	60	0.2	0.6	0.06	0.10	655.370	0.2	60	0.2	0.6	0.06	0.10		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring head EWN 04-22. The tool holder is made out of steel. The max boring depth is limited to 50 mm. The insert holder 615.282 and 615.289 can be screwed on the same tool holder.

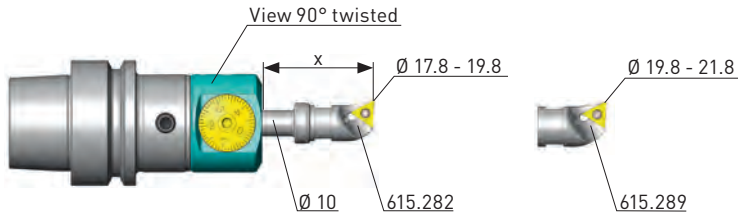


EWN 04-22, optimized

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 21.8 / 23.8 mm							optimized Ø 17.8 - 19.8 / 21.8 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	30	655.380	0.4	150	0.2	0.6	0.10	0.18	655.380	0.4	180	0.2	0.6	0.10	0.18
	40	655.380	0.4	120	0.2	0.6	0.10	0.16	655.380	0.4	150	0.2	0.6	0.10	0.16
	45	655.370	0.2	90	0.2	0.6	0.06	0.10	655.370	0.2	100	0.2	0.6	0.06	0.10
	50	655.370	0.2	60	0.2	0.6	0.06	0.10	655.370	0.2	60	0.2	0.6	0.06	0.10
K GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	30	655.318	0.4	150	0.2	0.6	0.10	0.16	655.318	0.4	170	0.2	0.6	0.10	0.16
	40	655.318	0.4	120	0.2	0.6	0.10	0.14	655.318	0.4	140	0.2	0.6	0.10	0.14
	45	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10
	50	655.319	0.2	60	0.2	0.6	0.06	0.08	655.319	0.2	60	0.2	0.6	0.06	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	30	655.388	0.4	150	0.2	0.6	0.10	0.20	655.388	0.4	200	0.2	0.6	0.10	0.20
	40	655.388	0.4	120	0.2	0.6	0.10	0.18	655.388	0.4	170	0.2	0.6	0.10	0.18
	45	655.388	0.4	90	0.2	0.6	0.10	0.14	655.388	0.4	120	0.2	0.6	0.10	0.14
	50	655.378	0.2	60	0.2	0.6	0.06	0.10	655.378	0.2	70	0.2	0.6	0.06	0.10
N Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	30	655.318	0.4	150	0.2	0.6	0.10	0.20	655.318	0.4	200	0.2	0.6	0.10	0.20
	40	655.318	0.4	120	0.2	0.6	0.10	0.18	655.318	0.4	170	0.2	0.6	0.10	0.18
	45	655.318	0.4	90	0.2	0.6	0.10	0.14	655.318	0.4	120	0.2	0.6	0.10	0.14
	50	655.319	0.2	60	0.2	0.6	0.06	0.10	655.319	0.2	70	0.2	0.6	0.06	0.10
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	30	655.318	0.4	100	0.2	0.6	0.10	0.18	655.318	0.4	100	0.2	0.6	0.10	0.18
	40	655.318	0.4	80	0.2	0.6	0.10	0.16	655.318	0.4	80	0.2	0.6	0.10	0.16
	45	655.319	0.2	70	0.2	0.6	0.06	0.10	655.319	0.2	70	0.2	0.6	0.06	0.10
	50	655.319	0.2	50	0.2	0.6	0.06	0.10	655.319	0.2	50	0.2	0.6	0.06	0.10

When applying the optimized cutting data, the following boring diameters may not be exceeded:

- with insert holder 615.282: Ø 19.8 mm
- with insert holder 615.289: Ø 21.8 mm

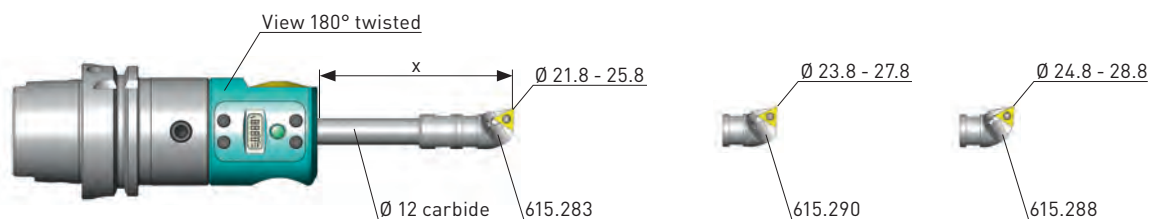

EWE 2-32, universal


Workpiece material	Boring depth X [mm]	universal Ø 21.8 - 25.8 / 27.8 / 28.8 mm							optimized Ø 21.8 - 27.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18	
	50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18	
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14	
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18
		50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18
		65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14
		80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10
		95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10
110		655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16	
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16	
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14	
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
50		655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16	
65		655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14	
80		655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10	
95		655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10	
110		655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125		655.369	0.1	30	0.2	0.4	0.04	0.08								
Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571		40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	220	0.2	0.8	0.14	0.16
		50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	200	0.2	0.8	0.10	0.16
		65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	180	0.2	0.8	0.10	0.14
		80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	150	0.2	0.6	0.06	0.10
		95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
Gray cast iron GG 15 GG 20 GG 25 GG 30	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18	
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18	
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.8	0.10	0.14	
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10	
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.6	0.06	0.10	
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08	
125	655.363	0.1	30	0.2	0.4	0.04	0.08									

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories. The insert holder 615.283, 615.290 and 615.288 can be screwed on the same tool holder.



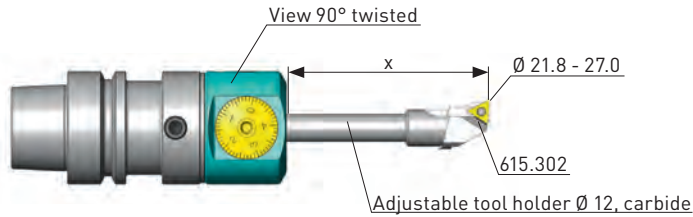


EWN 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 21.8 - 25.8 / 27.8 / 28.8 mm							optimized Ø 21.8 - 27.0 mm						
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.6	0.10	0.14
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.4	0.06	0.10
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08
	125	655.363	0.1	30	0.2	0.4	0.04	0.08							
	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125	655.369	0.1	30	0.2	0.4	0.04	0.08								
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20
	50	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20
	65	655.388	0.4	180	0.2	0.8	0.10	0.16	655.388	0.4	300	0.2	0.8	0.10	0.16
	80	655.378	0.2	150	0.2	0.6	0.06	0.14	655.388	0.4	260	0.2	0.8	0.10	0.14
	95	655.378	0.2	110	0.2	0.6	0.06	0.12	655.378	0.2	190	0.2	0.6	0.06	0.12
	110	655.363	0.1	80	0.2	0.4	0.04	0.10	655.363	0.1	110	0.2	0.6	0.04	0.10
	125	655.363	0.1	40	0.2	0.4	0.04	0.10							
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20
	50	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20
	65	655.318	0.4	180	0.2	0.8	0.10	0.16	655.318	0.4	300	0.2	0.8	0.10	0.16
	80	655.319	0.2	150	0.2	0.6	0.06	0.14	655.318	0.4	260	0.2	0.8	0.10	0.14
	95	655.319	0.2	110	0.2	0.6	0.06	0.12	655.319	0.2	190	0.2	0.6	0.06	0.12
	110	655.369	0.1	80	0.2	0.4	0.04	0.10	655.369	0.1	110	0.2	0.6	0.04	0.10
	125	655.369	0.1	40	0.2	0.4	0.04	0.10							
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	0.8	0.10	0.18	655.320	0.8	120	0.2	0.8	0.14	0.18
	50	655.318	0.4	120	0.2	0.8	0.10	0.18	655.318	0.4	120	0.2	0.8	0.10	0.18
	65	655.318	0.4	100	0.2	0.6	0.10	0.14	655.318	0.4	120	0.2	0.6	0.10	0.14
	80	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.4	0.06	0.10	655.319	0.2	80	0.2	0.4	0.06	0.10
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	60	0.2	0.4	0.04	0.08
	125	655.369	0.1	30	0.2	0.4	0.04	0.08							
	40	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14
	50	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14
	65	655.316	0.2	50	0.2	0.6	0.06	0.12	655.316	0.2	50	0.2	0.6	0.06	0.12
	80	655.316	0.2	30	0.2	0.6	0.06	0.12	655.316	0.2	30	0.2	0.6	0.06	0.12
	95	655.369	0.1	20	0.2	0.4	0.04	0.08	655.369	0.1	25	0.2	0.4	0.04	0.08

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 27.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended

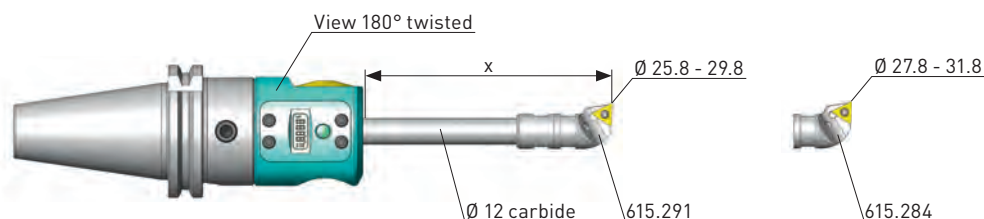


EWE 2-32, universal

Workpiece material	Boring depth X [mm]	universal Ø 25.8 - 29.8 / 31.8 mm							optimized Ø 26.8 - 33.0 mm						
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18
	50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08
	125	655.369	0.1	30	0.2	0.4	0.04	0.08							
	40	655.318	0.4	170	0.2	0.8	0.10	0.18	655.395	0.8	260	0.2	0.8	0.14	0.18
	50	655.318	0.4	150	0.2	0.8	0.10	0.18	655.385	0.4	240	0.2	0.8	0.10	0.18
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.385	0.4	200	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	160	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.375	0.2	120	0.2	0.6	0.06	0.10
110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125	655.369	0.1	30	0.2	0.4	0.04	0.08								
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08
	125	655.369	0.1	30	0.2	0.4	0.04	0.08							
	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	180	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	150	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125	655.369	0.1	30	0.2	0.4	0.04	0.08								
K Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08
	125	655.369	0.1	30	0.2	0.4	0.04	0.08							
	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
	50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
	65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	180	0.2	0.8	0.10	0.14
	80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	150	0.2	0.6	0.06	0.10
	95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
125	655.369	0.1	30	0.2	0.4	0.04	0.08								
K Gray cast iron GG 15 GG 20 GG 25 GG 30	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.8	0.10	0.14
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.6	0.06	0.10
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08
125	655.363	0.1	30	0.2	0.4	0.04	0.08								

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The cutting data are valid for the fine boring heads EWN/EWE 2-32 and the corresponding accessories. The insert holder 615.291 and 615.284 can be screwed on the same tool holder.

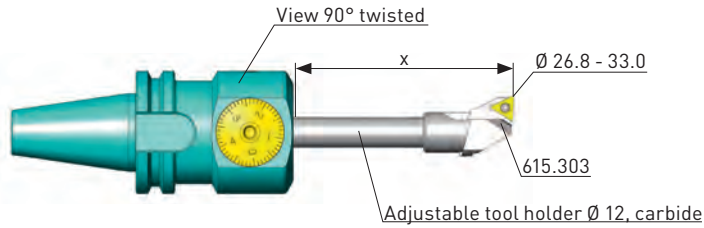

EWN 2-32, optimized

Workpiece material	Boring depth X [mm]	universal Ø 25.8 - 29.8 / 31.8 mm						optimized Ø 26.8 - 33.0 mm								
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	170	0.2	0.8	0.10	0.18	655.390	0.8	260	0.2	0.8	0.14	0.18	
	50	655.380	0.4	150	0.2	0.8	0.10	0.18	655.380	0.4	240	0.2	0.8	0.10	0.18	
	65	655.380	0.4	125	0.2	0.6	0.10	0.14	655.380	0.4	200	0.2	0.6	0.10	0.14	
	80	655.370	0.2	100	0.2	0.6	0.06	0.10	655.370	0.2	160	0.2	0.6	0.06	0.10	
	95	655.370	0.2	80	0.2	0.6	0.06	0.10	655.370	0.2	120	0.2	0.4	0.06	0.10	
	110	655.363	0.1	60	0.2	0.4	0.04	0.08	655.363	0.1	70	0.2	0.4	0.04	0.08	
	125	655.363	0.1	30	0.2	0.4	0.04	0.08								
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	170	0.2	0.8	0.10	0.16	655.320	0.8	240	0.2	0.8	0.14	0.16
		50	655.318	0.4	150	0.2	0.8	0.10	0.16	655.318	0.4	220	0.2	0.8	0.10	0.16
		65	655.318	0.4	125	0.2	0.6	0.10	0.14	655.318	0.4	190	0.2	0.8	0.10	0.14
		80	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	160	0.2	0.6	0.06	0.10
		95	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.10
110		655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	70	0.2	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20	
	50	655.388	0.4	200	0.2	0.8	0.10	0.20	655.398	0.8	420	0.2	0.8	0.14	0.20	
	65	655.388	0.4	180	0.2	0.8	0.10	0.16	655.388	0.4	300	0.2	0.8	0.10	0.16	
	80	655.378	0.2	150	0.2	0.6	0.06	0.14	655.388	0.4	260	0.2	0.8	0.10	0.14	
	95	655.378	0.2	110	0.2	0.6	0.06	0.12	655.378	0.2	190	0.2	0.6	0.06	0.12	
	110	655.363	0.1	80	0.2	0.4	0.04	0.10	655.363	0.1	110	0.2	0.6	0.04	0.10	
	125	655.363	0.1	40	0.2	0.4	0.04	0.10								
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20
		50	655.318	0.4	200	0.2	0.8	0.10	0.20	655.320	0.8	420	0.2	0.8	0.14	0.20
		65	655.318	0.4	180	0.2	0.8	0.10	0.16	655.318	0.4	300	0.2	0.8	0.10	0.16
		80	655.319	0.2	150	0.2	0.6	0.06	0.14	655.318	0.4	260	0.2	0.8	0.10	0.14
		95	655.319	0.2	110	0.2	0.6	0.06	0.12	655.319	0.2	190	0.2	0.6	0.06	0.12
110		655.369	0.1	80	0.2	0.4	0.04	0.10	655.369	0.1	110	0.2	0.6	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	0.8	0.10	0.18	655.320	0.8	120	0.2	0.8	0.14	0.18	
	50	655.318	0.4	120	0.2	0.8	0.10	0.18	655.318	0.4	120	0.2	0.8	0.10	0.18	
	65	655.318	0.4	100	0.2	0.6	0.10	0.14	655.318	0.4	120	0.2	0.6	0.10	0.14	
	80	655.319	0.2	90	0.2	0.6	0.06	0.10	655.319	0.2	100	0.2	0.6	0.06	0.10	
	95	655.319	0.2	80	0.2	0.4	0.06	0.10	655.319	0.2	80	0.2	0.4	0.06	0.10	
	110	655.369	0.1	60	0.2	0.4	0.04	0.08	655.369	0.1	60	0.2	0.4	0.04	0.08	
	125	655.369	0.1	30	0.2	0.4	0.04	0.08								
	40	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14	
	50	655.326	0.4	50	0.2	0.8	0.10	0.14	655.326	0.4	50	0.2	0.8	0.10	0.14	
	65	655.316	0.2	50	0.2	0.6	0.06	0.12	655.316	0.2	50	0.2	0.6	0.06	0.12	
	80	655.316	0.2	30	0.2	0.6	0.06	0.12	655.316	0.2	30	0.2	0.6	0.06	0.12	
	95	655.369	0.1	20	0.2	0.4	0.04	0.08	655.369	0.1	25	0.2	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 33.0 mm may not be exceeded
- the use of a fine balanced tool shank or of the EWN 2-32 integral is recommended










The cutting data are valid for the fine boring heads EWN 2-152 and EWE 2-152 and are applicable when tool holders and boring cutters made of carbide are used. The different diameter ranges are in line with the existing accessories. On a double page, there are cutting data for one specific diameter range. The columns "universal" and "optimized" differ in terms of cutting data and inserts. The cutting data in the column „optimized" are applicable when the best possible accessories for each diameter range are used. This includes the use of adjustable tool holders for diameter 9.8 mm and bigger. The optimized accessories are clamped in the centre, or close to the centre position. Therefore the imbalance is minimized which permits higher cutting speeds. The listed inserts reflect the best possible choice under consideration of workpiece material and boring depth.

In the column "universal", the cutting data are lower and the choice of inserts is reduced. The lower data permit a bigger applicable boring range (starting diameter + 5 mm). These data are recommended for single piece production.

**Important:** The cutting data must in any case be adapted to the working conditions.


**Application advices for adjustable tool holders (EWN 2-152/EWE 2-152, boring range Ø 9.8 – 54 mm, optimized)**

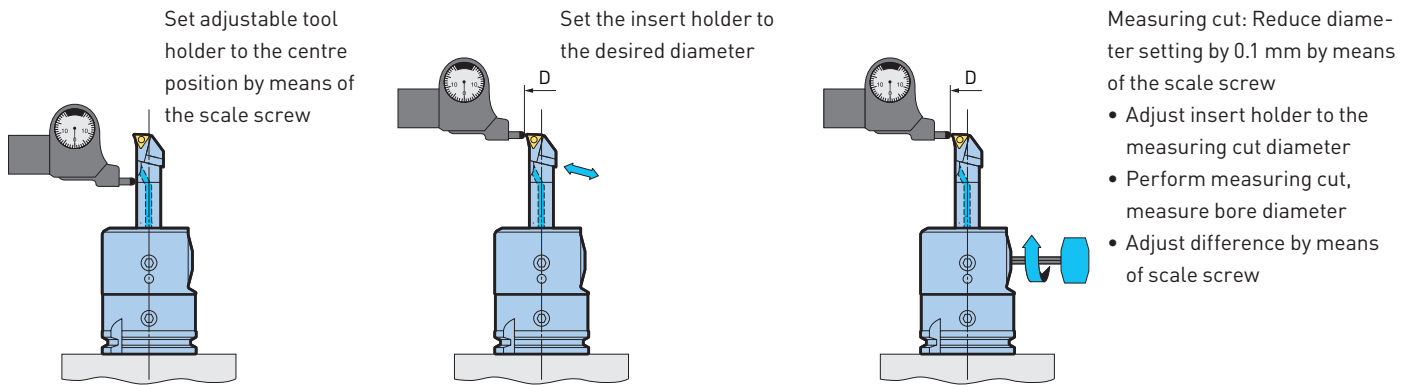


**Extended boring range**

With special accessories, the boring range of the EWN/EWE 2-152 to Ø 152 mm can be extended. The cutting data are listed on page 134-137.

**EWN 2-152/EWE 2-152**

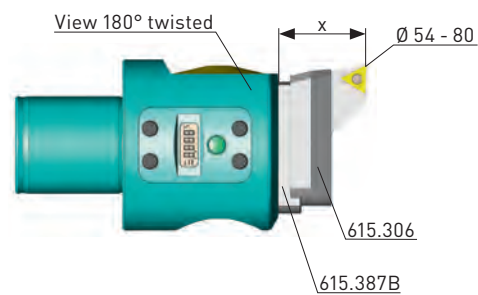

**EWN 2-152/EWE 2-152**

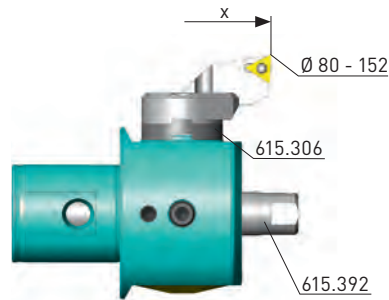


**In the table the following terms and dimensions are used:**

Workpiece material:	Material no. according to DIN or generally used designation	
Boring depth X:	Projection of the tool holder	(mm)
Insert:	Detailed information about the inserts is shown in the BIG KAISER main catalogue.	
R:	Nose radius of boring cutter/insert	(mm)
Vc:	Cutting speed	(m/min)
Stock allow.:	Stock allowance per cut in Ø	(mm)
fn:	Feed per revolution	(mm/U)
Ra:	Surface quality (Ra 1.6 µm for N7)	

**Balanceable fine boring head EWB 2-50**

There are special cutting data and adjustment tables for the balanceable fine boring head EWB 2-50. These data tables are delivered with the tool.

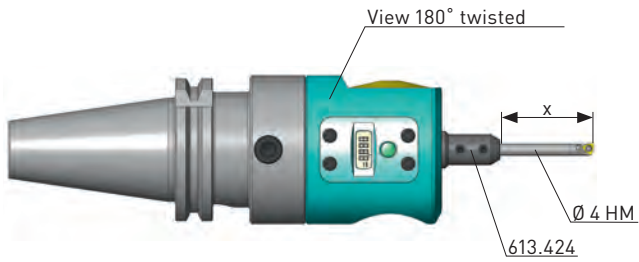


Workpiece material		Ø 2.0-3.0 mm					
		Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
		X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P	Steel	9	611.155	0.2	60	0.1	0.008
M	Stainless steels	9	611.155	0.2	60	0.1	0.008
K	Cast iron	9	611.155	0.2	60	0.1	0.008
N	Aluminium	9	611.155	0.2	60	0.1	0.008
	Non-ferrous metals	9	611.155	0.2	60	0.1	0.008
S	Titanium	9	611.155	0.2	40	0.1	0.008

Workpiece material		Ø 3.0-3.9 mm					
		Boring depth	Carbide boring bars		Vc (max)*	Allow.	Feed
		X [mm]	Order No.	R	m/min	mm/Ø	mm/U
P	Steel	14	611.156	0.2	90	0.1	0.008
M	Stainless steels	14	611.156	0.2	90	0.1	0.008
K	Cast iron	14	611.156	0.2	90	0.1	0.008
N	Aluminium	14	611.156	0.2	90	0.1	0.008
	Non-ferrous metals	14	611.156	0.2	90	0.1	0.008
S	Titanium	14	611.156	0.2	50	0.1	0.008

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

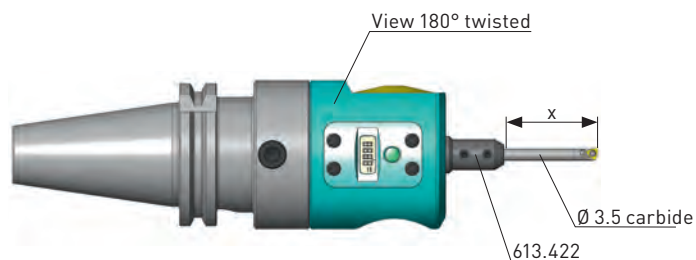

Workpiece material	Boring depth X [mm]	universal Ø 3.9 - 5.8 mm							optimized Ø 3.9 - 4.9 mm						
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715  Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752  Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08
	15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06
	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08
	15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06
	10	615.203A	0.1	80	0.1	0.3	0.04	0.08	615.203A	0.1	90	0.1	0.3	0.04	0.08
	15	615.203A	0.1	65	0.1	0.3	0.04	0.08	615.203A	0.1	70	0.1	0.3	0.04	0.08
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762  Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	615.203A	0.1	80	0.1	0.3	0.04	0.08	615.203A	0.1	90	0.1	0.3	0.04	0.08
	15	615.203A	0.1	65	0.1	0.3	0.04	0.08	615.203A	0.1	70	0.1	0.3	0.04	0.08
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06
	10	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08
	15	615.203A	0.1	60	0.1	0.3	0.04	0.08	615.203A	0.1	65	0.1	0.3	0.04	0.08
	20	615.203A	0.1	45	0.1	0.2	0.04	0.06	615.203A	0.1	50	0.1	0.2	0.04	0.06
	25	615.203A	0.1	30	0.1	0.2	0.04	0.06	615.203A	0.1	35	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	25	0.1	0.2	0.04	0.06
K Gray cast iron GG 15 GG 20 GG 25 GG 30	10	615.203A	0.1	90	0.1	0.3	0.04	0.08	615.203A	0.1	100	0.1	0.3	0.04	0.08
	15	615.203A	0.1	70	0.1	0.3	0.04	0.08	615.203A	0.1	80	0.1	0.3	0.04	0.08
	20	615.203A	0.1	50	0.1	0.2	0.04	0.06	615.203A	0.1	55	0.1	0.2	0.04	0.06
	25	615.203A	0.1	35	0.1	0.2	0.04	0.06	615.203A	0.1	40	0.1	0.2	0.04	0.06
	30	615.203A	0.1	25	0.1	0.2	0.04	0.06	615.203A	0.1	30	0.1	0.2	0.04	0.06

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

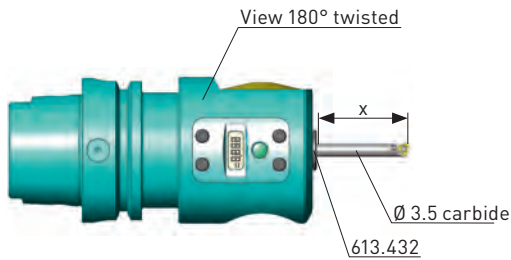

Workpiece material	Boring depth X [mm]	universal Ø 3.9 - 5.8 mm							optimized Ø 3.9 - 4.9 mm						
		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U		Boring cutter		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	615.203A	0.1	90	0.10	0.3	0.04	0.08	615.203A	0.1	100	0.10	0.3	0.04	0.08
	15	615.203A	0.1	70	0.10	0.3	0.04	0.08	615.203A	0.1	80	0.10	0.3	0.04	0.08
	20	615.203A	0.1	50	0.10	0.2	0.04	0.06	615.203A	0.1	55	0.10	0.2	0.04	0.06
	25	615.203A	0.1	35	0.10	0.2	0.04	0.06	615.203A	0.1	40	0.10	0.2	0.04	0.06
	30	615.203A	0.1	25	0.10	0.2	0.04	0.06	615.203A	0.1	30	0.10	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	615.203	0.1	100	0.10	0.3	0.04	0.08	615.203	0.1	120	0.10	0.3	0.04	0.08
	15	615.203	0.1	85	0.10	0.3	0.04	0.08	615.203	0.1	100	0.10	0.3	0.04	0.08
	20	615.203	0.1	60	0.10	0.2	0.04	0.06	615.203	0.1	75	0.10	0.2	0.04	0.06
	25	615.203	0.1	40	0.10	0.2	0.04	0.06	615.203	0.1	55	0.10	0.2	0.04	0.06
	30	615.203	0.1	30	0.10	0.2	0.04	0.06	615.203	0.1	35	0.10	0.2	0.04	0.06
	35	615.203	0.1	20	0.10	0.2	0.04	0.06	615.203	0.1	25	0.10	0.2	0.04	0.06
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	10	615.203A	0.1	100	0.10	0.3	0.04	0.08	615.203A	0.1	120	0.10	0.3	0.04	0.08
	15	615.203A	0.1	85	0.10	0.3	0.04	0.08	615.203A	0.1	100	0.10	0.3	0.04	0.08
	20	615.203A	0.1	60	0.10	0.2	0.04	0.06	615.203A	0.1	75	0.10	0.2	0.04	0.06
	25	615.203A	0.1	40	0.10	0.2	0.04	0.06	615.203A	0.1	55	0.10	0.2	0.04	0.06
	30	615.203A	0.1	30	0.10	0.2	0.04	0.06	615.203A	0.1	35	0.10	0.2	0.04	0.06
	35	615.203A	0.1	20	0.10	0.2	0.04	0.06	615.203A	0.1	25	0.10	0.2	0.04	0.06
Titanium 3.7164	10	615.203A	0.1	90	0.10	0.3	0.04	0.08	615.203A	0.1	90	0.10	0.3	0.04	0.08
	15	615.203A	0.1	70	0.10	0.3	0.04	0.08	615.203A	0.1	70	0.10	0.3	0.04	0.08
	20	615.203A	0.1	50	0.10	0.2	0.04	0.06	615.203A	0.1	50	0.10	0.2	0.04	0.06
	25	615.203A	0.1	35	0.10	0.2	0.04	0.06	615.203A	0.1	35	0.10	0.2	0.04	0.06
	30	615.203A	0.1	25	0.10	0.2	0.04	0.06	615.203A	0.1	25	0.10	0.2	0.04	0.06
Ni-basic-, Co-basic-, Alloys	10	615.203A	0.1	40	0.05	0.1	0.04	0.06	615.203A	0.1	40	0.05	0.1	0.04	0.06
	15	615.203A	0.1	30	0.05	0.1	0.04	0.06	615.203A	0.1	30	0.05	0.1	0.04	0.06
	20	615.203A	0.1	30	0.05	0.1	0.04	0.06	615.203A	0.1	30	0.05	0.1	0.04	0.06

#### When applying the optimized cutting data:

- the boring diameter of 7.3 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

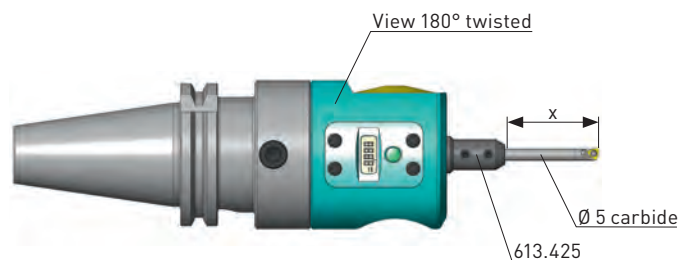


Workpiece material	Boring depth X [mm]	universal Ø 5.8 - 10.8 mm								optimized Ø 5.8 - 7.3 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715  Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752  Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10		
	20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10		
	30	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	90	0.1	0.3	0.06	0.07		
	40	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07		
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07		
	60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07		
	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10		
	20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10		
	30	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	90	0.1	0.3	0.06	0.07		
	40	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07		
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07		
	60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07		
	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08		
	20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08		
	30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06		
	40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06		
	50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06		
	60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06		
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762  Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08		
	20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08		
	30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06		
	40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06		
	50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06		
	60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06		
	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	110	0.1	0.3	0.06	0.08		
	20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	90	0.1	0.3	0.06	0.08		
	30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	70	0.1	0.3	0.06	0.06		
	40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06		
	50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06		
	60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06		
K Gray cast iron GG15 GG 20 GG 25 GG 30	10	655.603	0.2	100	0.1	0.4	0.06	0.10	655.603	0.2	150	0.1	0.4	0.06	0.10		
	20	655.603	0.2	80	0.1	0.4	0.06	0.10	655.603	0.2	120	0.1	0.4	0.06	0.10		
	30	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	90	0.1	0.4	0.06	0.07		
	40	655.605	0.1	60	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07		
	50	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07		
	60	655.605	0.1	25	0.1	0.2	0.04	0.07	655.605	0.1	30	0.1	0.2	0.04	0.07		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.




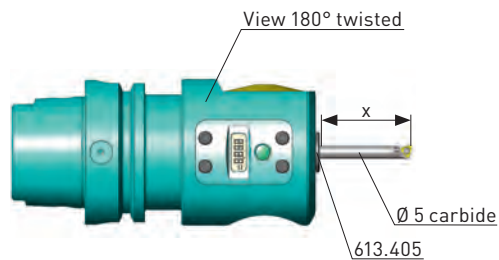

Workpiece material	Boring depth X [mm]	universal Ø 5.8 - 10.8 mm							optimized Ø 5.8 - 7.3 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	655.603	0.2	100	0.1	0.3	0.06	0.10	655.603	0.2	150	0.1	0.3	0.06	0.10	
	20	655.603	0.2	80	0.1	0.3	0.06	0.10	655.603	0.2	120	0.1	0.3	0.06	0.10	
	30	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	90	0.1	0.3	0.06	0.07	
	40	655.605	0.1	60	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	50	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	60	655.605	0.1	25	0.1	0.2	0.04	0.07	655.605	0.1	30	0.1	0.2	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	10	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
	20	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
	30	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
	40	655.606	0.1	55	0.1	0.2	0.04	0.06	655.606	0.1	60	0.1	0.2	0.04	0.06	
	50	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
	60	655.606	0.1	25	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	655.601	0.2	120	0.1	0.3	0.06	0.12	655.601	0.2	180	0.1	0.3	0.06	0.12	
	20	655.601	0.2	120	0.1	0.3	0.06	0.12	655.601	0.2	150	0.1	0.3	0.06	0.12	
	30	655.601	0.2	100	0.1	0.3	0.06	0.11	655.601	0.2	120	0.1	0.3	0.06	0.11	
	40	655.604	0.1	80	0.1	0.2	0.04	0.08	655.601	0.2	100	0.1	0.3	0.06	0.08	
	50	655.604	0.1	60	0.1	0.2	0.04	0.08	655.604	0.1	80	0.1	0.2	0.04	0.08	
	60	655.604	0.1	40	0.1	0.2	0.04	0.08	655.604	0.1	50	0.1	0.2	0.04	0.08	
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	10	655.602	0.2	120	0.1	0.3	0.06	0.12	655.602	0.2	180	0.1	0.3	0.06	0.12
20	655.602	0.2	120	0.1	0.3	0.06	0.12	655.602	0.2	150	0.1	0.3	0.06	0.12		
30	655.602	0.2	100	0.1	0.3	0.06	0.11	655.602	0.2	120	0.1	0.3	0.06	0.11		
40	655.606	0.1	80	0.1	0.2	0.04	0.08	655.602	0.2	100	0.1	0.2	0.06	0.08		
50	655.606	0.1	60	0.1	0.2	0.04	0.08	655.606	0.1	80	0.1	0.2	0.04	0.08		
60	655.606	0.1	40	0.1	0.2	0.04	0.08	655.606	0.1	50	0.1	0.2	0.04	0.08		
S Titanium 3.7164	10	655.602	0.2	90	0.1	0.3	0.06	0.10	655.602	0.2	100	0.1	0.3	0.06	0.10	
	20	655.602	0.2	70	0.1	0.3	0.06	0.10	655.602	0.2	80	0.1	0.3	0.06	0.10	
	30	655.606	0.1	60	0.1	0.2	0.04	0.07	655.602	0.2	70	0.1	0.3	0.06	0.07	
	40	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	60	0.1	0.2	0.04	0.07	
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	60	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07	
	Ni-basic-, Co-basic-, Alloys	10	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
	20	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08	
	30	655.606	0.1	30	0.1	0.2	0.04	0.06	655.602	0.2	30	0.1	0.2	0.06	0.06	
	40	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06	
50	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06		

#### When applying the optimized cutting data:


- the boring diameter of 7.3 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

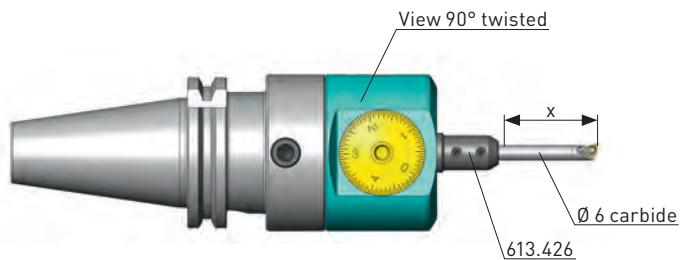

Workpiece material	Boring depth X [mm]	universal Ø 7.3 - 12.3 mm							optimized Ø 7.3 - 7.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	10	655.602	0.2	120	0.1	0.3	0.06	0.10	655.602	0.2	180	0.1	0.3	0.06	0.10	
	20	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	140	0.1	0.3	0.06	0.10	
	30	655.602	0.2	80	0.1	0.3	0.06	0.09	655.602	0.2	100	0.1	0.3	0.06	0.09	
	40	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	80	0.1	0.3	0.06	0.07	
	50	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07	
	60	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	65	655.606	0.1	30	0.1	0.2	0.04	0.07	655.606	0.1	35	0.1	0.2	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	10	655.602	0.2	120	0.1	0.3	0.06	0.10	655.602	0.2	180	0.1	0.3	0.06	0.10
		20	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	140	0.1	0.3	0.06	0.10
		30	655.602	0.2	80	0.1	0.3	0.06	0.09	655.602	0.2	100	0.1	0.3	0.06	0.09
		40	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	80	0.1	0.3	0.06	0.07
		50	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07
		60	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07
	Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08
20		655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08	
30		655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
40		655.606	0.1	70	0.1	0.2	0.04	0.06	655.606	0.1	80	0.1	0.3	0.04	0.06	
50		655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06	
60		655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
65		655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08	
	20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08	
	30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08	
	40	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
	50	655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06	
	60	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
	65	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	110	0.1	0.3	0.06	0.08
		30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	90	0.1	0.3	0.06	0.08
40		655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06	
50		655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06	
60		655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06	
65		655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06	
Gray cast iron GG15 GG 20 GG 25 GG 30	10	655.603	0.2	120	0.1	0.4	0.06	0.10	655.603	0.2	180	0.1	0.4	0.06	0.10	
	20	655.603	0.2	100	0.1	0.4	0.06	0.10	655.603	0.2	140	0.1	0.4	0.06	0.10	
	30	655.603	0.2	80	0.1	0.4	0.06	0.10	655.603	0.2	100	0.1	0.4	0.06	0.10	
	40	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	80	0.1	0.4	0.06	0.07	
	50	655.605	0.1	50	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	60	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	65	655.605	0.1	30	0.1	0.2	0.04	0.07	655.605	0.1	35	0.1	0.2	0.04	0.07	

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

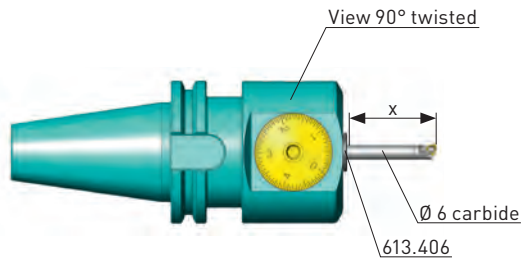

Workpiece material	Boring depth X [mm]	universal Ø 7.3 - 12.3 mm							optimized Ø 7.3 - 7.8 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	10	655.603	0.2	120	0.1	0.3	0.06	0.10	655.603	0.2	180	0.1	0.3	0.06	0.10	
	20	655.603	0.2	100	0.1	0.3	0.06	0.10	655.603	0.2	140	0.1	0.3	0.06	0.10	
	30	655.603	0.2	80	0.1	0.3	0.06	0.09	655.603	0.2	100	0.1	0.3	0.06	0.09	
	40	655.605	0.1	70	0.1	0.2	0.04	0.07	655.603	0.2	80	0.1	0.3	0.06	0.07	
	50	655.605	0.1	50	0.1	0.2	0.04	0.07	655.605	0.1	70	0.1	0.2	0.04	0.07	
	60	655.605	0.1	40	0.1	0.2	0.04	0.07	655.605	0.1	50	0.1	0.2	0.04	0.07	
	65	655.605	0.1	30	0.1	0.2	0.04	0.07	655.605	0.1	35	0.1	0.2	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	10	655.602	0.2	120	0.1	0.3	0.06	0.08	655.602	0.2	160	0.1	0.3	0.06	0.08
		20	655.602	0.2	100	0.1	0.3	0.06	0.08	655.602	0.2	130	0.1	0.3	0.06	0.08
		30	655.602	0.2	80	0.1	0.3	0.06	0.08	655.602	0.2	100	0.1	0.3	0.06	0.08
		40	655.606	0.1	70	0.1	0.2	0.04	0.06	655.602	0.2	80	0.1	0.3	0.06	0.06
		50	655.606	0.1	50	0.1	0.2	0.04	0.06	655.606	0.1	70	0.1	0.2	0.04	0.06
		60	655.606	0.1	40	0.1	0.2	0.04	0.06	655.606	0.1	50	0.1	0.2	0.04	0.06
		65	655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	35	0.1	0.2	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	10	655.601	0.2	140	0.1	0.3	0.06	0.12	655.601	0.2	200	0.1	0.3	0.06	0.12	
	20	655.601	0.2	130	0.1	0.3	0.06	0.12	655.601	0.2	180	0.1	0.3	0.06	0.12	
	30	655.601	0.2	110	0.1	0.3	0.06	0.10	655.601	0.2	150	0.1	0.3	0.06	0.10	
	40	655.601	0.2	90	0.1	0.2	0.06	0.10	655.601	0.2	120	0.1	0.3	0.06	0.10	
	50	655.604	0.1	70	0.1	0.2	0.04	0.07	655.601	0.2	100	0.1	0.3	0.06	0.07	
	60	655.604	0.1	60	0.1	0.2	0.04	0.07	655.604	0.1	80	0.1	0.2	0.04	0.07	
	65	655.604	0.1	50	0.1	0.2	0.04	0.07	655.604	0.1	50	0.1	0.2	0.04	0.07	
Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	10	655.602	0.2	140	0.1	0.3	0.06	0.12	655.602	0.2	200	0.1	0.3	0.06	0.12	
	20	655.602	0.2	130	0.1	0.3	0.06	0.12	655.602	0.2	180	0.1	0.3	0.06	0.12	
	30	655.602	0.2	110	0.1	0.3	0.06	0.10	655.602	0.2	150	0.1	0.3	0.06	0.10	
	40	655.602	0.2	90	0.1	0.2	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10	
	50	655.606	0.1	70	0.1	0.2	0.04	0.07	655.602	0.2	100	0.1	0.3	0.06	0.07	
	60	655.606	0.1	60	0.1	0.2	0.04	0.07	655.606	0.1	80	0.1	0.2	0.04	0.07	
	65	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
S Titanium 3.7164	10	655.602	0.2	100	0.1	0.3	0.06	0.10	655.602	0.2	120	0.1	0.3	0.06	0.10	
	20	655.602	0.2	80	0.1	0.3	0.06	0.10	655.602	0.2	100	0.1	0.3	0.06	0.10	
	30	655.602	0.2	60	0.1	0.3	0.06	0.09	655.602	0.2	80	0.1	0.3	0.06	0.09	
	40	655.606	0.1	50	0.1	0.2	0.04	0.07	655.606	0.1	70	0.1	0.2	0.04	0.07	
	50	655.606	0.1	40	0.1	0.2	0.04	0.07	655.606	0.1	60	0.1	0.2	0.04	0.07	
	60	655.606	0.1	30	0.1	0.2	0.04	0.07	655.606	0.1	50	0.1	0.2	0.04	0.07	
	65	655.606	0.1	25	0.1	0.2	0.04	0.07	655.606	0.1	30	0.1	0.2	0.04	0.07	
	Ni-basic-, Co-basic-, Alloys	10	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		20	655.602	0.2	50	0.1	0.2	0.06	0.08	655.602	0.2	50	0.1	0.2	0.06	0.08
		30	655.602	0.2	30	0.1	0.2	0.06	0.06	655.602	0.2	30	0.1	0.2	0.06	0.06
40		655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06	
50		655.606	0.1	30	0.1	0.2	0.04	0.06	655.606	0.1	30	0.1	0.2	0.04	0.06	

#### When applying the optimized cutting data:


- the boring diameter of 7.8 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

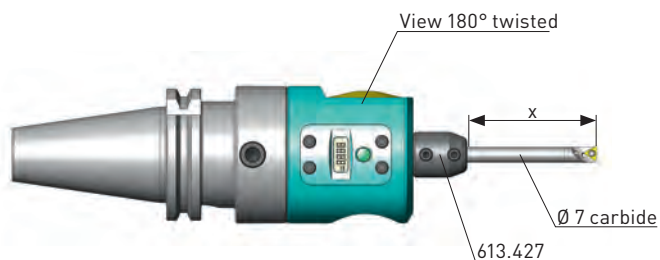

Workpiece material	Boring depth X [mm]	universal Ø 7.8 - 12.8 mm							optimized Ø 7.8 - 8.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.738	0.3	180	0.1	0.5	0.08	0.12	
	30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.738	0.3	150	0.1	0.5	0.08	0.12	
	40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	110	0.1	0.4	0.06	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	85	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	
	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.738	0.3	180	0.1	0.5	0.08	0.12	
	30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.738	0.3	150	0.1	0.5	0.08	0.12	
	40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	110	0.1	0.4	0.06	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	85	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	
	M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764 Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
		30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
60		651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
70		651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
85		651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	
20		651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10	
30		651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10	
40		651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
50		651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08	
60		651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
70		651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
85		651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	
K Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571 Gray cast iron		20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10
		30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	120	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
	85	651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	
	20	651.837	0.2	120	0.1	0.6	0.06	0.12	651.735	0.3	180	0.1	0.6	0.08	0.12	
	30	651.837	0.2	100	0.1	0.6	0.06	0.12	651.735	0.3	150	0.1	0.6	0.08	0.12	
	40	651.837	0.2	90	0.1	0.6	0.06	0.10	651.735	0.3	110	0.1	0.6	0.08	0.10	
GG15 GG 20 GG 25 GG 30	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.4	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	85	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

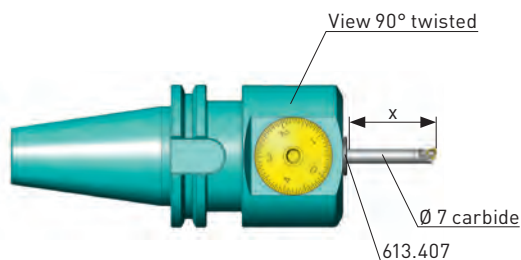


Workpiece material	Boring depth X [mm]	universal Ø 7.8 - 12.8 mm							optimized Ø 7.8 - 8.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	20	651.837	0.2	120	0.1	0.5	0.06	0.12	651.735	0.3	180	0.1	0.5	0.08	0.12	
	30	651.837	0.2	100	0.1	0.5	0.06	0.12	651.735	0.3	150	0.1	0.5	0.08	0.12	
	40	651.837	0.2	90	0.1	0.4	0.06	0.10	651.735	0.3	110	0.1	0.5	0.08	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.837	0.2	120	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
		30	651.837	0.2	100	0.1	0.5	0.06	0.10	651.737	0.3	140	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
		75	651.824	0.1	25	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	20	651.825	0.2	150	0.1	0.5	0.06	0.14	651.723	0.3	220	0.1	0.5	0.08	0.14	
	30	651.825	0.2	130	0.1	0.5	0.06	0.14	651.723	0.3	200	0.1	0.5	0.08	0.14	
	40	651.825	0.2	110	0.1	0.5	0.06	0.12	651.723	0.3	180	0.1	0.5	0.08	0.12	
	50	651.823	0.1	90	0.1	0.4	0.04	0.12	651.825	0.2	130	0.1	0.4	0.06	0.12	
	60	651.823	0.1	70	0.1	0.3	0.04	0.10	651.825	0.2	100	0.1	0.4	0.06	0.10	
	70	651.823	0.1	60	0.1	0.3	0.04	0.08	651.823	0.1	70	0.1	0.3	0.04	0.08	
	75	651.823	0.1	40	0.1	0.3	0.04	0.08	651.823	0.1	40	0.1	0.3	0.04	0.08	
Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	20	651.837	0.2	150	0.1	0.5	0.06	0.14	651.737	0.3	220	0.1	0.5	0.08	0.14	
	30	651.837	0.2	130	0.1	0.5	0.06	0.14	651.737	0.3	200	0.1	0.5	0.08	0.14	
	40	651.837	0.2	110	0.1	0.5	0.06	0.12	651.737	0.3	180	0.1	0.5	0.08	0.12	
	50	651.824	0.1	90	0.1	0.4	0.04	0.12	651.837	0.2	130	0.1	0.4	0.06	0.12	
	60	651.824	0.1	70	0.1	0.3	0.04	0.10	651.837	0.2	100	0.1	0.4	0.06	0.10	
	70	651.824	0.1	60	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	75	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	40	0.1	0.3	0.04	0.08	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	20	651.837	0.2	100	0.1	0.5	0.06	0.12	651.737	0.3	120	0.1	0.5	0.08	0.12	
	30	651.837	0.2	80	0.1	0.5	0.06	0.12	651.737	0.3	100	0.1	0.5	0.08	0.12	
	40	651.824	0.1	60	0.1	0.4	0.04	0.10	651.837	0.2	80	0.1	0.4	0.06	0.10	
	50	651.824	0.1	50	0.1	0.4	0.04	0.10	651.837	0.2	70	0.1	0.4	0.06	0.10	
	60	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	60	0.1	0.3	0.04	0.08	
	70	651.824	0.1	30	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	25	0.1	0.3	0.04	0.07	651.824	0.1	30	0.1	0.3	0.04	0.07	
	20	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
	30	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
	40	651.824	0.1	30	0.1	0.3	0.04	0.08	651.839	0.2	30	0.1	0.3	0.06	0.08	
	50	651.824	0.1	30	0.1	0.3	0.04	0.08	651.824	0.1	30	0.1	0.3	0.04	0.08	
	60	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	

**When applying the optimized cutting data:**

- the boring diameter of 8.8 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required




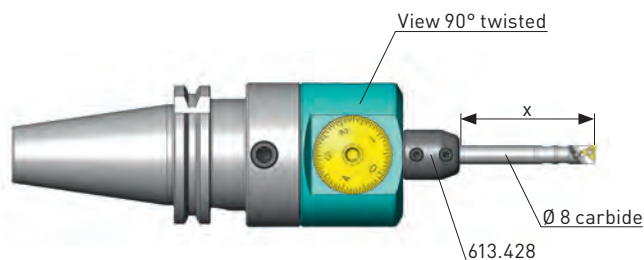

Workpiece material	Boring depth X [mm]	universal Ø 8.8 - 13.8 mm							optimized Ø 8.8 - 9.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.738	0.3	200	0.1	0.5	0.08	0.12	
	30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.738	0.3	160	0.1	0.5	0.08	0.12	
	40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	120	0.1	0.4	0.06	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	100	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.738	0.3	200	0.1	0.5	0.08	0.12
		30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.738	0.3	160	0.1	0.5	0.08	0.12
		40	651.824	0.1	90	0.1	0.4	0.04	0.10	651.838	0.2	120	0.1	0.4	0.06	0.10
		50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	100	0.1	0.4	0.06	0.10
		60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08
		70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08
		75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10	
	30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10	
	40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
	50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08	
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
	75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10	
	30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10	
	40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08	
	50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08	
	60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06	
	70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06	
	75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	160	0.1	0.5	0.08	0.10
		30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	130	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.1	0.4	0.06	0.08
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
		75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06
Gray cast iron GG15 GG 20 GG 25 GG 30	20	651.837	0.2	130	0.1	0.6	0.06	0.12	651.735	0.3	200	0.1	0.6	0.08	0.12	
	30	651.837	0.2	110	0.1	0.6	0.06	0.12	651.735	0.3	160	0.1	0.6	0.08	0.12	
	40	651.837	0.2	90	0.1	0.6	0.06	0.10	651.735	0.3	120	0.1	0.6	0.08	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	100	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.4	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07	

**Caution:**


The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

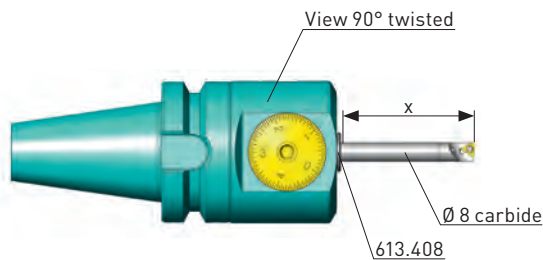

Workpiece material	Boring depth X [mm]	universal Ø 8.8 - 13.8 mm							optimized Ø 8.8 - 9.8 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	20	651.837	0.2	130	0.1	0.5	0.06	0.12	651.735	0.3	200	0.1	0.5	0.08	0.12	
	30	651.837	0.2	110	0.1	0.5	0.06	0.12	651.735	0.3	160	0.1	0.5	0.08	0.12	
	40	651.837	0.2	90	0.1	0.4	0.06	0.10	651.735	0.3	120	0.1	0.5	0.08	0.10	
	50	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	100	0.1	0.4	0.06	0.10	
	60	651.824	0.1	55	0.1	0.3	0.04	0.08	651.834	0.2	70	0.1	0.4	0.06	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	45	0.1	0.3	0.04	0.07	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	20	651.837	0.2	130	0.1	0.5	0.06	0.10	651.737	0.3	180	0.1	0.5	0.08	0.10
		30	651.837	0.2	110	0.1	0.5	0.06	0.10	651.737	0.3	150	0.1	0.5	0.08	0.10
		40	651.824	0.1	90	0.1	0.4	0.04	0.08	651.837	0.2	110	0.1	0.4	0.06	0.08
		50	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	100	0.1	0.4	0.06	0.08
		60	651.824	0.1	55	0.1	0.3	0.04	0.06	651.824	0.1	70	0.1	0.3	0.04	0.06
		70	651.824	0.1	40	0.1	0.3	0.04	0.06	651.824	0.1	50	0.1	0.3	0.04	0.06
		75	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	45	0.1	0.3	0.04	0.06
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	20	651.825	0.2	180	0.1	0.5	0.06	0.14	651.723	0.3	260	0.1	0.5	0.08	0.14	
	30	651.825	0.2	170	0.1	0.5	0.06	0.14	651.723	0.3	260	0.1	0.5	0.08	0.14	
	40	651.825	0.2	150	0.1	0.5	0.06	0.12	651.723	0.3	200	0.1	0.5	0.08	0.12	
	50	651.823	0.1	120	0.1	0.4	0.04	0.12	651.825	0.2	150	0.1	0.4	0.06	0.12	
	60	651.823	0.1	80	0.1	0.3	0.04	0.10	651.825	0.2	120	0.1	0.4	0.06	0.10	
	70	651.823	0.1	70	0.1	0.3	0.04	0.08	651.823	0.1	80	0.1	0.3	0.04	0.08	
	75	651.823	0.1	60	0.1	0.3	0.04	0.08	651.823	0.1	70	0.1	0.3	0.04	0.08	
Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	20	651.837	0.2	180	0.1	0.5	0.06	0.14	651.737	0.3	260	0.1	0.5	0.08	0.14	
	30	651.837	0.2	170	0.1	0.5	0.06	0.14	651.737	0.3	260	0.1	0.5	0.08	0.14	
	40	651.837	0.2	150	0.1	0.5	0.06	0.12	651.737	0.3	200	0.1	0.5	0.08	0.12	
	50	651.824	0.1	120	0.1	0.4	0.04	0.12	651.837	0.2	150	0.1	0.4	0.06	0.12	
	60	651.824	0.1	80	0.1	0.3	0.04	0.10	651.837	0.2	120	0.1	0.4	0.06	0.10	
	70	651.824	0.1	70	0.1	0.3	0.04	0.08	651.824	0.1	80	0.1	0.3	0.04	0.08	
	75	651.824	0.1	60	0.1	0.3	0.04	0.08	651.824	0.1	70	0.1	0.3	0.04	0.08	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	20	651.837	0.2	100	0.1	0.5	0.06	0.12	651.737	0.3	120	0.1	0.5	0.08	0.12	
	30	651.837	0.2	80	0.1	0.5	0.06	0.12	651.737	0.3	100	0.1	0.5	0.08	0.12	
	40	651.824	0.1	70	0.1	0.4	0.04	0.10	651.837	0.2	80	0.1	0.4	0.06	0.10	
	50	651.824	0.1	60	0.1	0.4	0.04	0.10	651.837	0.2	70	0.1	0.4	0.06	0.10	
	60	651.824	0.1	50	0.1	0.3	0.04	0.08	651.824	0.1	60	0.1	0.3	0.04	0.08	
	70	651.824	0.1	40	0.1	0.3	0.04	0.08	651.824	0.1	50	0.1	0.3	0.04	0.08	
	75	651.824	0.1	30	0.1	0.3	0.04	0.07	651.824	0.1	40	0.1	0.3	0.04	0.07	
	20	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
	30	651.839	0.2	50	0.1	0.4	0.06	0.10	651.839	0.2	50	0.1	0.4	0.06	0.10	
	40	651.824	0.1	30	0.1	0.3	0.04	0.08	651.839	0.2	30	0.1	0.3	0.06	0.08	
	50	651.824	0.1	30	0.1	0.3	0.04	0.08	651.824	0.1	30	0.1	0.3	0.04	0.08	
	60	651.824	0.1	30	0.1	0.3	0.04	0.06	651.824	0.1	30	0.1	0.3	0.04	0.06	

#### When applying the optimized cutting data:

- the boring diameter of 9.8 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

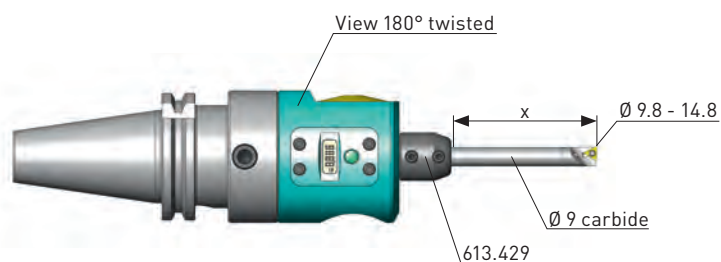


universal

Workpiece material	Boring depth X [mm]	universal Ø 9.8 - 14.8 mm							optimized Ø 9.8 - 12.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715 Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	30	651.837	0.2	130	0.2	0.6	0.06	0.14	651.738	0.3	200	0.2	0.6	0.08	0.14	
	40	651.837	0.2	110	0.2	0.6	0.06	0.14	651.738	0.3	160	0.2	0.6	0.08	0.14	
	50	651.837	0.2	90	0.2	0.6	0.06	0.12	651.738	0.3	120	0.2	0.6	0.08	0.12	
	60	651.824	0.1	70	0.1	0.4	0.04	0.12	651.838	0.2	100	0.2	0.4	0.06	0.12	
	70	651.824	0.1	55	0.1	0.4	0.04	0.10	651.838	0.2	70	0.2	0.4	0.06	0.10	
	85	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
	100	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	30	651.837	0.2	130	0.2	0.6	0.06	0.14	651.738	0.3	200	0.2	0.6	0.08	0.14	
	40	651.837	0.2	110	0.2	0.6	0.06	0.14	651.738	0.3	160	0.2	0.6	0.08	0.14	
	50	651.837	0.2	90	0.2	0.6	0.06	0.12	651.738	0.3	120	0.2	0.6	0.08	0.12	
	60	651.824	0.1	70	0.1	0.4	0.04	0.12	651.838	0.2	100	0.2	0.4	0.06	0.12	
	70	651.824	0.1	55	0.1	0.4	0.04	0.10	651.838	0.2	70	0.2	0.4	0.06	0.10	
	85	651.824	0.1	40	0.2	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
	100	651.824	0.1	25	0.2	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764 Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	30	651.837	0.2	130	0.2	0.6	0.06	0.12	651.737	0.3	180	0.2	0.6	0.08	0.12
		40	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12
		50	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
		60	651.824	0.1	70	0.1	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
70		651.824	0.1	55	0.1	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08	
85		651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
100		651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
30		651.837	0.2	130	0.2	0.6	0.06	0.12	651.737	0.3	180	0.2	0.6	0.08	0.12	
40		651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12	
50		651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10	
60		651.824	0.1	70	0.1	0.4	0.04	0.10	651.837	0.2	90	0.2	0.4	0.06	0.10	
70		651.824	0.1	55	0.1	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08	
85		651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
100		651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30		30	651.837	0.2	130	0.2	0.8	0.06	0.14	651.735	0.3	200	0.2	0.8	0.08	0.14
		40	651.837	0.2	110	0.2	0.8	0.06	0.14	651.735	0.3	160	0.2	0.8	0.08	0.14
		50	651.837	0.2	90	0.2	0.6	0.06	0.12	651.735	0.3	120	0.2	0.6	0.08	0.12
		60	651.837	0.2	70	0.2	0.6	0.06	0.12	651.834	0.2	100	0.2	0.6	0.06	0.12
	70	651.824	0.1	55	0.1	0.4	0.04	0.10	651.834	0.2	70	0.2	0.4	0.06	0.10	
	85	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
	100	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

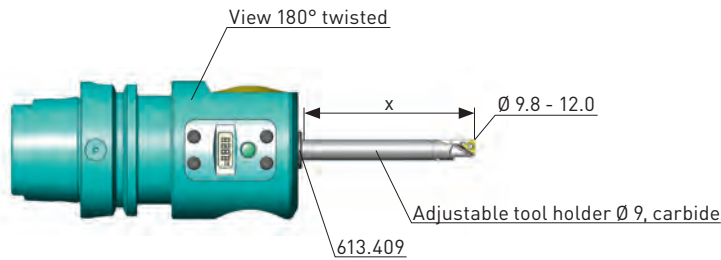


optimized

Workpiece material	Boring depth X [mm]	universal Ø 9.8 - 14.8 mm							optimized Ø 9.8 - 12.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	30	651.837	0.2	130	0.2	0.6	0.06	0.14	651.735	0.3	200	0.2	0.6	0.08	0.14	
	40	651.837	0.2	110	0.2	0.6	0.06	0.14	651.735	0.3	160	0.2	0.6	0.08	0.14	
	50	651.837	0.2	90	0.2	0.6	0.06	0.12	651.735	0.3	120	0.2	0.6	0.08	0.12	
	60	651.824	0.1	70	0.1	0.4	0.04	0.12	651.834	0.2	100	0.2	0.4	0.06	0.12	
	70	651.824	0.1	55	0.1	0.4	0.04	0.10	651.834	0.2	70	0.2	0.4	0.06	0.10	
	85	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08	
	100	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	30	651.837	0.2	130	0.2	0.6	0.06	0.12	651.737	0.3	180	0.2	0.6	0.08	0.12
		40	651.837	0.2	110	0.2	0.6	0.06	0.12	651.737	0.3	150	0.2	0.6	0.08	0.12
		50	651.837	0.2	90	0.2	0.6	0.06	0.10	651.737	0.3	120	0.2	0.6	0.08	0.10
		60	651.824	0.1	70	0.1	0.4	0.04	0.10	651.837	0.2	100	0.2	0.4	0.06	0.10
		70	651.824	0.1	55	0.1	0.4	0.04	0.08	651.837	0.2	70	0.2	0.4	0.06	0.08
		85	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	50	0.1	0.4	0.04	0.08
		100	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	30	651.825	0.2	180	0.2	0.6	0.06	0.16	651.723	0.3	300	0.2	0.6	0.08	0.16	
	40	651.825	0.2	170	0.2	0.6	0.06	0.16	651.723	0.3	260	0.2	0.6	0.08	0.16	
	50	651.825	0.2	140	0.2	0.6	0.06	0.14	651.723	0.3	200	0.2	0.6	0.08	0.14	
	60	651.825	0.2	110	0.2	0.5	0.06	0.14	651.723	0.3	160	0.2	0.5	0.08	0.14	
	70	651.823	0.1	80	0.1	0.4	0.04	0.12	651.825	0.2	120	0.2	0.4	0.06	0.12	
	85	651.823	0.1	60	0.1	0.4	0.04	0.12	651.823	0.1	80	0.1	0.4	0.04	0.12	
	100	651.823	0.1	40	0.1	0.4	0.04	0.10	651.823	0.1	40	0.1	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	30	651.837	0.2	180	0.2	0.6	0.06	0.16	651.737	0.3	300	0.2	0.6	0.08	0.16
		40	651.837	0.2	170	0.2	0.6	0.06	0.16	651.737	0.3	260	0.2	0.6	0.08	0.16
		50	651.837	0.2	140	0.2	0.6	0.06	0.14	651.737	0.3	200	0.2	0.6	0.08	0.14
60		651.824	0.1	110	0.2	0.5	0.04	0.12	651.737	0.3	160	0.2	0.5	0.08	0.14	
70		651.824	0.1	80	0.1	0.4	0.04	0.12	651.837	0.2	120	0.2	0.4	0.06	0.12	
85		651.824	0.1	60	0.1	0.4	0.04	0.12	651.824	0.1	80	0.1	0.4	0.04	0.12	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	30	651.837	0.2	100	0.2	0.6	0.06	0.14	651.737	0.3	120	0.2	0.6	0.08	0.14	
	40	651.837	0.2	80	0.2	0.6	0.06	0.14	651.737	0.3	100	0.2	0.6	0.08	0.14	
	50	651.837	0.2	70	0.2	0.6	0.06	0.12	651.837	0.2	80	0.2	0.6	0.06	0.12	
	60	651.824	0.1	60	0.1	0.4	0.04	0.12	651.837	0.2	70	0.2	0.4	0.06	0.12	
	70	651.824	0.1	50	0.1	0.4	0.04	0.10	651.824	0.1	60	0.1	0.4	0.04	0.10	
	85	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	40	0.1	0.4	0.04	0.08	
	100	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	30	651.839	0.2	50	0.1	0.5	0.06	0.12	651.839	0.2	50	0.1	0.5	0.06	0.12	
	40	651.839	0.2	50	0.1	0.5	0.06	0.12	651.839	0.2	50	0.1	0.5	0.06	0.12	
	50	651.839	0.2	30	0.1	0.5	0.06	0.10	651.839	0.2	30	0.1	0.5	0.06	0.10	
	60	651.824	0.1	30	0.1	0.4	0.04	0.08	651.839	0.2	30	0.1	0.4	0.06	0.08	
	70	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 12.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

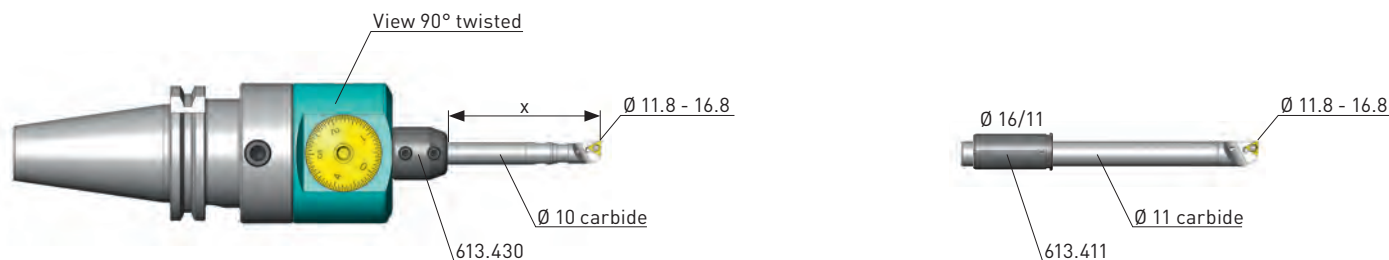

universal


Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 16.8 mm							optimized Ø 11.8 - 14.0 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	30	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14	
	45	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	200	0.2	0.8	0.08	0.14	
	60	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	150	0.2	0.6	0.08	0.12	
	75	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	120	0.2	0.6	0.06	0.12	
	90	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.2	0.4	0.06	0.10	
	105	651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
	120	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	30	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14
		45	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	200	0.2	0.8	0.08	0.14
		60	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	150	0.2	0.6	0.08	0.12
		75	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	120	0.2	0.6	0.06	0.12
		90	651.824	0.1	70	0.1	0.4	0.04	0.10	651.838	0.2	90	0.2	0.4	0.06	0.10
105		651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12	
	45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	190	0.2	0.8	0.08	0.12	
	60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	150	0.2	0.6	0.08	0.10	
	75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10	
	90	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.2	0.4	0.06	0.08	
	105	651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12	
	45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	190	0.2	0.8	0.08	0.12	
	60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	150	0.2	0.6	0.08	0.10	
	75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10	
	90	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.2	0.4	0.06	0.08	
	105	651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
	120	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	200	0.2	0.8	0.08	0.12
		45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	180	0.2	0.8	0.08	0.12
		60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	150	0.2	0.6	0.08	0.10
		75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10
		90	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.2	0.4	0.06	0.08
105		651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
Gray cast iron GG15 GG20 GG25 GG30	30	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14	
	45	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	200	0.2	0.8	0.10	0.14	
	60	651.834	0.2	125	0.2	0.6	0.06	0.12	651.735	0.3	150	0.2	0.6	0.08	0.12	
	75	651.834	0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	120	0.2	0.6	0.06	0.12	
	90	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.2	0.4	0.06	0.10	
	105	651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
120	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For universal applications there are tool holders with shank Ø 10.0 and Ø 11.0 mm available in different lengths and with screw on or soldered insert holders available. The cutting data are for all tool holders the same.



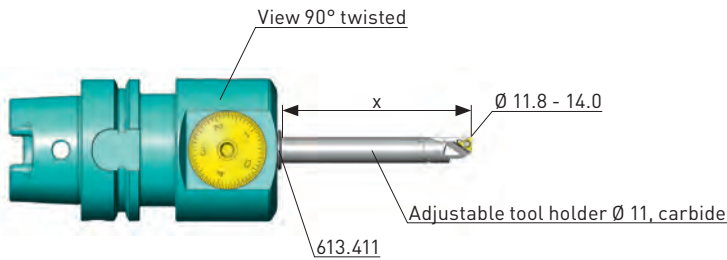


optimized

Workpiece material	Boring depth X [mm]	universal Ø 11.8 - 16.8							optimized Ø 11.8 - 14.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	30	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14	
	45	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	200	0.2	0.8	0.10	0.14	
	60	651.834	0.2	125	0.2	0.6	0.06	0.12	651.735	0.3	150	0.2	0.6	0.08	0.12	
	75	651.834	0.2	100	0.2	0.6	0.06	0.12	651.834	0.2	120	0.2	0.6	0.06	0.12	
	90	651.824	0.1	70	0.1	0.4	0.04	0.10	651.834	0.2	90	0.2	0.4	0.06	0.10	
	105	651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
	120	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	30	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12
		45	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	190	0.2	0.8	0.08	0.12
		60	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	150	0.2	0.6	0.08	0.10
		75	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	120	0.2	0.6	0.06	0.10
		90	651.824	0.1	70	0.1	0.4	0.04	0.08	651.837	0.2	90	0.2	0.4	0.06	0.08
105		651.824	0.1	45	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	30	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	350	0.2	0.8	0.10	0.16	
	45	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	320	0.2	0.8	0.10	0.16	
	60	651.723	0.3	170	0.2	0.6	0.08	0.14	651.723	0.3	250	0.2	0.6	0.08	0.14	
	75	651.825	0.2	150	0.2	0.6	0.06	0.14	651.723	0.3	180	0.2	0.6	0.08	0.14	
	90	651.825	0.2	110	0.2	0.4	0.06	0.12	651.825	0.2	130	0.2	0.4	0.06	0.12	
	105	651.823	0.1	70	0.1	0.4	0.04	0.12	651.823	0.1	80	0.1	0.4	0.04	0.12	
	120	651.823	0.1	30	0.1	0.4	0.04	0.10	651.823	0.1	40	0.1	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	30	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	350	0.2	0.8	0.08	0.16
		45	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	320	0.2	0.8	0.08	0.16
		60	651.737	0.3	170	0.2	0.6	0.08	0.14	651.737	0.3	250	0.2	0.6	0.08	0.14
		75	651.837	0.2	150	0.2	0.6	0.06	0.14	651.737	0.3	180	0.2	0.6	0.08	0.14
		90	651.837	0.2	110	0.2	0.4	0.06	0.12	651.837	0.2	130	0.2	0.4	0.06	0.12
105		651.824	0.1	70	0.1	0.4	0.04	0.12	651.824	0.1	80	0.1	0.4	0.04	0.12	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	30	651.737	0.3	100	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	45	651.737	0.3	80	0.2	0.8	0.08	0.14	651.737	0.3	100	0.2	0.8	0.08	0.14	
	60	651.837	0.2	70	0.2	0.6	0.06	0.12	651.837	0.2	80	0.2	0.6	0.06	0.12	
	75	651.837	0.2	60	0.2	0.6	0.06	0.12	651.837	0.2	70	0.2	0.6	0.06	0.12	
	90	651.824	0.1	50	0.1	0.4	0.04	0.10	651.824	0.1	60	0.1	0.4	0.04	0.10	
	105	651.824	0.1	40	0.1	0.4	0.04	0.08	651.824	0.1	40	0.1	0.4	0.04	0.08	
	120	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	30	651.839	0.2	50	0.1	0.6	0.06	0.12	651.839	0.2	50	0.1	0.6	0.06	0.12	
	45	651.839	0.2	50	0.1	0.6	0.06	0.12	651.839	0.2	50	0.1	0.6	0.06	0.12	
	60	651.839	0.2	30	0.1	0.6	0.06	0.10	651.839	0.2	30	0.1	0.6	0.06	0.10	
	75	651.824	0.1	30	0.1	0.4	0.04	0.10	651.839	0.2	30	0.1	0.4	0.06	0.10	
	90	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
105	651.824	0.1	20	0.1	0.4	0.04	0.08	651.824	0.1	20	0.1	0.4	0.04	0.08		

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 14.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

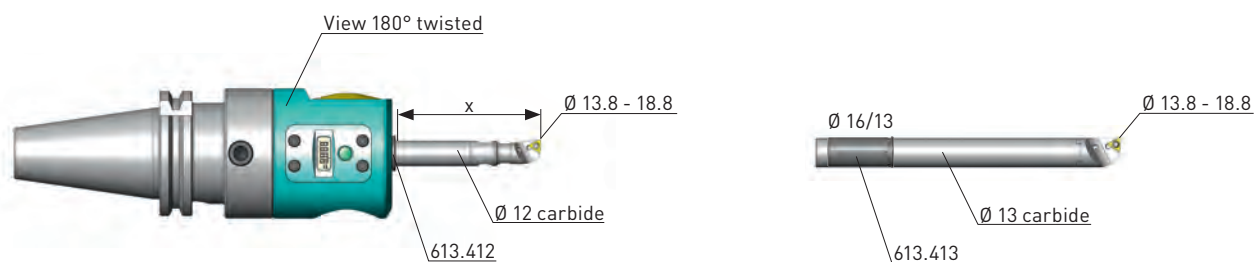


universal

Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 18.8 mm							optimized Ø 13.8 - 17.0 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.	
Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	651.737	0.3	170	0.2	0.8	0.08	0.14	651.738	0.3	260	0.2	0.8	0.08	0.14	
	55	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14	
	70	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	200	0.2	0.8	0.08	0.12	
	85	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12	
	100	651.837	0.2	80	0.2	0.6	0.06	0.10	651.838	0.2	120	0.2	0.6	0.06	0.10	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08	
	130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	651.737	0.3	170	0.2	0.8	0.08	0.14	651.738	0.3	260	0.2	0.8	0.08	0.14
		55	651.737	0.3	150	0.2	0.8	0.08	0.14	651.738	0.3	240	0.2	0.8	0.08	0.14
		70	651.837	0.2	125	0.2	0.6	0.06	0.12	651.738	0.3	200	0.2	0.8	0.08	0.12
		85	651.837	0.2	100	0.2	0.6	0.06	0.12	651.838	0.2	160	0.2	0.6	0.06	0.12
		100	651.837	0.2	80	0.2	0.6	0.06	0.10	651.838	0.2	120	0.2	0.6	0.06	0.10
		115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	240	0.2	0.8	0.08	0.12	
	55	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12	
	70	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10	
	85	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10	
	100	651.824	0.1	80	0.2	0.6	0.04	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08	
	130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	240	0.2	0.8	0.08	0.12	
	55	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12	
	70	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10	
	85	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10	
	100	651.824	0.1	80	0.2	0.6	0.04	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08	
	130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	40	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12
		55	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12
		70	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10
85		651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10	
100		651.824	0.1	80	0.2	0.6	0.04	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08	
115		651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08	
130		651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
Gray cast iron GG15 GG 20 GG 25 GG 30	40	651.735	0.3	170	0.2	0.8	0.08	0.14	651.734	0.4	260	0.2	0.8	0.10	0.14	
	55	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14	
	70	651.735	0.3	125	0.2	0.8	0.08	0.12	651.735	0.3	200	0.2	0.8	0.08	0.12	
	85	651.834	0.2	100	0.2	0.6	0.06	0.12	651.735	0.3	160	0.2	0.6	0.08	0.12	
	100	651.834	0.2	80	0.2	0.6	0.06	0.10	651.834	0.2	120	0.2	0.6	0.06	0.10	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.834	0.2	70	0.2	0.4	0.06	0.08	
130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

For universal applications there are tool holders with shank Ø 12.0 and Ø 13.0 mm available in different lengths and with screw on or soldered insert holders available. The cutting data are for all tool holders the same.

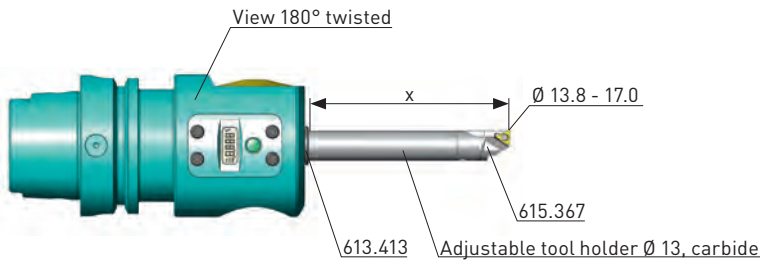


optimized

Workpiece material	Boring depth X [mm]	universal Ø 13.8 - 18.8 mm							optimized Ø 13.8 - 17.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	651.735	0.3	170	0.2	0.8	0.08	0.14	651.734	0.4	260	0.2	0.8	0.10	0.14	
	55	651.735	0.3	150	0.2	0.8	0.08	0.14	651.734	0.4	240	0.2	0.8	0.10	0.14	
	70	651.735	0.3	125	0.2	0.8	0.08	0.12	651.735	0.3	200	0.2	0.6	0.08	0.12	
	85	651.834	0.2	100	0.2	0.6	0.06	0.12	651.735	0.3	160	0.2	0.6	0.08	0.12	
	100	651.834	0.2	80	0.2	0.6	0.06	0.10	651.834	0.2	120	0.2	0.4	0.06	0.10	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.834	0.2	70	0.2	0.4	0.04	0.08	
	130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	651.737	0.3	170	0.2	0.8	0.08	0.12	651.737	0.3	240	0.2	0.8	0.08	0.12
		55	651.737	0.3	150	0.2	0.8	0.08	0.12	651.737	0.3	220	0.2	0.8	0.08	0.12
		70	651.837	0.2	125	0.2	0.6	0.06	0.10	651.737	0.3	190	0.2	0.8	0.08	0.10
		85	651.837	0.2	100	0.2	0.6	0.06	0.10	651.837	0.2	160	0.2	0.6	0.06	0.10
		100	651.824	0.1	80	0.2	0.6	0.04	0.08	651.837	0.2	120	0.2	0.6	0.06	0.08
		115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	70	0.1	0.4	0.04	0.08
		130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	420	0.2	0.8	0.10	0.16	
	55	651.723	0.3	200	0.2	0.8	0.08	0.16	651.725	0.4	420	0.2	0.8	0.10	0.16	
	70	651.723	0.3	180	0.2	0.8	0.08	0.14	651.723	0.3	300	0.2	0.8	0.08	0.14	
	85	651.825	0.2	150	0.2	0.6	0.06	0.14	651.723	0.3	260	0.2	0.8	0.08	0.14	
	100	651.825	0.2	110	0.2	0.6	0.06	0.12	651.825	0.2	190	0.2	0.6	0.06	0.12	
	115	651.823	0.1	80	0.1	0.4	0.04	0.12	651.825	0.2	110	0.2	0.6	0.06	0.12	
	130	651.823	0.1	40	0.1	0.4	0.04	0.10	651.823	0.1	40	0.1	0.4	0.04	0.10	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	420	0.2	0.8	0.08	0.16	
	55	651.737	0.3	200	0.2	0.8	0.08	0.16	651.737	0.3	420	0.2	0.8	0.08	0.16	
	70	651.737	0.3	180	0.2	0.8	0.08	0.14	651.737	0.3	300	0.2	0.8	0.08	0.14	
	85	651.837	0.2	150	0.2	0.6	0.06	0.14	651.737	0.3	260	0.2	0.8	0.08	0.14	
	100	651.837	0.2	110	0.2	0.6	0.06	0.12	651.837	0.2	190	0.2	0.6	0.06	0.12	
	115	651.824	0.1	80	0.1	0.4	0.04	0.10	651.837	0.2	110	0.2	0.6	0.06	0.10	
	130	651.824	0.1	40	0.1	0.4	0.04	0.10	651.824	0.1	40	0.1	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	651.737	0.3	120	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	55	651.737	0.3	120	0.2	0.8	0.08	0.14	651.737	0.3	120	0.2	0.8	0.08	0.14	
	70	651.837	0.2	100	0.2	0.6	0.06	0.12	651.837	0.2	120	0.2	0.6	0.06	0.12	
	85	651.837	0.2	90	0.2	0.6	0.06	0.12	651.837	0.2	100	0.2	0.6	0.06	0.12	
	100	651.824	0.1	80	0.1	0.4	0.04	0.10	651.824	0.1	80	0.1	0.4	0.04	0.10	
	115	651.824	0.1	60	0.1	0.4	0.04	0.08	651.824	0.1	60	0.1	0.4	0.04	0.08	
	130	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	40	651.839	0.2	50	0.1	0.6	0.06	0.12	651.839	0.2	50	0.1	0.6	0.06	0.12	
	55	651.839	0.2	50	0.1	0.6	0.06	0.12	651.839	0.2	50	0.1	0.6	0.06	0.12	
	70	651.839	0.2	50	0.1	0.6	0.06	0.10	651.839	0.2	50	0.1	0.6	0.06	0.10	
	85	651.824	0.1	30	0.1	0.6	0.04	0.10	651.839	0.2	30	0.1	0.6	0.06	0.10	
	100	651.824	0.1	30	0.1	0.4	0.04	0.08	651.824	0.1	30	0.1	0.4	0.04	0.08	
	115	651.824	0.1	25	0.1	0.4	0.04	0.08	651.824	0.1	25	0.1	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 17.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

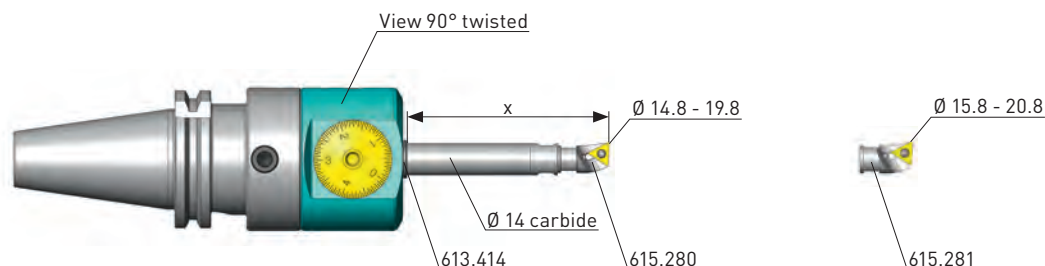


universal

Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 19.8 / 20.8 mm							optimized Ø 14.8-18.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	180	0.2	1.0	0.10	0.18	655.334	0.8	300	0.2	1.2	0.14	0.20	
	55	655.318	0.4	180	0.2	1.0	0.10	0.18	655.385	0.4	280	0.2	1.0	0.10	0.16	
	70	655.318	0.4	180	0.2	0.8	0.10	0.14	655.385	0.4	240	0.2	1.0	0.10	0.14	
	85	655.319	0.2	140	0.2	0.8	0.06	0.10	655.375	0.2	180	0.2	0.8	0.06	0.12	
	100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	140	0.2	0.6	0.06	0.10	
	115	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08	
	130	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	180	0.2	1.0	0.10	0.18	655.334	0.8	300	0.2	1.2	0.14	0.20
		55	655.318	0.4	180	0.2	1.0	0.10	0.18	655.385	0.4	280	0.2	1.0	0.10	0.16
		70	655.318	0.4	180	0.2	0.8	0.10	0.14	655.385	0.4	240	0.2	1.0	0.10	0.14
		85	655.319	0.2	140	0.2	0.8	0.06	0.10	655.375	0.2	180	0.2	0.8	0.06	0.12
		100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.375	0.2	140	0.2	0.6	0.06	0.10
		115	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08
130		655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08	
Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	180	0.2	1.0	0.10	0.16	655.320	0.8	280	0.2	1.2	0.14	0.16	
	55	655.318	0.4	180	0.2	1.0	0.10	0.16	655.318	0.4	260	0.2	1.0	0.10	0.14	
	70	655.318	0.4	180	0.2	0.8	0.10	0.14	655.318	0.4	220	0.2	1.0	0.10	0.12	
	85	655.319	0.2	140	0.2	0.8	0.06	0.10	655.319	0.2	160	0.2	0.8	0.06	0.10	
	100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.08	
	115	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08	
	130	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40	655.318	0.4	180	0.2	1.0	0.10	0.16	655.320	0.8	280	0.2	1.2	0.14	0.16	
	55	655.318	0.4	180	0.2	1.0	0.10	0.16	655.318	0.4	260	0.2	1.0	0.10	0.14	
	70	655.318	0.4	180	0.2	0.8	0.10	0.14	655.318	0.4	220	0.2	1.0	0.10	0.12	
	85	655.319	0.2	140	0.2	0.8	0.06	0.10	655.319	0.2	160	0.2	0.8	0.06	0.10	
	100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.08	
	115	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08	
	130	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	40	655.318	0.4	180	0.2	1.0	0.10	0.16	655.320	0.8	260	0.2	1.2	0.14	0.16
		55	655.318	0.4	180	0.2	1.0	0.10	0.16	655.318	0.4	240	0.2	1.0	0.10	0.14
		70	655.318	0.4	180	0.2	0.8	0.10	0.14	655.318	0.4	200	0.2	1.0	0.10	0.12
		85	655.319	0.2	140	0.2	0.8	0.06	0.10	655.319	0.2	160	0.2	0.8	0.06	0.10
		100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.08
		115	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08
130		655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30	40	655.380	0.4	180	0.2	1.2	0.10	0.18	655.303A	0.8	300	0.2	1.2	0.14	0.20	
	55	655.380	0.4	180	0.2	1.2	0.10	0.18	655.390	0.8	280	0.2	1.0	0.14	0.16	
	70	655.380	0.4	180	0.2	1.0	0.10	0.14	655.390	0.8	240	0.2	1.0	0.14	0.14	
	85	655.370	0.2	140	0.2	0.8	0.06	0.10	655.380	0.4	180	0.2	0.8	0.10	0.12	
	100	655.370	0.2	100	0.2	0.6	0.06	0.10	655.380	0.4	140	0.2	0.6	0.10	0.10	
	115	655.363	0.1	60	0.1	0.4	0.04	0.08	655.363	0.1	80	0.1	0.4	0.04	0.08	
130	655.363	0.1	30	0.1	0.4	0.04	0.08	655.363	0.1	40	0.1	0.4	0.04	0.08		

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.280 and 615.281 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.

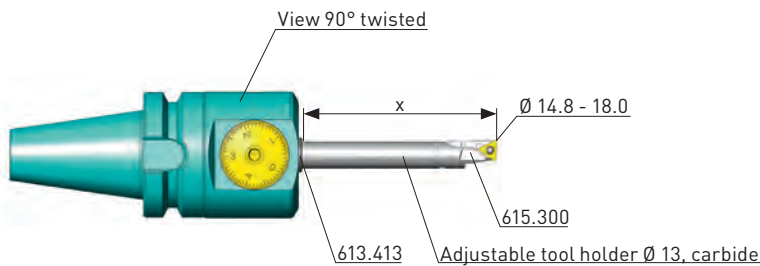

optimized


Workpiece material	Boring depth X [mm]	universal Ø 14.8 - 19.8 / 20.8 mm						optimized Ø 14.8 - 18.0 mm								
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	180	0.2	1.0	0.10	0.18	655.303A	0.8	300	0.2	1.2	0.14	0.20	
	50	655.380	0.4	180	0.2	1.0	0.10	0.18	655.390	0.8	280	0.2	1.0	0.14	0.16	
	60	655.380	0.4	180	0.2	0.8	0.10	0.14	655.390	0.8	240	0.2	1.0	0.14	0.14	
	80	655.370	0.2	140	0.2	0.8	0.06	0.10	655.380	0.4	180	0.2	0.8	0.10	0.12	
	100	655.370	0.2	100	0.2	0.6	0.06	0.10	655.380	0.4	140	0.2	0.6	0.10	0.10	
	120	655.363	0.1	60	0.1	0.4	0.04	0.08	655.363	0.1	80	0.1	0.4	0.04	0.08	
	135	655.363	0.1	30	0.1	0.4	0.04	0.08	655.363	0.1	40	0.1	0.4	0.04	0.08	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	180	0.2	1.0	0.10	0.16	655.320	0.8	280	0.2	1.2	0.14	0.16
		50	655.318	0.4	180	0.2	1.0	0.10	0.16	655.318	0.4	260	0.2	1.0	0.10	0.14
		60	655.318	0.4	180	0.2	0.8	0.10	0.14	655.318	0.4	220	0.2	1.0	0.10	0.12
		80	655.319	0.2	140	0.2	0.8	0.06	0.10	655.319	0.2	160	0.2	0.8	0.06	0.10
		100	655.319	0.2	100	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.08
		120	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	80	0.1	0.4	0.04	0.08
		135	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	40	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	200	0.2	1.0	0.10	0.20	655.397	0.8	500	0.2	1.5	0.14	0.22	
	50	655.388	0.4	200	0.2	1.0	0.10	0.20	655.398	0.8	450	0.2	1.5	0.14	0.20	
	60	655.388	0.4	200	0.2	0.8	0.10	0.16	655.388	0.4	350	0.2	1.2	0.10	0.18	
	80	655.378	0.2	180	0.2	0.8	0.06	0.14	655.388	0.4	300	0.2	1.0	0.10	0.16	
	100	655.378	0.2	150	0.2	0.6	0.06	0.12	655.378	0.2	200	0.2	0.8	0.06	0.14	
	120	655.378	0.2	100	0.2	0.6	0.06	0.10	655.378	0.2	150	0.2	0.6	0.06	0.12	
	135	655.363	0.1	40	0.1	0.6	0.04	0.10	655.363	0.1	80	0.1	0.4	0.04	0.10	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	200	0.2	1.0	0.10	0.20	655.320	0.8	500	0.2	1.5	0.14	0.22
		50	655.318	0.4	200	0.2	1.0	0.10	0.20	655.320	0.8	450	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	0.8	0.10	0.16	655.318	0.4	350	0.2	1.2	0.10	0.18
80		655.319	0.2	180	0.2	0.8	0.06	0.14	655.318	0.4	300	0.2	1.0	0.10	0.16	
100		655.319	0.2	150	0.2	0.6	0.06	0.12	655.319	0.2	200	0.2	0.8	0.06	0.14	
120		655.369	0.1	100	0.1	0.4	0.04	0.10	655.319	0.2	150	0.2	0.6	0.06	0.12	
135		655.369	0.1	40	0.1	0.4	0.04	0.10	655.369	0.1	80	0.1	0.4	0.04	0.10	
S Titanium 3.7164	40	655.318	0.4	120	0.2	1.0	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.16	
	50	655.318	0.4	120	0.2	1.0	0.10	0.18	655.318	0.4	120	0.2	1.5	0.10	0.14	
	60	655.318	0.4	120	0.2	0.8	0.10	0.14	655.318	0.4	120	0.2	1.2	0.10	0.12	
	80	655.319	0.2	100	0.2	0.8	0.06	0.10	655.319	0.2	100	0.2	1.0	0.06	0.10	
	100	655.319	0.2	80	0.2	0.6	0.06	0.10	655.319	0.2	80	0.2	0.8	0.06	0.08	
	120	655.369	0.1	60	0.1	0.4	0.04	0.08	655.369	0.1	60	0.1	0.6	0.04	0.08	
	135	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	Ni-basic-, Co-basic-, Alloys	40	655.326	0.4	50	0.1	0.8	0.10	0.14	655.326	0.4	50	0.1	0.8	0.10	0.14
		50	655.326	0.4	50	0.1	0.8	0.10	0.14	655.326	0.4	50	0.1	0.8	0.10	0.12
		60	655.316	0.2	40	0.1	0.6	0.06	0.12	655.316	0.2	40	0.1	0.6	0.06	0.10
		80	655.316	0.2	30	0.1	0.6	0.06	0.12	655.316	0.2	30	0.1	0.6	0.06	0.10
		100	655.369	0.1	30	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
		120	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08
		135	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 18.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required



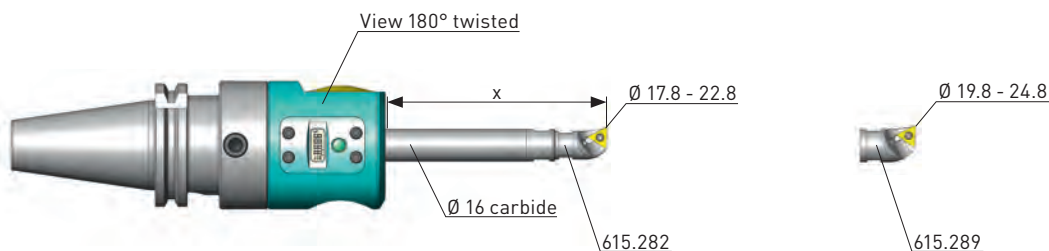


universal

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 22.8 / 24.8 mm							optimized Ø 16.8 - 22.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25	
	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25
		60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10
		Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14
	60		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
80	655.318		0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
100	655.318		0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
120	655.319		0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140	655.319		0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160	655.369		0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	250	0.2	1.2	0.14	0.18
100		655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	220	0.2	1.0	0.10	0.14	
120		655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140		655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160		655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.2	0.4	0.04	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30		40	655.380	0.4	200	0.2	2.0	0.10	0.18	655.303A	0.8	350	0.2	2.0	0.14	0.25
	60	655.380	0.4	200	0.2	1.8	0.10	0.18	655.303A	0.8	350	0.2	1.8	0.14	0.22	
	80	655.380	0.4	200	0.2	1.5	0.10	0.14	655.390	0.8	300	0.2	1.5	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.282 and 615.289 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.

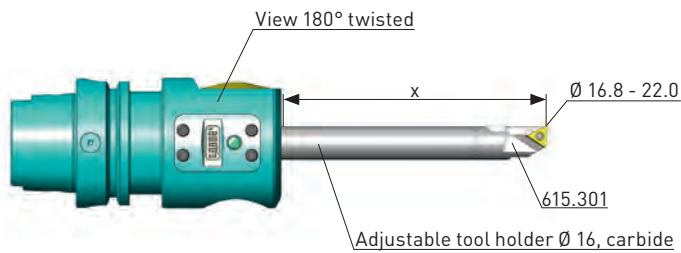


optimized

Workpiece material	Boring depth X [mm]	universal Ø 17.8 - 22.8 /24.8 mm						optimized Ø 16.8 - 22.0 mm								
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.25	
	60	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.22	
	80	655.380	0.4	200	0.2	1.2	0.10	0.14	655.390	0.8	300	0.2	1.2	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	780	0.2	1.5	0.14	0.30	
	60	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	700	0.2	1.5	0.14	0.30	
	80	655.388	0.4	240	0.2	1.2	0.10	0.16	655.397	0.8	650	0.2	1.2	0.14	0.25	
	100	655.388	0.4	200	0.2	1.0	0.10	0.14	655.398	0.8	400	0.2	1.0	0.14	0.20	
	120	655.378	0.2	180	0.2	0.8	0.06	0.12	655.388	0.4	250	0.2	0.8	0.10	0.16	
	140	655.378	0.2	110	0.2	0.6	0.06	0.10	655.378	0.2	120	0.2	0.6	0.06	0.12	
	160	655.378	0.2	30	0.2	0.4	0.06	0.10	655.378	0.2	40	0.2	0.4	0.06	0.10	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	60	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	80	655.318	0.4	240	0.2	1.2	0.10	0.16	655.320	0.8	650	0.2	1.2	0.14	0.25	
	100	655.318	0.4	200	0.2	1.0	0.10	0.14	655.318	0.4	400	0.2	1.0	0.10	0.20	
	120	655.319	0.2	180	0.2	0.8	0.06	0.12	655.318	0.4	250	0.2	0.8	0.10	0.16	
	140	655.319	0.2	110	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.12	
	160	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	40	0.1	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	60	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	80	655.318	0.4	120	0.2	1.2	0.10	0.14	655.318	0.4	120	0.2	1.2	0.10	0.18	
	100	655.318	0.4	100	0.2	1.0	0.10	0.10	655.318	0.4	100	0.2	1.0	0.10	0.14	
	120	655.319	0.2	80	0.2	0.8	0.06	0.10	655.319	0.2	80	0.2	0.8	0.06	0.12	
	140	655.369	0.1	60	0.1	0.6	0.04	0.08	655.319	0.2	60	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	40	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	60	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	80	655.316	0.2	40	0.1	0.8	0.06	0.12	655.326	0.4	40	0.1	0.8	0.10	0.12	
	100	655.316	0.2	30	0.1	0.6	0.06	0.10	655.316	0.2	30	0.1	0.6	0.06	0.10	
	120	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	30	0.1	0.4	0.04	0.10	
	140	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 22.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

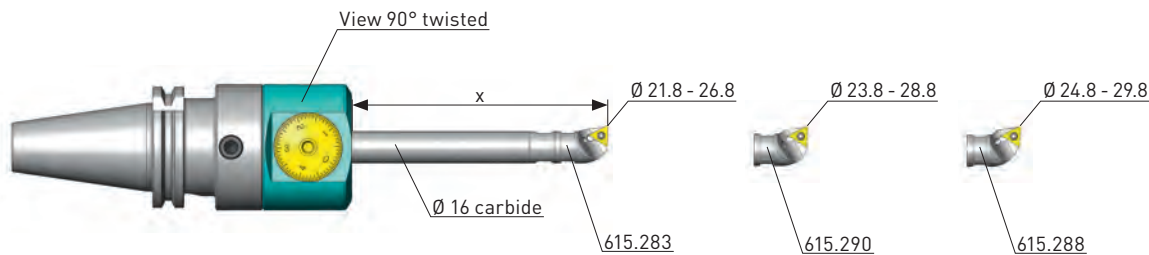


universal

Workpiece material	Boring depth X [mm]	universal Ø 21.8 - 26.8 / 28.8 / 29.8 mm							optimized Ø 21.8 - 27.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25	
	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25
		60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10
		Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14
	60		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
80	655.318		0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
100	655.318		0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
120	655.319		0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140	655.319		0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160	655.369		0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	250	0.2	1.2	0.14	0.18
100		655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	220	0.2	1.0	0.10	0.14	
120		655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140		655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160		655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30		40	655.380	0.4	200	0.2	2.0	0.10	0.18	655.303A	0.8	350	0.2	2.0	0.14	0.25
	60	655.380	0.4	200	0.2	1.8	0.10	0.18	655.303A	0.8	350	0.2	1.8	0.14	0.22	
	80	655.380	0.4	200	0.2	1.5	0.10	0.14	655.390	0.8	300	0.2	1.5	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.283, 615.290 and 615.288 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.

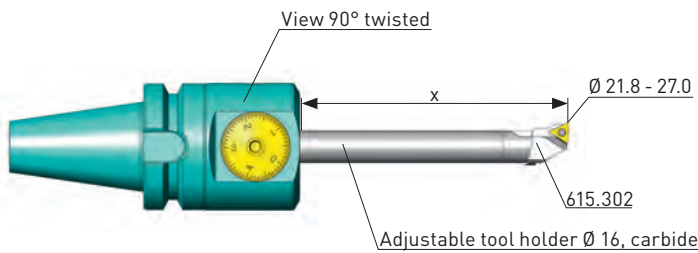


optimized

Workpiece material	Boring depth X [mm]	universal Ø 21.8 - 26.8 / 28.8 / 29.8 mm							optimized Ø 21.8 - 27.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.25	
	60	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.22	
	80	655.380	0.4	200	0.2	1.2	0.10	0.14	655.390	0.8	300	0.2	1.2	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	950	0.2	1.5	0.14	0.30	
	60	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	850	0.2	1.5	0.14	0.30	
	80	655.388	0.4	240	0.2	1.2	0.10	0.16	655.397	0.8	650	0.2	1.2	0.14	0.25	
	100	655.388	0.4	200	0.2	1.0	0.10	0.14	655.398	0.8	400	0.2	1.0	0.14	0.20	
	120	655.378	0.2	180	0.2	0.8	0.06	0.12	655.388	0.4	250	0.2	0.8	0.10	0.16	
	140	655.378	0.2	110	0.2	0.6	0.06	0.10	655.378	0.2	120	0.2	0.6	0.06	0.12	
	160	655.378	0.2	30	0.2	0.4	0.06	0.10	655.378	0.2	40	0.2	0.4	0.06	0.10	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	60	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	80	655.318	0.4	240	0.2	1.2	0.10	0.16	655.320	0.8	650	0.2	1.2	0.14	0.25	
	100	655.318	0.4	200	0.2	1.0	0.10	0.14	655.318	0.4	400	0.2	1.0	0.10	0.20	
	120	655.319	0.2	180	0.2	0.8	0.06	0.12	655.318	0.4	250	0.2	0.8	0.10	0.16	
	140	655.319	0.2	110	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.12	
	160	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	40	0.1	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	60	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	80	655.318	0.4	120	0.2	1.2	0.10	0.14	655.318	0.4	120	0.2	1.2	0.10	0.18	
	100	655.318	0.4	100	0.2	1.0	0.10	0.10	655.318	0.4	100	0.2	1.0	0.10	0.14	
	120	655.319	0.2	80	0.2	0.8	0.06	0.10	655.319	0.2	80	0.2	0.8	0.06	0.12	
	140	655.369	0.1	60	0.1	0.6	0.04	0.08	655.319	0.2	60	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	40	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	60	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	80	655.316	0.2	40	0.1	0.8	0.06	0.12	655.326	0.4	40	0.1	0.8	0.10	0.12	
	100	655.316	0.2	30	0.1	0.6	0.06	0.10	655.316	0.2	30	0.1	0.6	0.06	0.10	
	120	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	30	0.1	0.4	0.04	0.10	
	140	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 27.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

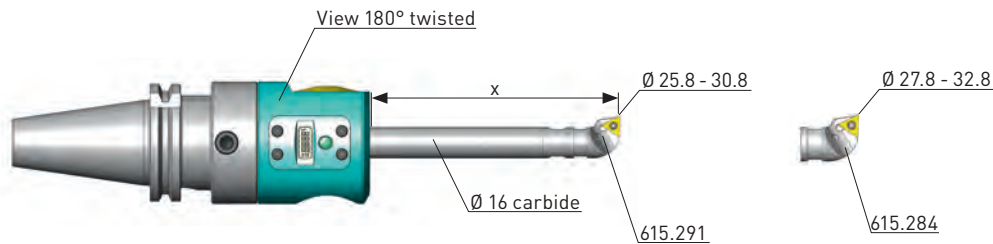

universal


Workpiece material	Boring depth X [mm]	universal Ø 25.8 - 30.8 / 32.8 mm							optimized Ø 26.8 - 33.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25	
	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10	
	Steel 450-850 N/mm <sup>2</sup> 1.0050 1.0503 1.1141 1.1191 1.5752	40	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.25
		60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10
		Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14
	60		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
80	655.318		0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
100	655.318		0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
120	655.319		0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140	655.319		0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160	655.369		0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	40		655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	250	0.2	1.2	0.14	0.18
100		655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	220	0.2	1.0	0.10	0.14	
120		655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140		655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
160		655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30		40	655.380	0.4	200	0.2	2.0	0.10	0.18	655.303A	0.8	350	0.2	2.0	0.14	0.25
	60	655.380	0.4	200	0.2	1.8	0.10	0.18	655.303A	0.8	350	0.2	1.8	0.14	0.22	
	80	655.380	0.4	200	0.2	1.5	0.10	0.14	655.390	0.8	300	0.2	1.5	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.291 and 615.284 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.



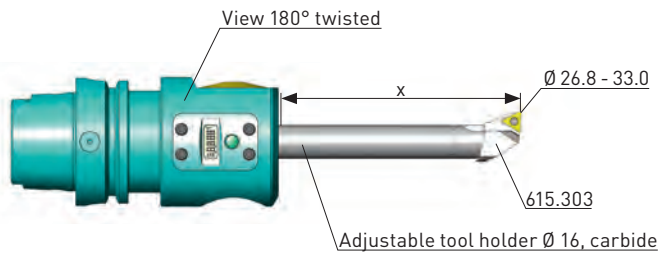


optimized

Workpiece material	Boring depth X [mm]	universal Ø 25.8 - 30.8 / 32.8 mm							optimized Ø 26.8 - 33.0 mm							
		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		Inserts		Vc m/min	Allow. mm/Ø		Feed mm/U		
		Order No.	R		Std. val.	Max.	Ra 1.6	Max.	Order No.	R		Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	40	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.25	
	60	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.22	
	80	655.380	0.4	200	0.2	1.2	0.10	0.14	655.390	0.8	300	0.2	1.2	0.14	0.20	
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16	
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14	
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	40	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
		80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
		100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
		120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
		140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
		160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	40	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	1100	0.2	1.5	0.14	0.30	
	60	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	950	0.2	1.5	0.14	0.30	
	80	655.388	0.4	240	0.2	1.2	0.10	0.16	655.397	0.8	650	0.2	1.2	0.14	0.25	
	100	655.388	0.4	200	0.2	1.0	0.10	0.14	655.398	0.8	400	0.2	1.0	0.14	0.20	
	120	655.378	0.2	180	0.2	0.8	0.06	0.12	655.388	0.4	250	0.2	0.8	0.10	0.16	
	140	655.378	0.2	110	0.2	0.6	0.06	0.10	655.378	0.2	120	0.2	0.6	0.06	0.12	
	160	655.378	0.2	30	0.2	0.4	0.06	0.10	655.378	0.2	40	0.2	0.4	0.06	0.10	
Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	40	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	60	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30	
	80	655.318	0.4	240	0.2	1.2	0.10	0.16	655.320	0.8	650	0.2	1.2	0.14	0.25	
	100	655.318	0.4	200	0.2	1.0	0.10	0.14	655.318	0.4	400	0.2	1.0	0.10	0.20	
	120	655.319	0.2	180	0.2	0.8	0.06	0.12	655.318	0.4	250	0.2	0.8	0.10	0.16	
	140	655.319	0.2	110	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.12	
	160	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	40	0.1	0.4	0.04	0.10	
S Titanium 3.7164  Ni-basic-, Co-basic-, Alloys	40	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	60	655.318	0.4	120	0.2	1.5	0.10	0.18	655.320	0.8	120	0.2	1.5	0.14	0.20	
	80	655.318	0.4	120	0.2	1.2	0.10	0.14	655.318	0.4	120	0.2	1.2	0.10	0.18	
	100	655.318	0.4	100	0.2	1.0	0.10	0.10	655.318	0.4	100	0.2	1.0	0.10	0.14	
	120	655.319	0.2	80	0.2	0.8	0.06	0.10	655.319	0.2	80	0.2	0.8	0.06	0.12	
	140	655.369	0.1	60	0.1	0.6	0.04	0.08	655.319	0.2	60	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	40	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	60	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16	
	80	655.316	0.2	40	0.1	0.8	0.06	0.12	655.326	0.4	40	0.1	0.8	0.10	0.12	
	100	655.316	0.2	30	0.1	0.6	0.06	0.10	655.316	0.2	30	0.1	0.6	0.06	0.10	
	120	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	30	0.1	0.4	0.04	0.10	
	140	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08	

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 33.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

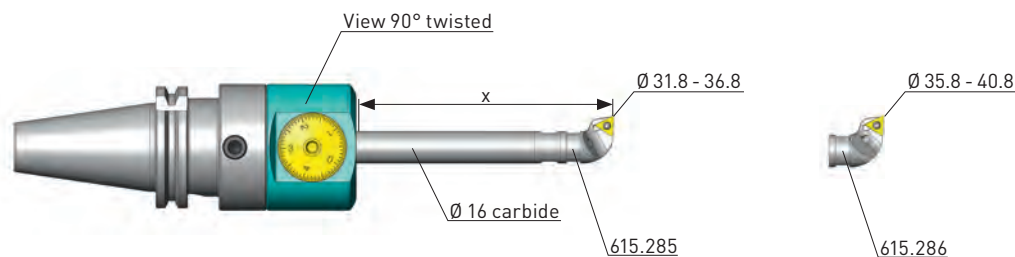


universal

Workpiece material	Boring depth X [mm]	universal Ø 31.8 - 36.8 / 40.8 mm							optimized Ø 31.8 - 40.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10	
	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10	
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10		
160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08		
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	280	0.2	1.5	0.14	0.20	
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	250	0.2	1.2	0.14	0.18	
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	220	0.2	1.0	0.10	0.14	
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12	
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10	
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08	
	K Gray cast iron GG15 GG 20 GG 25 GG 30	60	655.380	0.4	200	0.2	1.8	0.10	0.18	655.303A	0.8	350	0.2	1.8	0.14	0.22
		80	655.380	0.4	200	0.2	1.5	0.10	0.14	655.390	0.8	300	0.2	1.5	0.14	0.20
		100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16
		120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14
140		655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12	
160		655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.285 and 615.286 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.

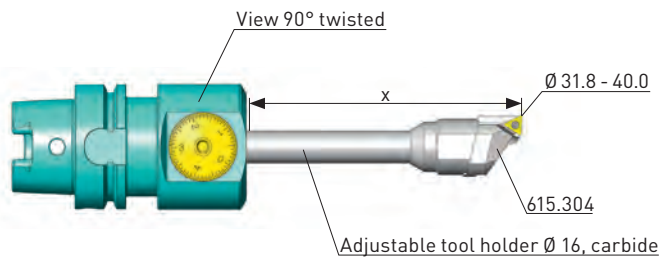


optimized

Workpiece material	Boring depth X [mm]	universal Ø 31.8 - 36.8 / 40.8 mm						optimized Ø 31.8 - 40.0 mm					
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.	Feed mm/U Ra 1.6 Max.	Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.	Feed mm/U Ra 1.6 Max.		
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	60	655.380	0.4	200	0.2 1.5	0.10 0.18	655.303A	0.8	350	0.2 1.5	0.14 0.22		
	80	655.380	0.4	200	0.2 1.2	0.10 0.14	655.390	0.8	300	0.2 1.2	0.14 0.20		
	100	655.380	0.4	170	0.2 1.0	0.10 0.10	655.380	0.4	250	0.2 1.0	0.10 0.16		
	120	655.373	0.2	130	0.2 0.8	0.06 0.10	655.380	0.4	160	0.2 0.8	0.10 0.14		
	140	655.373	0.2	80	0.2 0.6	0.06 0.08	655.370	0.2	80	0.2 0.6	0.06 0.12		
	160	655.363	0.1	25	0.1 0.4	0.04 0.08	655.363	0.1	30	0.1 0.4	0.04 0.10		
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	60	655.318	0.4	200	0.2 1.5	0.10 0.16	655.320	0.8	320	0.2 1.5	0.14 0.20	
	80	655.318	0.4	200	0.2 1.2	0.10 0.14	655.320	0.8	300	0.2 1.2	0.14 0.18		
	100	655.318	0.4	170	0.2 1.0	0.10 0.10	655.318	0.4	250	0.2 1.0	0.10 0.14		
	120	655.319	0.2	130	0.2 0.8	0.06 0.10	655.318	0.4	160	0.2 0.8	0.10 0.12		
	140	655.319	0.2	80	0.2 0.6	0.06 0.08	655.319	0.2	80	0.2 0.6	0.06 0.10		
	160	655.369	0.1	25	0.1 0.4	0.04 0.08	655.369	0.1	30	0.1 0.4	0.04 0.08		
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	60	655.388	0.4	240	0.2 1.5	0.10 0.20	655.397	0.8	950	0.2 1.5	0.14 0.30		
	80	655.388	0.4	240	0.2 1.2	0.10 0.16	655.397	0.8	650	0.2 1.2	0.14 0.25		
	100	655.388	0.4	200	0.2 1.0	0.10 0.14	655.398	0.8	400	0.2 1.0	0.14 0.20		
	120	655.378	0.2	180	0.2 0.8	0.06 0.12	655.388	0.4	250	0.2 0.8	0.10 0.16		
	140	655.378	0.2	110	0.2 0.6	0.06 0.10	655.378	0.2	120	0.2 0.6	0.06 0.12		
	160	655.378	0.2	30	0.2 0.4	0.06 0.10	655.378	0.2	40	0.2 0.4	0.06 0.10		
	Aluminium Cast alloys Si > 10% G-AlSi 12 G-AlSi17Cu4Mg	60	655.318	0.4	240	0.2 1.5	0.10 0.20	655.320	0.8	650	0.2 1.5	0.14 0.30	
	80	655.318	0.4	240	0.2 1.2	0.10 0.16	655.320	0.8	650	0.2 1.2	0.14 0.25		
	100	655.318	0.4	200	0.2 1.0	0.10 0.14	655.318	0.4	400	0.2 1.0	0.10 0.20		
	120	655.319	0.2	180	0.2 0.8	0.06 0.12	655.318	0.4	250	0.2 0.8	0.10 0.16		
	140	655.319	0.2	110	0.2 0.6	0.06 0.10	655.319	0.2	120	0.2 0.6	0.06 0.12		
	160	655.369	0.1	30	0.1 0.4	0.04 0.10	655.369	0.1	40	0.1 0.4	0.04 0.10		
S Titanium 3.7164	60	655.318	0.4	120	0.2 1.5	0.10 0.18	655.320	0.8	120	0.2 1.5	0.14 0.20		
	80	655.318	0.4	120	0.2 1.2	0.10 0.14	655.318	0.4	120	0.2 1.2	0.10 0.18		
	100	655.318	0.4	100	0.2 1.0	0.10 0.10	655.318	0.4	100	0.2 1.0	0.10 0.14		
	120	655.319	0.2	80	0.2 0.8	0.06 0.10	655.319	0.2	80	0.2 0.8	0.06 0.12		
	140	655.369	0.1	60	0.1 0.6	0.04 0.08	655.319	0.2	60	0.2 0.6	0.06 0.10		
	160	655.369	0.1	25	0.1 0.4	0.04 0.08	655.369	0.1	30	0.1 0.4	0.04 0.08		
	Ni-basic-, Co-basic-, Alloys	60	655.326	0.4	50	0.1 1.0	0.10 0.16	655.326	0.4	50	0.1 1.0	0.10 0.16	
	80	655.316	0.2	40	0.1 0.8	0.06 0.12	655.326	0.4	40	0.1 0.8	0.10 0.12		
	100	655.316	0.2	30	0.1 0.6	0.06 0.10	655.316	0.2	30	0.1 0.6	0.06 0.10		
	120	655.369	0.1	30	0.1 0.4	0.04 0.10	655.369	0.1	30	0.1 0.4	0.04 0.10		
	140	655.369	0.1	25	0.1 0.4	0.04 0.08	655.369	0.1	25	0.1 0.4	0.04 0.08		

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 40.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required

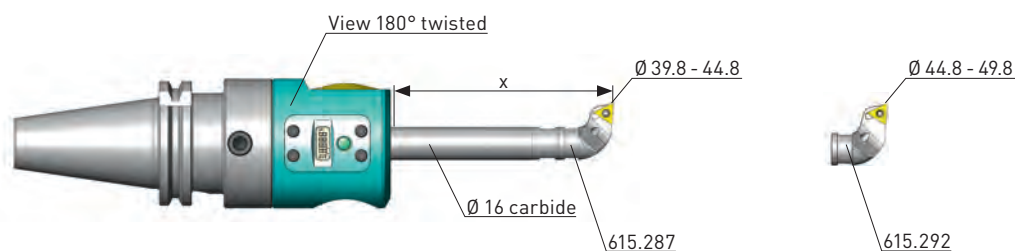


universal

Workpiece material	Boring depth X [mm]	universal Ø 39.8 - 44.8 / 49.8 mm							optimized Ø 39.8 - 54.0 mm						
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		Inserts		Vc	Allow. mm/Ø		Feed mm/U	
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10
	60	655.318	0.4	200	0.2	1.5	0.10	0.18	655.334	0.8	450	0.2	1.5	0.14	0.22
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.334	0.8	400	0.2	1.2	0.14	0.20
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.385	0.4	250	0.2	1.0	0.10	0.16
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.385	0.4	160	0.2	0.8	0.10	0.14
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.375	0.2	80	0.2	0.6	0.06	0.12
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.10
M Steel 850-1200 N/mm <sup>2</sup> 1.2083 1.2294 1.2312 1.2344 1.2764	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
K Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762 Stainless steels, austenitic 1.4301 1.4311 1.4401 1.4435 1.4571 Gray cast iron	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	350	0.2	1.5	0.14	0.20
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
	60	655.380	0.4	200	0.2	1.8	0.10	0.18	655.303A	0.8	350	0.2	1.8	0.14	0.22
	80	655.380	0.4	200	0.2	1.5	0.10	0.14	655.390	0.8	300	0.2	1.5	0.14	0.20
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

The insert holders 615.287 and 615.292 can be screwed on the same tool holder, but cover different boring ranges. The cutting data remain the same for both insert holders.

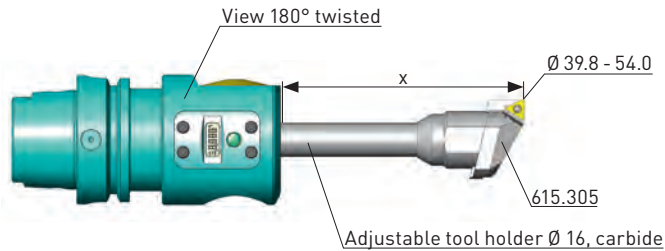

optimized


Workpiece material	Boring depth X [mm]	universal Ø 39.8 - 44.8 / 49.8 mm						optimized Ø 39.8 - 54.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	60	655.380	0.4	200	0.2	1.5	0.10	0.18	655.303A	0.8	350	0.2	1.5	0.14	0.22
	80	655.380	0.4	200	0.2	1.2	0.10	0.14	655.390	0.8	300	0.2	1.2	0.14	0.20
	100	655.380	0.4	170	0.2	1.0	0.10	0.10	655.380	0.4	250	0.2	1.0	0.10	0.16
	120	655.373	0.2	130	0.2	0.8	0.06	0.10	655.380	0.4	160	0.2	0.8	0.10	0.14
	140	655.373	0.2	80	0.2	0.6	0.06	0.08	655.370	0.2	80	0.2	0.6	0.06	0.12
	160	655.363	0.1	25	0.1	0.4	0.04	0.08	655.363	0.1	30	0.1	0.4	0.04	0.10
	60	655.318	0.4	200	0.2	1.5	0.10	0.16	655.320	0.8	320	0.2	1.5	0.14	0.20
	80	655.318	0.4	200	0.2	1.2	0.10	0.14	655.320	0.8	300	0.2	1.2	0.14	0.18
	100	655.318	0.4	170	0.2	1.0	0.10	0.10	655.318	0.4	250	0.2	1.0	0.10	0.14
	120	655.319	0.2	130	0.2	0.8	0.06	0.10	655.318	0.4	160	0.2	0.8	0.10	0.12
	140	655.319	0.2	80	0.2	0.6	0.06	0.08	655.319	0.2	80	0.2	0.6	0.06	0.10
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	60	655.388	0.4	240	0.2	1.5	0.10	0.20	655.397	0.8	950	0.2	1.5	0.14	0.30
	80	655.388	0.4	240	0.2	1.2	0.10	0.16	655.397	0.8	650	0.2	1.2	0.14	0.25
	100	655.388	0.4	200	0.2	1.0	0.10	0.14	655.398	0.8	400	0.2	1.0	0.14	0.20
	120	655.378	0.2	180	0.2	0.8	0.06	0.12	655.388	0.4	250	0.2	0.8	0.10	0.16
	140	655.378	0.2	110	0.2	0.6	0.06	0.10	655.378	0.2	120	0.2	0.6	0.06	0.12
	160	655.378	0.2	30	0.2	0.4	0.06	0.10	655.378	0.2	40	0.2	0.4	0.06	0.10
	60	655.318	0.4	240	0.2	1.5	0.10	0.20	655.320	0.8	650	0.2	1.5	0.14	0.30
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	80	655.318	0.4	240	0.2	1.2	0.10	0.16	655.320	0.8	650	0.2	1.2	0.14	0.25
	100	655.318	0.4	200	0.2	1.0	0.10	0.14	655.318	0.4	400	0.2	1.0	0.10	0.20
	120	655.319	0.2	180	0.2	0.8	0.06	0.12	655.318	0.4	250	0.2	0.8	0.10	0.16
	140	655.319	0.2	110	0.2	0.6	0.06	0.10	655.319	0.2	120	0.2	0.6	0.06	0.12
	160	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	40	0.1	0.4	0.04	0.10
	60	655.326	0.4	50	0.1	1.0	0.10	0.16	655.326	0.4	50	0.1	1.0	0.10	0.16
Titanium 3.7164	80	655.318	0.4	120	0.2	1.2	0.10	0.14	655.318	0.4	120	0.2	1.2	0.10	0.18
	100	655.318	0.4	100	0.2	1.0	0.10	0.10	655.318	0.4	100	0.2	1.0	0.10	0.14
	120	655.319	0.2	80	0.2	0.8	0.06	0.10	655.319	0.2	80	0.2	0.8	0.06	0.12
	140	655.369	0.1	60	0.1	0.6	0.04	0.08	655.319	0.2	60	0.2	0.6	0.06	0.10
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	30	0.1	0.4	0.04	0.08
	60	655.316	0.2	40	0.1	0.8	0.06	0.12	655.326	0.4	40	0.1	0.8	0.10	0.12
Ni-basic-, Co-basic-, Alloys	100	655.316	0.2	30	0.1	0.6	0.06	0.10	655.316	0.2	30	0.1	0.6	0.06	0.10
	120	655.369	0.1	30	0.1	0.4	0.04	0.10	655.369	0.1	30	0.1	0.4	0.04	0.10
	140	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08
	160	655.369	0.1	25	0.1	0.4	0.04	0.08	655.369	0.1	25	0.1	0.4	0.04	0.08

**When applying the optimized cutting data:**

The boring operation has to be done with an adjustable tool holder, clamped in centre position.

- the boring diameter of 54.0 mm may not be exceeded
- the use of a fine balanced tool shank or of an integral type of fine boring head is required




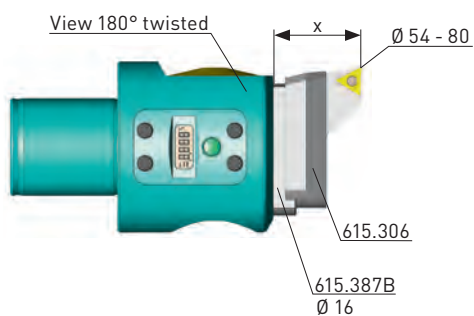


Workpiece material	Boring depth X [mm]	universal Ø 54.0-80.0 mm							
		Inserts Order No.	R	Vc m/min	Allow. mm/Ø Std. val. Max.		Feed mm/U Ra 1.6 Max.		
P Steel < 450 N/mm <sup>2</sup> 1.0037 1.0401 1.0715	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
M Stainless steels, ferritic, martensitic 1.4016 1.4024 1.4034 1.4762	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
K Gray cast iron GG15 GG 20 GG 25 GG 30	30	655.380	0.4	200	0.2	1.8	0.10	0.18	
	40	655.380	0.4	200	0.2	1.5	0.10	0.14	
	50	655.373	0.2	170	0.2	1.0	0.10	0.10	
	60	655.373	0.2	130	0.2	0.8	0.06	0.10	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

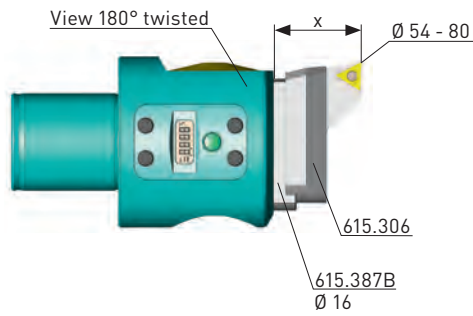

Workpiece material	Boring depth X [mm]	universal Ø 54.0-80.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	30	655.380	0.4	200	0.2	1.8	0.10	0.18	
	40	655.380	0.4	200	0.2	1.5	0.10	0.14	
	50	655.373	0.2	170	0.2	1.0	0.10	0.10	
	60	655.373	0.2	130	0.2	0.8	0.06	0.10	
K GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	30	655.388	0.4	240	0.2	1.5	0.10	0.20	
	40	655.388	0.4	240	0.2	1.2	0.10	0.16	
	50	655.378	0.2	200	0.2	1.0	0.10	0.14	
	60	655.378	0.2	180	0.2	0.8	0.06	0.12	
S Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	30	655.318	0.4	200	0.2	0.8	0.10	0.18	
	40	655.318	0.4	180	0.2	0.6	0.10	0.14	
	50	655.318	0.4	160	0.2	0.4	0.10	0.10	
	60	655.319	0.2	140	0.2	0.4	0.06	0.08	
S Titanium 3.7164	30	655.318	0.4	120	0.2	0.8	0.10	0.18	
	40	655.318	0.4	100	0.2	0.6	0.10	0.14	
	50	655.318	0.4	80	0.2	0.4	0.10	0.10	
	60	655.319	0.2	60	0.2	0.4	0.06	0.08	
S Ni-basic-, Co-basic-, Alloys	30	655.318	0.4	50	0.2	0.8	0.10	0.18	
	40	655.318	0.4	40	0.2	0.6	0.10	0.14	
	50	655.318	0.4	40	0.2	0.4	0.10	0.10	
	60	655.319	0.2	30	0.2	0.4	0.06	0.08	

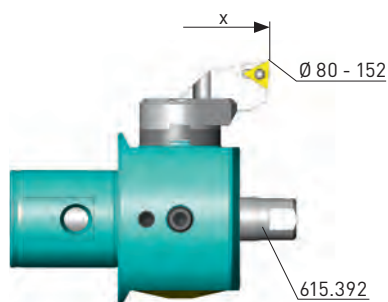


Workpiece material	Boring depth X [mm]	universal Ø 80.0-152.0 mm								
		Inserts		Vc	Allow. mm/Ø		Feed mm/U			
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.		
P	Steel < 450 N/mm <sup>2</sup>	80	655.334	0.8	450	0.2	2.5	0.14	0.25	
		115	655.334	0.8	380	0.2	2.5	0.14	0.25	
		145	655.324	0.4	250	0.2	2.5	0.10	0.20	
		175	655.324	0.4	150	0.2	2.0	0.10	0.20	
		1.0037	175	655.324	0.4	150	0.2	2.0	0.10	0.20
		1.0401	205	655.375	0.2	110	0.2	1.5	0.06	0.15
		1.0715	220	655.375	0.2	80	0.1	1.0	0.06	0.15
			310	655.375	0.2	100	0.2	1.0	0.06	0.15
	Steel 450-850 N/mm <sup>2</sup>	80	655.334	0.8	450	0.2	2.5	0.14	0.25	
		115	655.334	0.8	380	0.2	2.5	0.14	0.25	
		145	655.324	0.4	250	0.2	2.5	0.10	0.20	
		1.0050	145	655.324	0.4	250	0.2	2.5	0.10	0.20
		1.0503	175	655.324	0.4	150	0.2	2.0	0.10	0.20
		1.1141	205	655.375	0.2	110	0.2	1.5	0.06	0.15
		1.1191	220	655.375	0.2	80	0.1	1.0	0.06	0.15
		1.5752	310	655.375	0.2	100	0.2	1.0	0.06	0.15
	Steel 850-1200 N/mm <sup>2</sup>	80	655.320	0.8	350	0.2	2.0	0.14	0.25	
		115	655.320	0.8	300	0.2	2.0	0.14	0.25	
		1.2083	145	655.318	0.4	240	0.2	2.0	0.10	0.20
		1.2294	175	655.318	0.4	140	0.2	1.3	0.10	0.20
		1.2312	205	655.319	0.2	100	0.2	1.3	0.06	0.15
		1.2344	220	655.319	0.2	70	0.1	0.8	0.06	0.15
		1.2764	310	655.319	0.2	100	0.2	0.8	0.06	0.15
		M	Stainless steels, ferritic, martensitic	80	655.320	0.8	350	0.2	2.0	0.14
115	655.320			0.8	300	0.2	2.0	0.14	0.25	
145	655.318			0.4	240	0.2	2.0	0.10	0.20	
1.4016	175			655.318	0.4	140	0.2	1.3	0.10	0.20
1.4024	205			655.319	0.2	100	0.2	1.3	0.06	0.15
1.4034	220			655.319	0.2	70	0.1	0.8	0.06	0.15
1.4762	310			655.319	0.2	100	0.2	0.8	0.06	0.15
Stainless steels, austenitic	80			655.320	0.8	300	0.2	2.0	0.14	0.25
	115		655.320	0.8	280	0.2	2.0	0.14	0.25	
	1.4301		145	655.318	0.4	220	0.2	2.0	0.10	0.20
	1.4311		175	655.318	0.4	140	0.2	1.3	0.10	0.20
	1.4401		205	655.319	0.2	100	0.2	1.3	0.06	0.15
	1.4435		220	655.319	0.2	70	0.1	0.8	0.06	0.15
	1.4571		310	655.319	0.2	100	0.2	0.8	0.06	0.15
	K		Gray cast iron	80	655.303A	0.8	350	0.2	2.5	0.14
115				655.303A	0.8	350	0.2	2.5	0.14	0.25
GG 15		145	655.303A	0.8	240	0.2	2.5	0.10	0.20	
GG 20		175	655.302A	0.4	150	0.2	2.0	0.10	0.20	
GG 25		205	655.302A	0.4	100	0.2	1.5	0.10	0.20	
GG 30		220	655.301A	0.2	70	0.1	1.0	0.06	0.15	
		310	655.301A	0.2	100	0.2	1.0	0.06	0.15	

**Caution:**

The given cutting data are guide values. In any case, they have to be adapted to the actual working conditions.

Use tool holder 615.226 with the coolant nozzle 615.392 when using a peripheral insert holder.

Spacer 626.907 is required for certain diameters within the standard range.

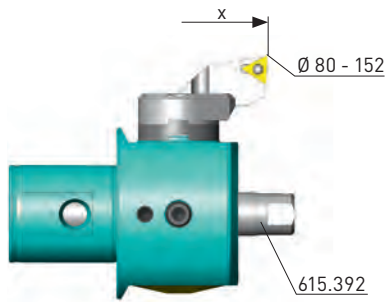

Workpiece material	Boring depth X [mm]	universal Ø 80.0-152.0 mm							
		Inserts		Vc	Allow. mm/Ø		Feed mm/U		
		Order No.	R	m/min	Std. val.	Max.	Ra 1.6	Max.	
K GGG < 500 N/mm <sup>2</sup> GGG 40 GGG 50	80	655.390	0.8	350	0.2	2.5	0.14	0.25	
	115	655.390	0.8	350	0.2	2.5	0.14	0.25	
	145	655.380	0.4	240	0.2	2.5	0.10	0.20	
	175	655.380	0.4	150	0.2	2.0	0.10	0.20	
	205	655.370	0.2	100	0.2	1.5	0.06	0.15	
	220	655.370	0.2	70	0.1	1.0	0.06	0.15	
	310	655.370	0.2	100	0.2	1.0	0.06	0.15	
	GGG < 800 N/mm <sup>2</sup> GGG 60 GGG 70 GGG 80	80	655.320	0.8	320	0.2	2.0	0.14	0.25
		115	655.320	0.8	300	0.2	2.0	0.14	0.25
		145	655.318	0.4	240	0.2	2.0	0.10	0.20
		175	655.318	0.4	140	0.2	1.3	0.10	0.20
		205	655.319	0.2	100	0.2	1.3	0.06	0.15
		220	655.319	0.2	70	0.1	0.8	0.06	0.15
		310	655.319	0.2	100	0.2	0.8	0.06	0.15
N Aluminium Wrought alloys Si < 10% 3.1354 3.2315 3.3545 3.4365	80	655.398	0.8	600	0.2	2.5	0.14	0.25	
	115	655.398	0.8	500	0.2	2.5	0.14	0.25	
	145	655.398	0.8	400	0.2	2.5	0.14	0.20	
	175	655.388	0.4	250	0.2	2.5	0.10	0.20	
	205	655.388	0.4	170	0.2	2.0	0.10	0.20	
	220	655.378	0.2	100	0.2	1.5	0.06	0.15	
	310	655.378	0.2	100	0.2	1.5	0.06	0.15	
	Aluminium Cast alloys Si > 10% G-ALSi 12 G-ALSi17Cu4Mg	80	655.320	0.8	600	0.2	2.5	0.14	0.25
115		655.320	0.8	500	0.2	2.5	0.14	0.25	
145		655.320	0.8	400	0.2	2.5	0.14	0.20	
175		655.318	0.4	250	0.2	2.5	0.10	0.20	
205		655.318	0.4	170	0.2	2.0	0.10	0.20	
220		655.319	0.2	100	0.2	1.5	0.06	0.15	
310		655.319	0.2	100	0.2	1.5	0.06	0.15	
S Titanium 3.7164	80	655.320	0.8	120	0.2	2.5	0.14	0.25	
	115	655.320	0.8	120	0.2	2.5	0.14	0.25	
	145	655.318	0.4	100	0.2	2.5	0.10	0.20	
	175	655.318	0.4	80	0.2	2.0	0.10	0.20	
	205	655.318	0.4	70	0.2	1.5	0.10	0.20	
	220	655.319	0.2	60	0.1	1.0	0.06	0.15	
	310	655.319	0.2	60	0.1	1.0	0.06	0.15	
	Ni-basic-, Co-basic-, Alloys	80	655.326	0.4	50	0.2	1.0	0.10	0.20
		115	655.326	0.4	50	0.2	1.0	0.10	0.20
		145	655.326	0.4	40	0.2	1.0	0.10	0.20
		175	655.316	0.2	30	0.1	0.8	0.06	0.15
		205	655.316	0.2	30	0.1	0.8	0.06	0.15
		220	655.316	0.2	30	0.1	0.6	0.06	0.15
		310	655.316	0.2	30	0.1	0.6	0.06	0.15

## Application advice

### Polycrystalline cubic boron nitride CBN


CBN cutting materials are substantially harder than sintered carbide and exceptionally heat-resistant. Depending on the design (with or without land on the cutting edge) they are specially suitable for boring hardened steel types (52-65 HRC), hard cast steel, cast iron and hard nickel alloys.

### Polycrystalline diamond PCD

PCD cutting edges are extremely hard and abrasion-resistant. They permit the high-speed finish-machining of non-ferrous and nonmetallic materials.

## Workpiece / Cutting speed

Workpiece material / Cutting speed Vc (m/min)

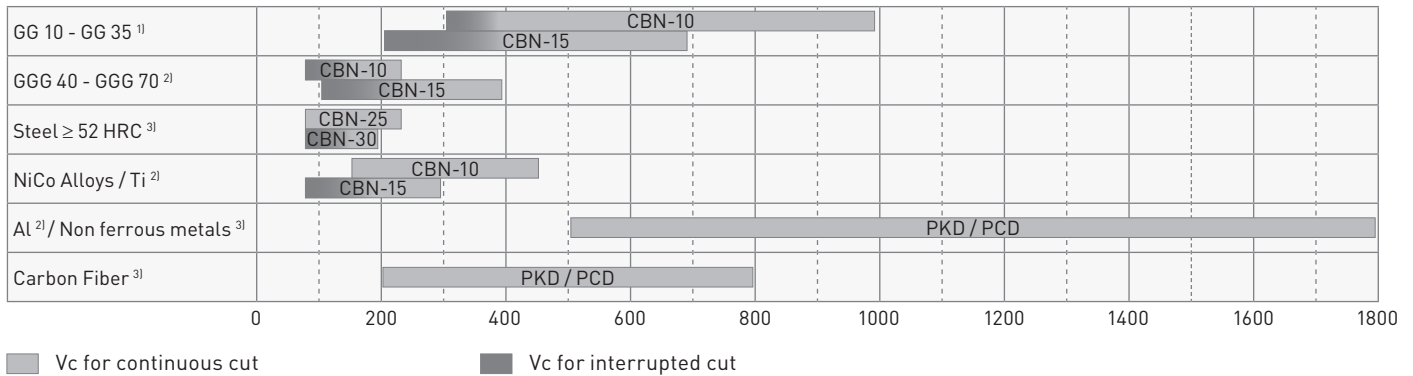

### Coolant


- <sup>1)</sup> Dry- or wet boring possible
- <sup>2)</sup> Wet boring recommended
- <sup>3)</sup> Dry boring recommended

### Cutting aluminium with PCD

In most cases the max cutting speed is not determined by the relation of cutting material / workpiece material but by restrictions of the rotating speed, the tool length or the chip control.

## Feed / Stock allowance

Feed [mm/rev] and stock allowance in relation to the insert nose radius and the diameter - length ratio of the tool. Limiting values depend on the machine tool and have to be determined by tests.

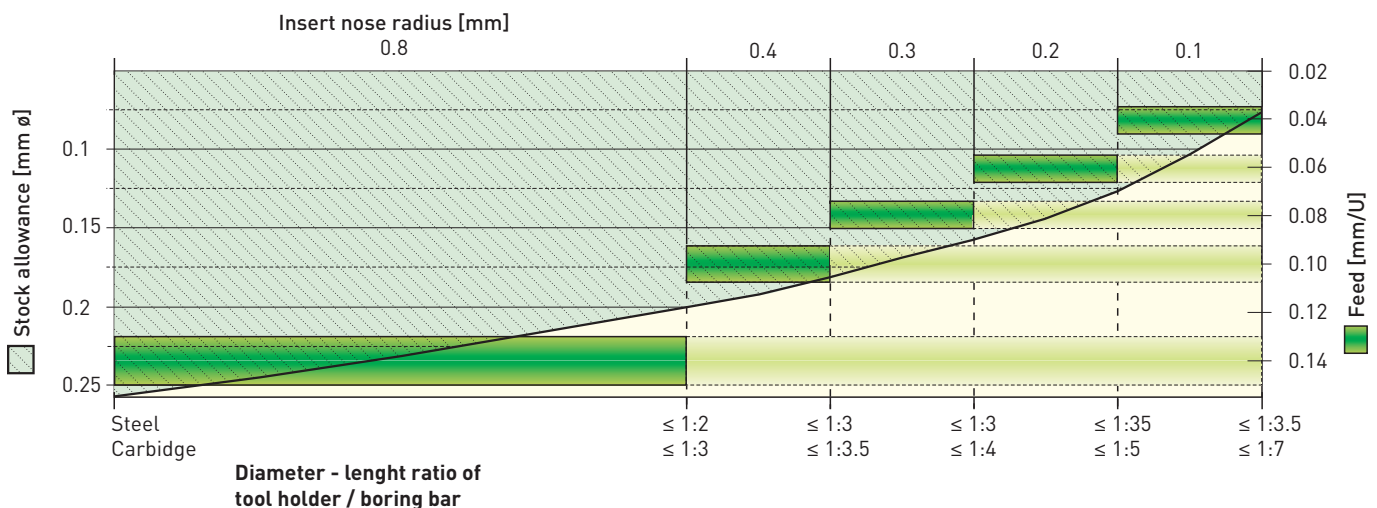





The complete product overview and accessories can be found in the BIG KAISER main catalog.



A Member of the BIG DAISHOWA Group

**BIG KAISER Precision Tooling Ltd.**

Glattalstrasse 516 | CH-8153 Rümlang | T: +41 44 817 92 00 | F: +41 44 817 92 01 | info@ch.bigkaiser.com | www.bigkaiser.com