



**ALLIED MACHINE  
& ENGINEERING**

Holemaking Solutions for Today's Manufacturing



Boring



Reaming



Burnishing



Threading



Specials



## BT-A Drill

▶ *DRILLING*

BTA-STS (Single Tube System)  
Deep Hole Machining



SECTION

---

# A93

---

BT-A Drill

# BT-A Drill

## BTA (STS) Deep Hole Machining System

► **Diameter Range:** 0.5110" - 1.8829" (12.98 mm - 47.82 mm)



### Material Ejection with Efficiency

The BT-A drill (using the single tube system or STS) conquers deep hole applications in ways other drills simply cannot. The internal ejection system flushes chips and debris from the hole with no interference to the cutting process.

By utilizing the countless advantages of the T-A® drill insert, the BT-A design significantly increases penetration rates over brazed heads and traditional gun drills. A specific BT geometry has also been developed to increase productivity in these types of drilling applications.

Excellent hole size and finish.	Optimizes chip evacuation.	Up to <b>2x</b> the penetration rate of traditional BTA heads.
---------------------------------	----------------------------	--

### Applicable Industries



Aerospace



Agriculture



Automotive



Heavy Equipment



Hydraulics



Tool, Mold, and Die



Oil & Gas

Your safety and the safety of others is very important. This catalog contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalog, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalog. Safety messages follow these words.

#### **WARNING**

**WARNING** (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.


**NOTICE** means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

**NOTE** and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit [www.alliedmachine.com](http://www.alliedmachine.com) for the most up-to-date information and procedures.

**Reference Icons**

The following icons will appear throughout the catalog to help you navigate between products.



**T-A® Inserts**

Refers to the range of inserts that connect with the corresponding holders

**Introduction Information**

System Overview . . . . . 2  
 Product Nomenclature . . . . . 3

**T-A Drill Series**

0 Series . . . . . 4  
 1 Series . . . . . 5  
 2 Series . . . . . 6  
 3 Series . . . . . 7


Series	Diameter Range	
	Imperial (inch)	Metric (mm)
<b>0</b>	0.5110 - 0.6959	12.98 - 17.67
<b>1</b>	0.6900 - 0.9609	17.53 - 24.40
<b>2</b>	0.9610 - 1.3809	24.41 - 35.06
<b>3</b>	1.3530 - 1.8829	34.37 - 47.82



## System Overview

### BTA Machining

BTA machining is the reverse of typical gun drilling systems. The BT-A drill is a drill head consisting of a holder body and a replaceable tip T-A® insert. The drill head threads into an STS (single tube system) cylindrical tube with a diameter smaller than the drill head. The difference in diameter forms an annular area between the hole and the tube OD. This allows high-volume coolant to be directed to the cutting edge.


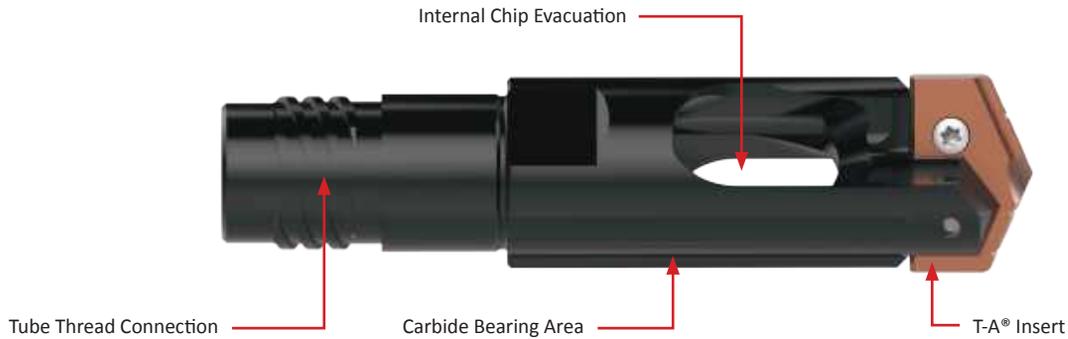


- ✓ **Improve hole straightness**  
with the laser clad bearing area
- ✓ **Eliminate the need for resharpener**  
with replaceable cutting edges
- ✓ **Reduce your inventory**  
with the replaceable T-A® feature
- ✓ **Compatibility**  
heads are compatible with standard BTA-STS systems
- ✓ **Balanced cutting forces**
- ✓ **Patented design**

**T-A Insert: BT-A Geometry (-BT)**

- Low thrust web geometry reduces Z-axis requirements.
- Lip geometry identical to the tiny chip (-TC) for improved chip formation.
- Polished cutting surface eliminates material buildup.



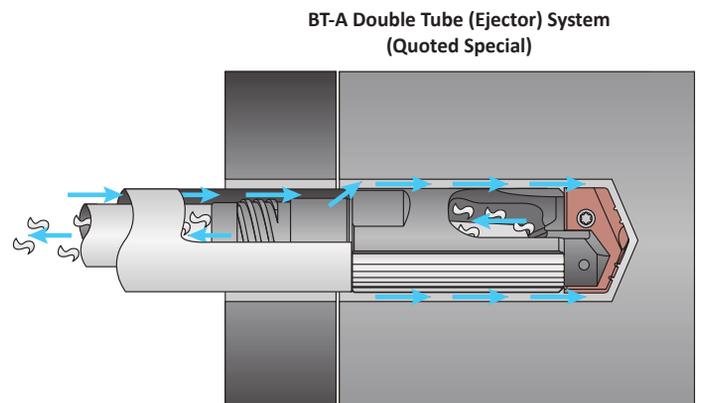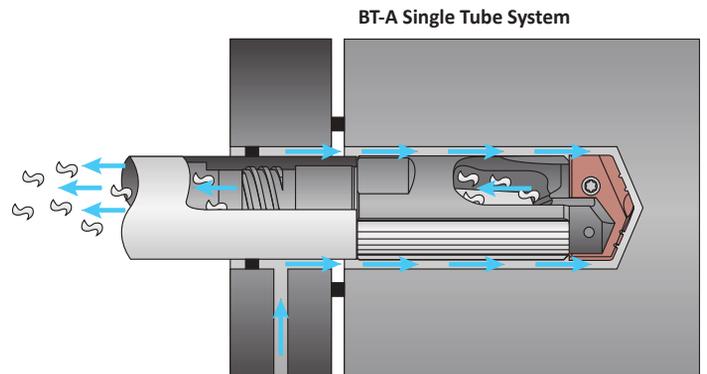


**2x INCREASE** in penetration rates over traditional BTA heads

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## Product Nomenclature

### BT-A Drill Holders

<b>BTA2</b>	<b>804</b>	-	<b>1.1299</b>
1	2		3




1. BT-A Drill T-A® Insert Series
<b>BTA0</b> = 0 series T-A insert
<b>BTA1</b> = 1 series T-A insert
<b>BTA2</b> = 2 series T-A insert
<b>BTA3</b> = 3 series T-A insert

2. Tube Size		
794	800	806
795	801	807
796	802	808
797	803	809
798	804	810
799	805	811

3. Diameter
<b>0.7344</b> = Inch
<b>25.00</b> = Metric

#### Reference Key

Symbol	Attribute
$D_1$	Drill insert range
$L_1$	Overall length
$L_3$	Holder reference length
$L_7$	Shank length

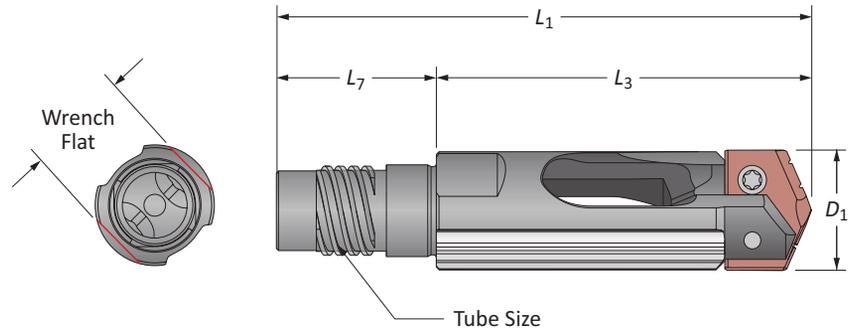

### BT-A Drill Tubes

<b>BTAT</b>	-	<b>804</b>	-	<b>63</b>
1		2		3


1. BT-A Drill T-A Insert Series
<b>BTAT</b> = BT-A Tube

2. Tube Size		
794	800	806
795	801	807
796	802	808
797	803	809
798	804	810
799	805	811

3. Length
<b>63</b> = Standard
<b>102</b> = Long

#### Reference Key



Symbol	Attribute
$D_1$	Body diameter
$ID_1$	Internal diameter
$L_1$	Overall length

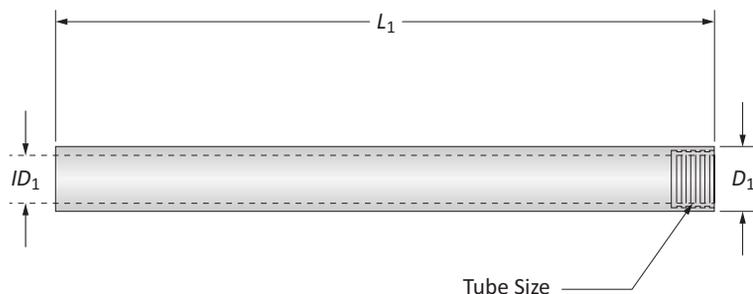




## BT-A Drill Holders

0 Series | Diameter Range: 0.5110" - 0.6959" (12.98 mm - 17.67 mm)

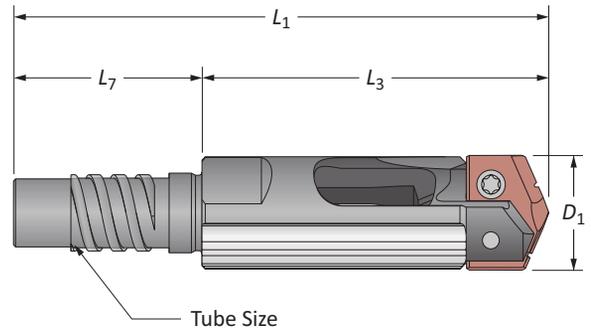


Tube Size	$D_1$	Holder				Part No.	 T-A® Insert	Wrench Flat (mm)
		$L_3$	$L_1$	$L_7$				
i	794	0.5110 - 0.5359	1-45/64	2-39/64	29/32	<b>BTA0-794-X.XXXX</b>	1C10H-XXXX-BT	11
	795	0.5360 - 0.5759	1-3/4	2-21/32	29/32	<b>BTA0-795-X.XXXX</b>	1C10H-XXXX-BT	12
	796	0.5760 - 0.6149	1-13/16	2-3/4	61/64	<b>BTA0-796-X.XXXX</b>	1C10H-XXXX-BT	13
	797	0.6150 - 0.6579	1-13/16	2-3/4	61/64	<b>BTA0-797-X.XXXX</b>	1C10H-XXXX-BT	14
	798	0.6580 - 0.6959	1-25/32	2-47/64	61/64	<b>BTA0-798-X.XXXX</b>	1C10H-XXXX-BT	15
m	794	12.98 - 13.61	43.4	66.4	23	<b>BTA0-794-XX.XX</b>	1C10H-XXXX-BT	11
	795	13.62 - 14.63	44.6	67.6	23	<b>BTA0-795-XX.XX</b>	1C10H-XXXX-BT	12
	796	14.64 - 15.62	45.9	69.9	24	<b>BTA0-796-XX.XX</b>	1C10H-XXXX-BT	13
	797	15.63 - 16.71	45.9	69.9	24	<b>BTA0-797-XX.XX</b>	1C10H-XXXX-BT	14
	798	16.72 - 17.67	45.3	69.3	24	<b>BTA0-798-XX.XX</b>	1C10H-XXXX-BT	15

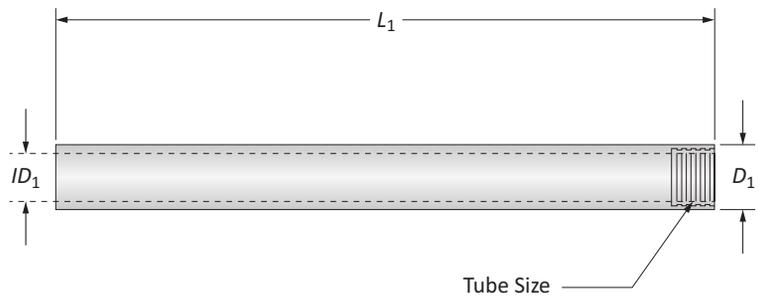

Tube Size	Tube			Part No.	
	$D_1$	$ID_1$	$L_1$		
i	794	0.433	0.276	63	<b>BTAT794-63</b>
	794	0.433	0.276	102	<b>BTAT794-102</b>
	795	0.472	0.315	63	<b>BTAT795-63</b>
	795	0.472	0.315	102	<b>BTAT795-102</b>
	796	0.512	0.335	63	<b>BTAT796-63</b>
	796	0.512	0.335	102	<b>BTAT796-102</b>
	797	0.551	0.354	63	<b>BTAT797-63</b>
	797	0.551	0.354	102	<b>BTAT797-102</b>
	798	0.591	0.394	63	<b>BTAT798-63</b>
	798	0.591	0.394	102	<b>BTAT798-102</b>


Section A30




i = Imperial (in)  
m = Metric (mm)

### BT-A Drill Holders


1 Series | Diameter Range: 0.6900" - 0.9609" (17.53 mm - 24.40 mm)

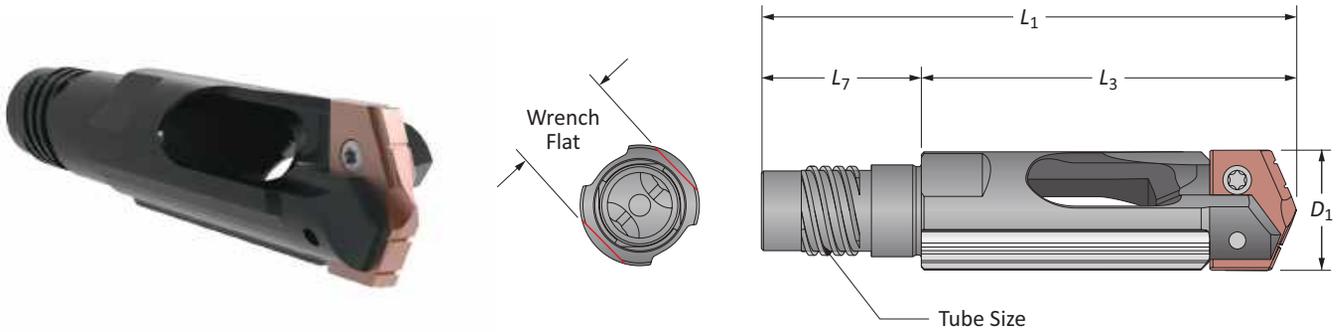

Tube Size	$D_1$	Holder			Part No.	 T-A® Insert	Wrench Flat (mm)	
		$L_3$	$L_1$	$L_7$				
i	799	0.6900 - 0.7449	2-15/64	3-9/32	63/64	BTA1-799-X.XXXX	1C11H-XXXX-BT	16
	800	0.7450 - 0.7879	2-5/16	3-27/64	1-7/64	BTA1-800-X.XXXX	1C11H-XXXX-BT	17
	801	0.7880 - 0.8589	2-11/32	3-35/64	1-13/64	BTA1-801-X.XXXX	1C11H-XXXX-BT	18
	802	0.8590 - 0.9489	2-25/64	3-11/16	1-19/64	BTA1-802-X.XXXX	1C11H-XXXX-BT	19
	803	0.9490 - 0.9609	2-33/64	3-13/16	1-19/64	BTA1-803-X.XXXX	1C11H-XXXX-BT	21
m	799	17.53 - 18.92	58.2	83.2	25	BTA1-799-XX.XX	1C11H-XXXX-BT	16
	800	18.93 - 20.01	58.8	86.8	28	BTA1-800-XX.XX	1C11H-XXXX-BT	17
	801	20.02 - 21.81	59.4	89.9	30.5	BTA1-801-XX.XX	1C11H-XXXX-BT	18
	802	21.82 - 24.10	60.7	93.7	33	BTA1-802-XX.XX	1C11H-XXXX-BT	19
	803	24.11 - 24.40	63.9	96.9	33	BTA1-803-XX.XX	1C11H-XXXX-BT	21

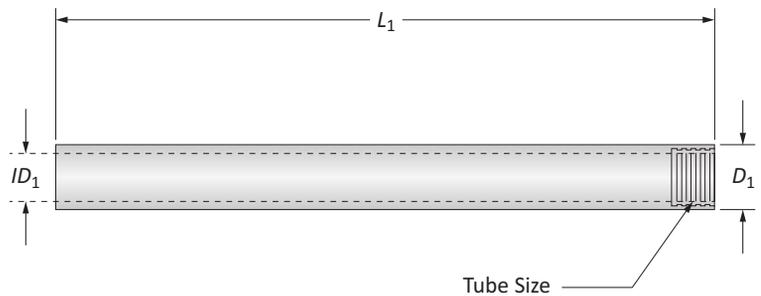

Tube Size	Tube			Part No.	
	$D_1$	$ID_1$	$L_1$		
i	799	0.630	0.413	63	BTAT799-63
	799	0.630	0.413	102	BTAT799-102
	800	0.669	0.453	63	BTAT800-63
	800	0.669	0.453	102	BTAT800-102
	801	0.709	0.472	63	BTAT801-63
	801	0.709	0.472	102	BTAT801-102
	802	0.787	0.512	63	BTAT802-63
	802	0.787	0.512	102	BTAT802-102
	803	0.866	0.551	63	BTAT803-63
	803	0.866	0.551	102	BTAT803-102





i = Imperial (in)  
m = Metric (mm)




## BT-A Drill Holders

2 Series | Diameter Range: 0.9610" - 1.3809" (24.41 mm - 35.06 mm)

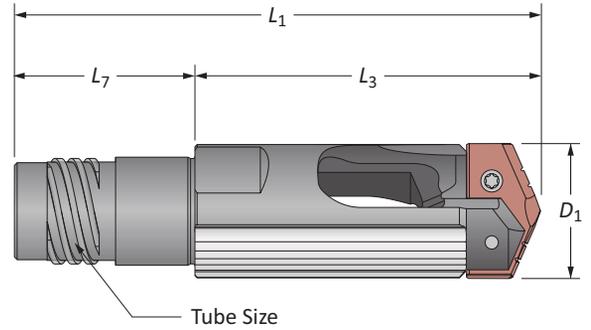


Tube Size	Holder				Part No.	T-A® Insert	Wrench Flat (mm)	
	$D_1$	$L_3$	$L_1$	$L_7$				
i	803	0.9610 - 1.0399	3-3/32	4-25/64	1-19/64	<b>BTA2-803-X.XXXX</b>	1C12H-XXXX-BT	21
	804	1.0400 - 1.1299	3	4-3/32	1-7/64	<b>BTA2-804-X.XXXX</b>	1C12H-XXXX-BT	22
	805	1.1300 - 1.2209	2-31/32	4-25/64	1-27/64	<b>BTA2-805-X.XXXX</b>	1C12H-XXXX-BT	25
	806	1.2210 - 1.3119	3-1/16	4-31/64	1-27/64	<b>BTA2-806-X.XXXX</b>	1C12H-XXXX-BT	27
	807	1.3120 - 1.3809	3-1/16	4-31/64	1-27/64	<b>BTA2-807-X.XXXX</b>	1C12H-XXXX-BT	30
m	803	24.41 - 26.41	78.5	111.5	33	<b>BTA2-803-XX.XX</b>	1C12H-XXXX-BT	21
	804	26.42 - 28.70	75.9	103.9	28	<b>BTA2-804-XX.XX</b>	1C12H-XXXX-BT	22
	805	28.71 - 31.01	75.4	111.4	36	<b>BTA2-805-XX.XX</b>	1C12H-XXXX-BT	25
	806	31.02 - 33.32	77.9	113.8	36	<b>BTA2-806-XX.XX</b>	1C12H-XXXX-BT	27
	807	33.33 - 35.06	77.9	113.8	36	<b>BTA2-807-XX.XX</b>	1C12H-XXXX-BT	30

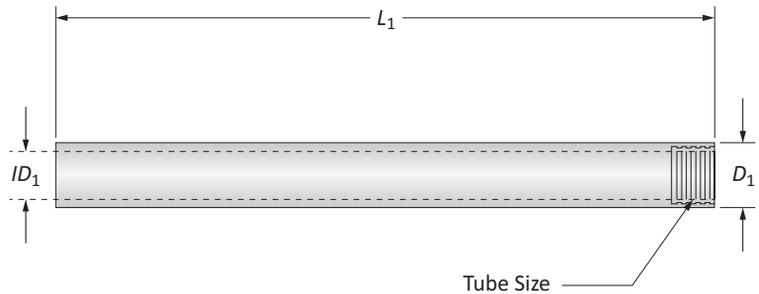

Tube Size	Tube			Part No.	
	$D_1$	$ID_1$	$L_1$		
i	803	0.866	0.551	63	<b>BTAT803-63</b>
	803	0.866	0.551	102	<b>BTAT803-102</b>
	804	0.945	0.610	63	<b>BTAT804-63</b>
	804	0.945	0.610	102	<b>BTAT804-102</b>
	805	1.024	0.669	63	<b>BTAT805-63</b>
	805	1.024	0.669	102	<b>BTAT805-102</b>
	806	1.102	0.728	102	<b>BTAT806-102</b>
	807	1.181	0.787	102	<b>BTAT807-102</b>


### Section A30




i = Imperial (in)  
m = Metric (mm)

### BT-A Drill Holders


3 Series | Diameter Range: 1.3530" - 1.8829" (34.37 mm - 47.82 mm)

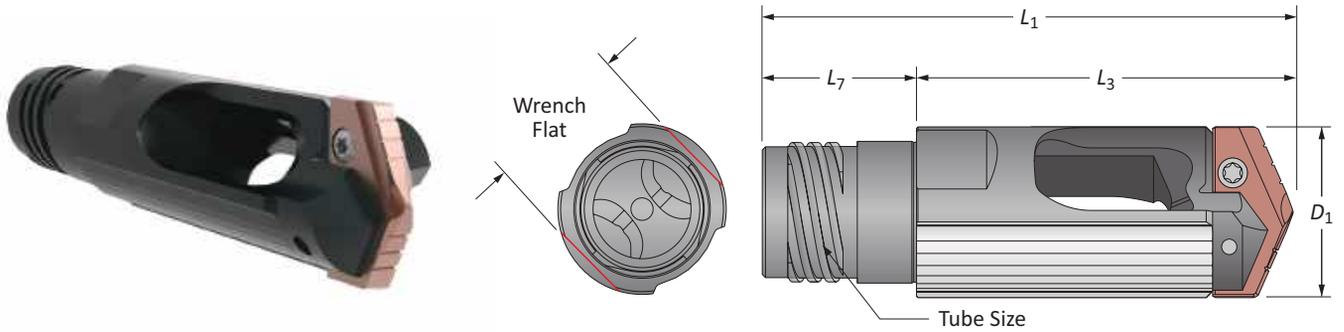

Tube Size	$D_1$	Holder			Part No.	 T-A® Insert	Wrench Flat (mm)	
		$L_3$	$L_1$	$L_7$				
i	807	1.3530 - 1.4259	3-13/16	5-15/64	1-27/64	BTA3-807-X.XXXX	1C13H-XXXX-BT	30
	808	1.4260 - 1.5599	3-15/16	5-11/16	1-3/4	BTA3-808-X.XXXX	1C13H-XXXX-BT	32
	809	1.5600 - 1.6929	4-1/16	5-3/4	1-11/16	BTA3-809-X.XXXX	1C13H-XXXX-BT	36
	810	1.6930 - 1.8509	4-1/64	5-45/64	1-11/16	BTA3-810-X.XXXX	1C13H-XXXX-BT	41
	811	1.8510 - 1.8829	4-1/16	5-3/4	1-11/16	BTA3-811-X.XXXX	1C13H-XXXX-BT	41
m	807	34.37 - 36.22	96.8	132.8	36	BTA3-807-XX.XX	1C13H-XXXX-BT	30
	808	36.23 - 39.62	100.0	144.4	44.5	BTA3-808-XX.XX	1C13H-XXXX-BT	32
	809	39.63 - 43.00	103.1	146.2	43	BTA3-809-XX.XX	1C13H-XXXX-BT	36
	810	43.01 - 47.01	101.9	144.9	43	BTA3-810-XX.XX	1C13H-XXXX-BT	41
	811	47.02 - 47.82	103.2	146.2	43	BTA3-811-XX.XX	1C13H-XXXX-BT	41

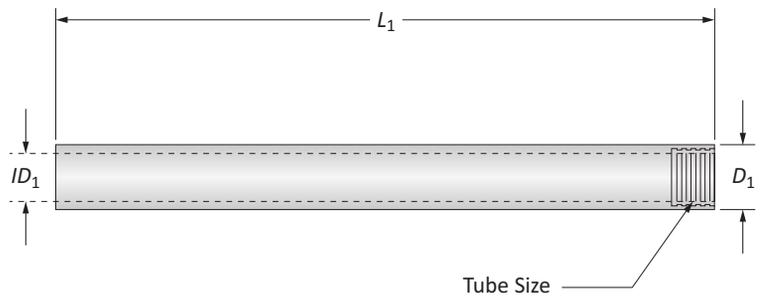

Tube Size	Tube			Part No.	
	$D_1$	$ID_1$	$L_1$		
i	807	1.181	0.787	102	BTAT807-102
	808	1.299	0.906	102	BTAT808-102
	809	1.417	0.984	102	BTAT809-102
	810	1.535	1.102	102	BTAT810-102
	811	1.693	1.220	102	BTAT811-102



i = Imperial (in)  
m = Metric (mm)

# Guaranteed Test / Demo Application Form

Distributor PO # \_\_\_\_\_

The following must be filled out completely before your test will be considered.

**IMPORTANT:** For processing, send purchase order to your Allied Field Sales Engineer (FSE). Please clearly mark the paperwork as "Test Order."

## Distributor Information

Company Name: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Account Number: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Email: \_\_\_\_\_

## End User Information

Company Name: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Industry: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Email: \_\_\_\_\_

**Current Process** List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing.

\_\_\_\_\_

\_\_\_\_\_

**Test Objective** List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.).

\_\_\_\_\_

\_\_\_\_\_

## Application Information

Hole Diameter: _____ in/mm	Tolerance: _____	Material: _____ (4150, A36, cast iron, etc.)
Preexisting Diameter: _____ in/mm	Depth of Cut: _____ in/mm	Hardness: _____ (BHN, Rc)
Required Finish: _____ RMS	State: _____	(Casting, hot rolled, forging)

## Machine Information

Machine Type: _____ (Lathe, screw machine, machine center, etc.)	Builder: _____ (Haas, Mori Seiki, etc.)	Model #: _____
Shank Required: _____ (CAT50, Morse taper, etc.)	Power: _____ HP/KW	
Rigidity: _____	Orientation: _____	Tool Rotating: _____
<input type="checkbox"/> Excellent	<input type="checkbox"/> Vertical	<input type="checkbox"/> Yes
<input type="checkbox"/> Good	<input type="checkbox"/> Horizontal	<input type="checkbox"/> No
<input type="checkbox"/> Poor		Thrust: _____ lbs/N

## Coolant Information

Coolant Delivery: _____ (Through tool, flood)	Coolant Pressure: _____ PSI / bar
Coolant Type: _____ (Air mist, oil, synthetic, water soluble, etc.)	Coolant Volume: _____ GPM / LPM

## Requested Tooling

QTY	Item Number

QTY	Item Number



**Allied Machine & Engineering**  
 120 Deeds Drive  
 Dover, OH 44622

Telephone: (330) 343-4283  
 Toll Free USA & Canada: (800) 321-5537  
 Email: info@alliedmachine.com

## Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine & Engineering is registered to ISO 9001:2015 by DQS.



Wohlhaupter GmbH is registered to ISO 9001:2015 by QUACERT.



Allied Machine & Engineering Co. Europe Ltd. is registered to ISO 9001:2015 by bsi.

## United States

**Allied Machine & Engineering**  
120 Deeds Drive  
Dover OH 44622  
United States

**Phone:**  
+1.330.343.4283

**Toll Free USA and Canada:**  
800.321.5537

**Toll Free USA and Canada:**  
800.223.5140

**Allied Machine & Engineering**  
485 W Third Street  
Dover OH 44622  
United States

**Phone:**  
+1.330.343.4283

**Toll Free USA and Canada:**  
800.321.5537

## Europe

**Allied Machine & Engineering Co. (Europe) Ltd**  
93 Vantage Point  
Pensnett Estate  
Kingswinford  
West Midlands  
DY6 7FR England

**Phone:**  
+44 (0) 1384 400 900

**Wohlhaupter® GmbH**  
Maybachstrasse 4  
Postfach 1264  
72636 Frickenhausen  
Germany

**Phone:**  
+49 (0) 7022 408-0

## Asia

**Wohlhaupter® India Pvt. Ltd.**  
B-23, 3rd Floor  
B Block Community Centre  
Janakpuri, New Delhi - 110058  
India

**Phone:**  
+91 (0) 11.41827044

Your local Allied Machine representative:

[www.alliedmachine.com](http://www.alliedmachine.com)

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS.

Wohlhaupter GmbH is registered to **ISO 9001:2015** by QUACERT.

Allied Machine & Engineering Co. (Europe) Ltd is registered to **ISO 9001:2015** by bsi.

